CLICK®
Scolmore GROUP

WIRING
ACCESSORIES

ISSUE 11



SCOLMORE.COM

Welcome to Wiring Accessories

...the complete range of Electrical Accessories

Scolmore® Group is one of the UK's leading manufacturers of electrical accessories. The company is proud to be a British-based, family-run business with an international reputation for quality, innovation and exemplary customer service.

From our Head Office in the Midlands, we design, develop and manufacture an ever expanding product range for distribution throughout the UK and worldwide.

The Click® Wiring Accessories range remains the number one choice of electricians and contractors who value the flexibility of the modular based range, as well as the one-stop solution that the comprehensive offer allows.

Our online ordering service is supported by automated order picking and processing procedures which enables us to offer service levels we believe are unprecedented in the industry.

The company is committed to harnessing the very latest technologies and developing superior-performing, competitively-priced products which allow installation projects to be completed quickly and easily.


CLICKsmart
deco PLUS
deco
define
definity
MODE
polar
Part M
GRIDPRO
MINIGRID
new media
essentials
curva
flow

Whats new...

HOTEL
ACCESSORY PLATES







ILLUMINATED
SWITCHES

KEY LOCKABLE
SWITCHES & SOCKETS

Did you know?

All Mode® and Polar™ accessories are covered by our

20 YEAR
NO QUIBBLE GUARANTEE



DOUBLE USB
SOCKETS



WE OFFER
IN HOUSE
LASER ETCHING

All white moulded and Mode®
Part M™ wiring accessories are

ANTIMICROBIAL
CERTIFIED PRODUCTS

ANTIMICROBIAL PRODUCTS

Online Ordering

The updated site now incorporates a number of improved features that allow users to access new information directly and easily:

- Ordering 24 hours a day 7 days a week with the ability to check current stock levels as required, meaning you are not restricted to ordering during normal office hours
- Access to on-line catalogues will keep you fully updated with the complete product range and provide information on new products as and when they become available
- The order tracking service keeps you up to date with the progress of your shipment
- Managing your administration paper work is now even easier with instant access to reports and essential documents at a click of a button
- A 'quick buy tab' and the ability to store the most common orders for repeated use, adds to the versatility and flexibility of the revised system.



www.scolmore.com

To Register: E-mail us at sales@scolmore.com or call our Sales Office on 01827 63454 and one of our Sales Representatives will be more than happy to get you on-line.

Scolmore app

Need to set up an account?
Call: 01827 63454 or **Email:** sales@scolmore.com

The new app from Click® Scolmore allows you to use your smart phone to browse our complete range of products, add products to your Favourites or to the Quote Basket. The app then allows you to email the contents of the basket back to yourself providing all the information you need to obtain any quotations.

With over 6000 products currently available you can use the search facility to easily locate the products required and if you require further information there's an option to email us or find us on the map straight from the app.

An added bonus is the app being 100% native means you don't have to be connected to the internet to use it.



Marketing Hub

Need to set up an account?
Call: 01827 63454 **or Email:** sales@scolmore.com

Are you a Click® stockist? If so, you automatically have access to the Marketing Hub. Download all our latest literature, flyers to personalise and our full range of images for use on your website or artwork. Follow the links from www.scolmore.com for more information.



So, why not click and find out how we can help you?

Have you CLICK® ed yet?

Visit www.scolmore.com to see our new website, packed with new features and easier navigation.



www.scolmore.com

Contents...

CLICKsmart — Wiring Accessories for a Smarter Home

Smart Box & App	a15	Receivers	a23
Smart Switches	a17	Smart Wiring Accessories	a27
Smart Touch Controllers	a21	Box Solutions	a38

deco PLUS — Premium Decorative Wiring Accessories

Switches	b10	Control Switches	b26
Back Boxes	b19	Telephone & Data Sockets	b30
Power Socket Outlets	b22	TV & Satellite	b31
Socket & Blank Plates	b24	New Media™ Plates	b33
13A Fused Connection Units	b24	Yokes & Back Boxes	b34

deco — Decorative Metal Wiring Accessories

Switches	c5	Telephone & Data Sockets	c26
Back Boxes	c9	TV & Satellite	c27
Power Socket Outlets	c14	New Media™ Plates	c28
13A Fused Connection Units	c16	Galvanised Boxes	c29
Control Switches	c18	Dry Lining Boxes	c30
Socket & Blank Plates	c23		

define — Decorative Flat Plate Electrical Accessories

Switches	d5	Telephone & Data Sockets	d20
Power Socket Outlets	d11	TV & Satellite	d21
13A Fused Connection Units	d13	New Media™ Plates	d22
Control Switches	d16	Galvanised Boxes	d23
Socket & Blank Plates	d17	Dry Lining Boxes	d24



definity™ Screwless Wiring Accessories

Product Complete Design

Switches	e6
Power Socket Outlets	e12
Fused Connection Units	e14
Control Switches	e20
45A Switches	e18
Socket & Blank Plates	e23
Telephone & Data Sockets	e26
Satellite & Coaxial Outlets	e27
New Media™ Plates	e28

Components Listing

Switches	e30
Switches & Blank Plates	e37
Socket Outlets	e38
Fused Connection Units	e42
Red Fused Connection Units	e46
45A Switches	e47
RJ11 Outlet	e48
UK Telephone Outlet	e49
Satellite & Coaxial Outlets	e50
New Media™ Plates	e52
Galvanised Boxes	e53
Dry Lining Boxes	e54

MODE® Ergonomic Electrical Accessories

Switches	f5
Back Boxes	f9
Power Socket Outlets	f12
13A Fused Connection Units	f16
Control Switches	f17
Ceiling Accessories	f21
Socket & Blank Plates	f22
Telephone & Data Sockets	f24
TV & Satellite	f25
New Media™ Plates	f26
Pattress Boxes	f27
Dry Lining Boxes	f28

Part M Range™ Visually Contrasting Wiring Accessories

Switches	h7
Back Boxes	h10
Power Socket Outlets	h12
Control Switches	h15
Ceiling Accessories	h16
New Media™	h17
Dry Lining Boxes	h20

polar™ A Premium Range of Bright White Accessories

Switches	g5
Back Boxes	g9
Power Socket Outlets	g12
13A Fused Connection Units	g14
Control Switches	g15
Ceiling Accessories	g18
Socket & Blank Plates	g20
Telephone & Data Sockets	g22
TV & Satellite	g23
New Media™ Plates	g24
Pattress Boxes	g25
Dry Lining Boxes	g26

GRIDPRO Interchangeable Plates & Modules

Modules	i26
Dimmer Mounting Kits	i78
Frontplates	i85
Yokes and Back Boxes	i137

Minigrid™ Plates & Modules

Unfurnished Plates	j5	Blank Module	j26
Yokes & Back Boxes	j7	Fused Connection Module	j27
Unfurnished Plates	j9	Flex Outlet Module	j28
1 & 2 Way Switch Modules	j18	1 Way Retractive 'Bell' Switch Module	j29
Intermediate Switch Module	j19	3 Position Switch Modules	j30
2 Way Paddle Switch Module	j20	Fan Isolation Switch Module	j32
2 Way Retractive Switch Module	j21	2 Way Switch Module	j33
DP Switch Module	j22	20A DP Switch Modules	j34
2 Way Key switch Module	j23	Dimmer Module Mounting Kit	j36
DP Key switch 'Emergency Test' Module	j24	2 Way Toggle Switch Modules	j38
DP Key switch Module	j25		

New Media™ Plates & Modules

New Media™ Plates	k5	Typical Sky+ Installation	k24
Unfurnished Plates	k9	Typical Sky+ HD Installtion	k25
New Media™ Modules	k16	Technical Details	k26

Stylish Electrical Essentials

Switches	l5	Telephone & Data Sockets	l14
Socket Outlets	l8	TV & Satellite	l15
13A Fused Connection Units	l9	Pattress Boxes	l16
Control Switches	l10	Dry Lining Boxes	l17
Shaver Socket & Blank Plates	l12		

Essential Products for any Installation

Galvanised Steel Boxes	m4	Adaptors & Extension Sockets	m31
Dry Lining Boxes	m7	Junction & Link Boxes	m32
Studbox®	m10	Socket & Blank Plates	m34
IP66 Weatherproof Accessories	m13	Fused Main Switch	m35
Metal Clad Accessories	m16	Rewireable Plug Tops	m36
Red Accessories	m24	Plug Top Fuses	m37
Floor Accessories	m26	IEC Lock®	m40
Ceiling Accessories	m27		

Simple Connectivity & Control

Lighting Management Box	n4	Flow™ Connectors with Link Cables	n9
Flow™ Connectors	n5	Smart Receivers	n10
Flow Extension Cables	n9	Ceiling Rose	n10

CLICKsmart

Wiring Accessories for a Smarter Home



INTRODUCING
CLICKsmart



Click Smart makes it easier than ever for installers to provide an upgrade to an existing wiring installation.

Smart Switches consist of a Retractive Switch Module and Switch Plate. They are available in five switch types, in multiple finishes and styles from across the Click® Wiring Accessory ranges to offer maximum choice.

The Click Smart controls make it easier to switch and dim wirelessly from preferred locations without the use of switch drops.



CLICKsmart

Click Smart can contribute to significant energy savings by giving you complete control of lighting and small power. This means energy is only consumed when needed which reduces your energy bills and carbon footprint.

The installation of Click Smart is simple & flexible, no additional cables or wall cutting is needed making it ideal for installation within existing or newly constructed buildings. Receivers can be installed behind light fittings or into suitable installation boxes and can be utilised with existing wiring. Existing receivers can also be paired with our universal input switch which converts up to 4 push-button switches.

With Click Smart, you can relocate switches freely when required and switches can be mounted on glass, wood, brick or internal walls etc. Smart Switches are mainly powered by battery, so do not require any wiring or additional power supply.

With Click Smart you have complete control, the range allows portable and remote control up to a distance of 200m. Manual and automatic control and adjustment of lights, on/off or lighting scene creation, as well as controlling shutters, blinds, gates, latches and garage doors.

Click Smart provides peace of mind with its ability to monitor window or door opening and to simulate occupancy when you are away from home. Click Smart operates on the 868MHz frequency band so it provides robust communications.



Contents

New Features a1
Range Overview a8
Typical Installations a10
Smart Box & App a15
Smart Switches a17
Smart Touch Controllers a21
Receivers a23
Smart Wiring Accessories a27
Switching & Dimmer Functions a36
Pairing Sequence a37
Box Solutions a38




New Features

...just got smarter.

Our Click Smart multifunction dimming receiver (RFDEL-71B) overcomes the issue of LED flicker which may occur with existing dimmers. Use the RFDEL-71B with existing wiring by changing the current switch to a retractive or momentary switch...

- 7 programming options
- Never worry about changing the dimmer in the future if the dimmable LED source is changed
- Compatible with the majority of dimmable LED sources available
- Suitable for dimming a single 5W dimmable LED source
- Will dim up to 160W of dimmable LED, halogen and CFL.
- Select between capacitive, LED, resistive and inductive loads.

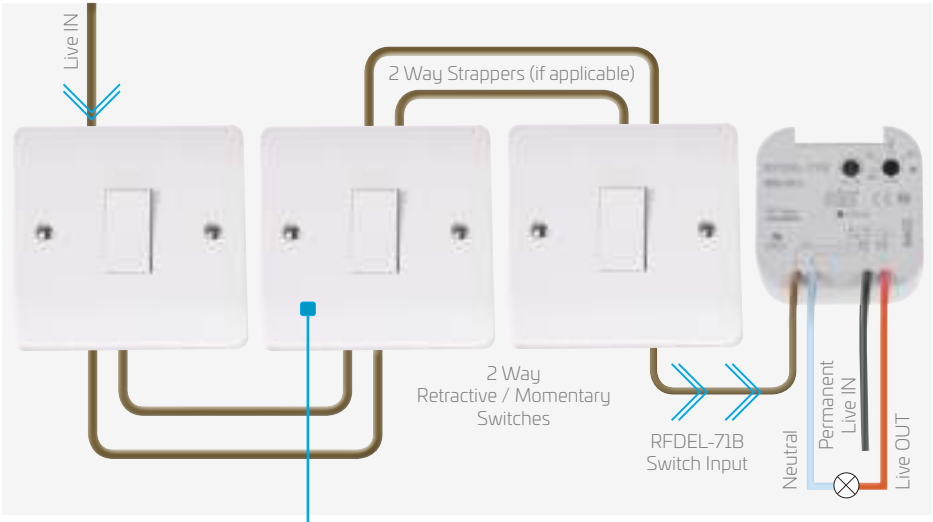



Retractive Switch Control:

Short Press: Turn On / Off

Press & Hold: Dim Up / Down

BASIC

RFWB-20/G RFWB-40/G



2/4 Channel
Smart Switch Controller

RFIM-40B



4 Channel Universal
Smart Switch Adapter

SMART SWITCH



Choice of Plate supplied with 10AX 2
Way Retractive Switch Module

RFMD-100



Smart Compact PIR Sensor
(Indoor use only)

RF KEY



4 Channel Remote Smart
Switch Controller Key Fob

MODERATE

JA-82M



Magnetic Door / Window
Contact (Flush)

JA-83M



Magnetic Door / Window
Contact (Surface)

RFSG-1M



Single Channel Smart Switch
(DIN Rail Mount)

ADVANCED

CSB040



Click® Smart Box

RF Touch



40 Channel Central Touch
Screen Controller

RF Pilot



40 Channel Remote Control

BASIC

RFDEL-71B



Multifunctional
Dimming Receiver
c/w Switch Input

RFSAI-61B



1 Channel Multifunctional
Switching Receiver
c/w Switch Input

RFSC-61



13A Multifunctional
Switching Socket

RFSA-61F



16A 1 Channel Multifunction Switching Receiver
Pre-wired with Flow™ Connector

RFDEL-71F



160Va 1 Channel Multifunction Dimming Receiver
Pre-wired with Flow™ Connector

MODERATE

RFJA-12B/24V



Shutter Receiver
(24V DC)

RFJA-12B/230V



Shutter Receiver
230V AC

RFSA-62B



2 Channel
Switch Receiver

RFSA-61M



1 Channel Multifunctional
Switching Receiver with Antenna

ADVANCED

RFDAC-71B



Dimming Receiver 0(1)-10V
Analogue Output

RFSA-66M




6 Channel Multifunctional
Switch Receiver

RFRP-20/B



Signal Repeater (with
un-switched 13A power outlet)

SECURITY

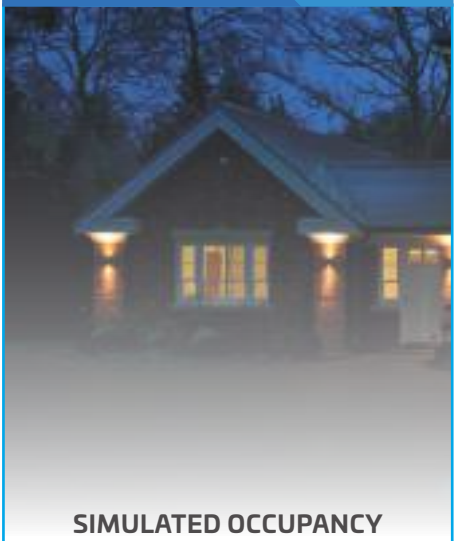

SIMULATED OCCUPANCY

Control of lighting (both internal and external) to create simulated occupancy.

Leave lighting to turn off automatically when you leave for work.

Have lighting, as well as audio devices such as radio's switch on and off during holidays to give your home that lived in appearance.


OUTDOOR LIGHTING

Automatically switch on lights via presence detectors.

Additional switching for multiple use (all the family can have a key fob to put external lights on as they approach the home).

Providing complete control via simple solutions.

ENERGY SAVING

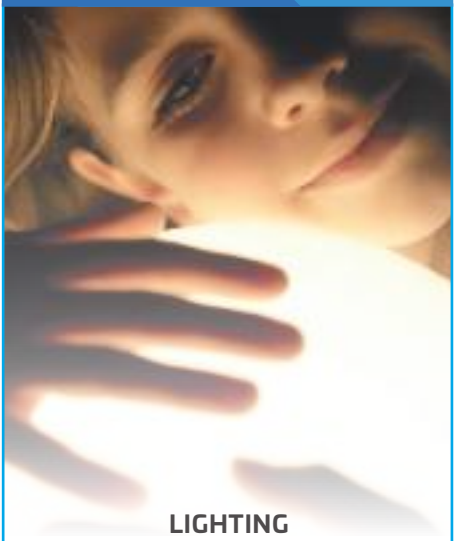

LIGHTING

Automatically turn off lighting and power when you want to. Central programmer enables you to programme lighting and power seven days a week.


Last man out function – not sure if the upstairs lights are still on? Easily remedied by a master switch inside the front door to turn everything off when you leave and back on when you return.

EXTERNAL POWER

Providing switching for external power so that sockets on the outside of buildings are only powered when you want to use them.

Automatically switch on/off Christmas lighting so that it is only on when you want it to be.

COMFORT

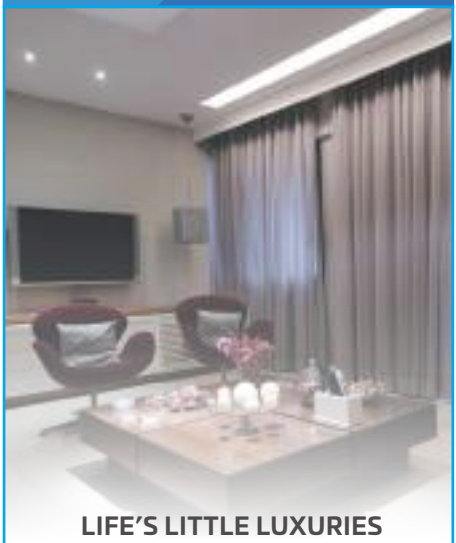

LIFE'S LITTLE LUXURIES

Creating scenes to provide added ambience for any situation around the home.

Control children's rooms to restrict use of TV / gaming etc.

Provide timed access routes to create scenes such as "morning" or "bedtime".

ASSISTED LIVING

Provides flexibility to change an installation to meet changing requirements of the occupier.

Use a bell push to switch a light on for the hard of hearing.

Create a bedtime route that turns all lights on and off to allow the occupier to get to bed without needing to switch lights on/off.

CONTROL



IN THE HOME

Change the use of a room – putting switches where you want them. Ideal for converting a downstairs room into a bedroom.

IN THE OFFICE

Switches can be mounted on any surface – even glass.

IN THE GARDEN

Wireless switching up to 200 metres.

IN BUSINESS

Interacts with building management systems to provide additional control.

COMMUNAL AREAS

Walkway lighting (hotels and commercial properties with interconnecting buildings).

Complete Control **Anywhere...**

Wireless control from **anywhere in the world**, all you need is WI-FI, 3G or 4G on your smart device!

Why Click Smart

Scolmore's range of Click Smart intelligent wiring accessories aims to strip home automation right back to basics, offering a smart solution that has at its core, accessibility and simplicity for the end user.

The Click Smart system makes it easy to adapt and upgrade your home to provide extra security, energy saving, comfort and control.

We have also designed a bespoke Click Smart App which puts the functionality of your home in the palm of your hand.

Designed with simplicity in mind the Smart Box can be utilised within new and existing Click Smart installations. All that's required is a broadband connection. Simply plug the Smart Box into one of the Ethernet ports located usually on the back of your broadband router, download the App and away you go!



Download the app from the Apple App Store or Google Play

CLICKsmart

Group multiple receivers into a scene to help create the perfect ambience for every occasion. You can also create schedules with timed elements bespoke to you, which can be created and activated at times to suit the requirements of the occupants.

For example, your external lights to come on at a pre-set time for added security and reassurance or simulated occupancy when you are away from home.



sales@scolmore.com | 01827 63454 | click-smart.com

Smart Box


The Smart Box itself, connects to the wireless router and a power socket outlet.

All information is stored on the Smart Box. Whether it's a new project or adding control to an existing Click® Smart system the Smart Box enables automation via a phone or tablet for the whole family/team.





CSB040

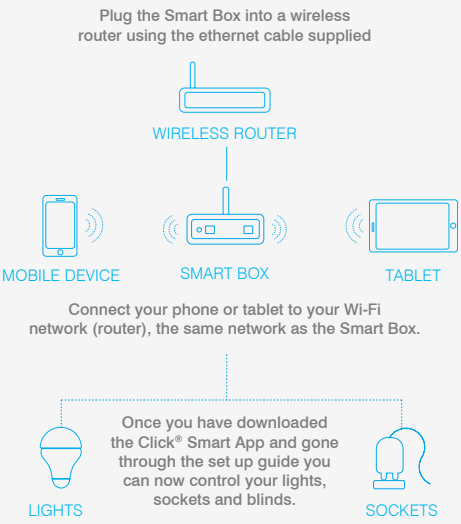

Click® Smart Box

CSB040 Click® Smart Box

Control up to 40 individual receivers, create scenes of up to 20 receivers and control with a single press.

Standards: EN60950-1, ETSI EN 300 220-2 V2.4.1 & ETSI EN 301 489-3 V1.6.1
Dimensions: 90mm x 52mm x 65mm

Smart Switches

- SMART SWITCHES
- KEY FOB
- UNIVERSAL MODULE
- WINDOW DOOR CONTACT
- REMOTE CONTROLLER

Smart Switches are devices used for controlling receivers, they offer a range of solutions that enable the wireless control of receivers from a host of locations.

- Smart Switch plates requiring no back box
- The remote and key fobs allow control from the palm of your hand
- Automated control using PIR or window/door detectors
- The Mains powered Smart Switch requires minimal maintenance
- Create wireless switch plates that match existing accessories





RFWB-20/G



RFWB-40/G



RF KEY/W



RF KEY/B



RFTP001

Smart Switches

RFWB-20/G	2 Channel Wall Smart Switch - White
RFWB-40/G	4 Channel Wall Smart Switch - White

No back box required.
Can be installed using the supplied sticky pads or with screw fixings (not supplied).

Key Fobs

RF KEY/B	4 Button Key Fob Remote - Black
RF KEY/W	4 Button Key Fob Remote - White

UK Switched Socket & Key Fob Test Pack

RFTP001	UK Switched Socket & Key Fob Test Pack

Standards: EN 60669, EN 300220, EN 301489
Dimensions: **RFWB-20/G, RFWB-40/G:** 85mm x 85mm x 16mm **RF KEY:** 64mm x 25mm x 10mm



RFIM-40B



RF PILOT



AN-E



RFSG-1M

Universal Input Smart Switch

RFIM-40B Universal Input Module (Box Mount)

For use with up to 4 x standard retractive switches or 2 x 3 position centre 'Off' retractive switches.

Remote Controller

RF PILOT Pilot Hand Held Controller

Control up to 40 individual receivers or scenes of up to 10 receivers with a single press.

Wired Transmitters

RFSG-1M 230V 1 Channel Universal Smart Switch (DIN Rail Mount)

Can switch 12-230V AC/DC inputs. Transmits a continuous signal with input status ON or OFF. Programs to function 1 of switching receivers.

AN-E External Antenna (3M Cable)

For use with RFSA-61M, RFSA-66M & RFSG-1M.

Standards: EN 60669, EN 300220, EN 301489
Battery Type: RFIM-40B: CR2032 (x2), **RF PILOT:** AAA (x2)
Cable Length: RFIM-40B: 90mm
Dimensions: RFSG-1M: 90mm x 17.5mm x 64mm, **RF PILOT:** 41mm x 130mm x 18mm **RFIM-40B:** 49mm x 49mm x 13mm



JA-82M



JA-83M



RFMD-100



RFRP-20/B

Window Door Contact

JA-82M	Flush Magnetic Door/Window Contact
JA-83M	Surface Magnetic Door/Window Surface Contact

PIR Sensor

RFMD-100	Compact Indoor PIR Sensor

Signal Repeater

RFRP-20/B	Plug-in Signal Repeater With 13A Socket (with un-switched 13A power outlet) Extends the range up to 200m for up to 20 Smart Switches.

Standards: EN 50130-4, EN 55022, EN 60950, EN 60669, EN 300220, EN 301489 **RFRP-20/B:** EN 60730 / BS1363
Battery Type: JA-82M: CR 2354 (x2), **JA-83M:** CR 123A (x1), **RFMD-100:** AA (x2)
Dimensions: JA-82M: 25mm x 192mm x 9mm, **JA-83M (Main):** 31mm x 75mm x 23mm,**JA-83M (Magnet)** 16mm x 56mm x 15mm
RFMD100: 46mm x 105mm x 43mm, **RFRP-20/B:** 60mm x 120mm x 80mm

CLICKsmart

Smart Touch Controllers

The Smart Touch Controller both transmits and receives signals within the smart system. This allows the status to be observed and over-ridden if necessary.

Automated control can also be added for when the property is occupied, (one set of times) and to simulate occupancy e.g. holiday mode (second set of times).





RFT-WBK (RF Touch Black)



RFT-WWH (RF Touch White)

RF Touch Screen Controllers

RFT-WBK	Smart Touch Screen - Black
RFT-WWH	Smart Touch Screen - White

Smart Touch Controller supplied with DC Adaptor.
Can be hard wired into the rear of the unit via 230V supply.

Control up to 40 individual receivers or scenes of up to 20 receivers with a single press.

Standards: EN 60730
Dimensions: 94mm x 94mm x 24mm

CLICKsmart

Receivers

- SHUTTER RECEIVERS
- DIMMING RECEIVERS
- SWITCHING RECEIVERS
- ANALOGUE RECEIVERS

Receivers are available in four categories - switching receivers, dimming receivers and shutter receivers.





RFSAI-61B



RFSA-62B



RFJA-12B/230V



RFJA-12B/24V



RFSA-61M



AN-E



RFSA-66M



RFSC-61

Single Channel Receivers

RFSAI-61B 16A Switching Receiver c/w Control Input

Can utilise retractive switches in conjunction with the 3V DC switch input

RFSA-61M 16A 1 channel Switching Receiver (DIN Rail Mount)

(Volt free contact, normally open, normally closed)

RFSC-61 13A Plug-in Switching Socket

AN-E External Antenna (3M Cable)

For use with RFSA-61M, RFSA-66M & RFSG-1M

Multi Channel Receivers

RFSA-62B 8A 2 Channel Switching Receiver (Box Mount)

(230V~ live input supplies both live outputs)

RFSA-66M 8A 6 Channel Switching Receiver (DIN Rail Mount)

(volt free contacts, 3 x normally open with 3 x normally open, normally closed)

Shutter Receivers

RFJA-12B/24V 12-24V DC Shutter Receiver

RFJA-12B/230V 230V Shutter Receiver

Standards: EN 60669, EN 300220, EN 301489, **RFSC-61:** BS1363 **Relay Current Ratings:** AC1
Cable Length: RFSAI-61B, RFSA-62B, RFJA-12B/230V, RFJA-12B/24V: 90mm
Dimensions: RFSAI-61B: 49mm x 49mm x 21mm, **RFSC-61:** 60mm x 120mm x 80mm **RFSA-61M:** 90mm x 17.5mm x 64mm, **RFJA-12B/230V, RFSA-62B:** 49mm x 49mm x 21mm, **RFJA-12B/24V:** 49mm x 49mm x 13mm, **RFJA-12B/24V:** 90mm x 52mm x 65mm



RFDEL-71B



RFDA-71B



RFDAC-71B



RFSA-61F flow™



RFDEL-71F flow™

Receivers

RFDEL-71B 160Va LED Dimming Receiver c/w Control Input

Offers leading and trailing edge technology with trim facility. Compatible with most dimmable LED light sources. Can utilise retractive switches in conjunction with the 230V~ switch input.

RFDA-71B 250W Resistive/Inductive Dimming Receiver

RFDAC-71B 0(1)-10V Analogue Dimming Receiver

0(1)-10V 1 Channel Multifunction Dimming Receiver. Complete with 230V~ 16A ON/OFF Switch Control

Receivers

RFSA-61F 16A Switching Receiver (Flow™ Enclosure)

RFDEL-71F 160Va LED Dimming Receiver (Flow™ Enclosure)

Offers leading and trailing edge technology with trim facility. Compatible with most dimmable LED light sources.

Standards: EN 60669, EN 300220, EN 301489
Cable Length: **RFDEL-71B, RFDAC-71B, RFDA-71B:** 90mm
Dimensions: **RFDEL-71B, RFDAC-71B, RFDA-71B:** 49mm x 49mm x 21mm, **RFSA-61F, RFDEL-71F:** 260mm x 52mm x 25mm

CLICKsmart

From our family to yours...



Join our Smart family at click-smart.com to learn more about how Click Smart can upgrade your home and make your own lifestyle smarter.

In a series of entertaining, easy to follow videos our family demonstrate how the Click Smart range can eliminate the everyday annoyances and enhance your home environment.

click-smart.com

CLICKsmart

Smart Wiring Accessories

Our Click® wiring accessory ranges are compatible with Click Smart. The switching and dimming receivers (RFSAI-61B and RFDEL-71B) can be utilised with our momentary press switches (MD004). This allows the smart wiring accessories to be used with existing wiring to complement your installation. We have now put these components together as a simple smart code for your convenience...





Explanation of a Smart Switch code:

VP	CH	BK	-	SMART1
Plate Style	Product Finish	Insert Colour		Product Number



MD004 x 1

DPABBK-SMART1



MD004 x 2

DPBNBK-SMART2



MD004 x 3

DPCHWH-SMART3



MD004 x 4

DPSBBK-SMART4



MD004 x 6

DPSBBK-SMART6

Deco Plus™ plates are manufactured from stainless steel.
Please note Antique Brass and Black Nickel are only available with black inserts.

Smart Switches

DPBK-SMART1**	1G Plate 1 Aperture Supplied with 1 x 10AX 2 Way Ingot Retractive Switch Module - Black
DPWH-SMART1**	1G Plate 1 Aperture Supplied with 1 x 10AX 2 Way Ingot Retractive Switch Module - White
DPBK-SMART2**	1G Plate 2 Apertures Supplied with 2 x 10AX 2 Way Ingot Retractive Switch Modules - Black
DPWH-SMART2**	1G Plate 2 Apertures Supplied with 2 x 10AX 2 Way Ingot Retractive Switch Modules - White
DPBK-SMART3**	1G Plate 3 Apertures Supplied with 3 x 10AX 2 Way Ingot Retractive Switch Modules - Black
DPWH-SMART3**	1G Plate 3 Apertures Supplied with 3 x 10AX 2 Way Ingot Retractive Switch Modules - White
DPBK-SMART4**	2G Plate 2 x 2 Apertures Supplied with 4 x 10AX 2 Way Ingot Retractive Switch Modules - Black
DPWH-SMART4**	2G Plate 2 x 2 Apertures Supplied with 4 x 10AX 2 Way Ingot Retractive Switch Modules - White
DPBK-SMART6**	2G Plate 2 x 3 Apertures Supplied with 6 x 10AX 2 Way Ingot Retractive Switch Modules - Black
DPWH-SMART6**	2G Plate 2 x 3 Apertures Supplied with 6 x 10AX 2 Way Ingot Retractive Switch Modules - White

Standards: MD004: BS EN 60669
Back Box Depth: 16mm Min. when hardwired or 35mm Min. with RFIM-40B **Cable Size:** 4 x 1.5mm² / 2 x 2.5mm²
Dimensions: 1 Gang: 88mm x 88mm x 8mm **2 Gang:** 148mm x 88mm x 8mm

Understanding the code:

DP - Plate Style **BN** - Plate Finish **BK** - Insert Colour **SMART1** - Product No.
AB Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome, **BN** Black Nickel, **SS** Stainless Steel.



VPABBK-SMART1



VPBNBK-SMART2



VPCHWH-SMART3



VPSCBK-SMART4



VPSBBK-SMART6

deco™

Deco™ plates are manufactured from stainless steel.
Please note Antique Brass and Black Nickel are only available with black inserts.

Smart Switches

VP**BK-SMART1	1G Plate 1 Aperture Supplied with 1 x 10AX 2 Way Ingot Retractive Switch Module - Black
VP**WH-SMART1	1G Plate 1 Aperture Supplied with 1 x 10AX 2 Way Ingot Retractive Switch Module - White
VP**BK-SMART2	1G Plate 2 Apertures Supplied with 2 x 10AX 2 Way Ingot Retractive Switch Modules - Black
VP**WH-SMART2	1G Plate 2 Apertures Supplied with 2 x 10AX 2 Way Ingot Retractive Switch Modules - White
VP**BK-SMART3	1G Plate 3 Apertures Supplied with 3 x 10AX 2 Way Ingot Retractive Switch Modules - Black
VP**WH-SMART3	1G Plate 3 Apertures Supplied with 3 x 10AX 2 Way Ingot Retractive Switch Modules - White
VP**BK-SMART4	2G Plate 2 x 2 Apertures Supplied with 4 x 10AX 2 Way Ingot Retractive Switch Modules - Black
VP**WH-SMART4	2G Plate 2 x 2 Apertures Supplied with 4 x 10AX 2 Way Ingot Retractive Switch Modules - White
VP**BK-SMART6	2G Plate 2 x 3 Apertures Supplied with 6 x 10AX 2 Way Ingot Retractive Switch Modules - Black
VP**WH-SMART6	2G Plate 2 x 3 Apertures Supplied with 6 x 10AX 2 Way Ingot Retractive Switch Modules - White

Replace ** with desired finish, listed below.

Standards: MD004: BS EN 60669
Back Box Depth: 16mm Min. when hardwired or 35mm Min. with RFIM-40B **Cable Size:** 4 x 1.5mm² / 2 x 2.5mm²
Dimensions: 1 Gang 88mm x 88mm x 8mm, **2 Gang** 146mm x 88mm x 8mm

Understanding the code:

VP - Plate Style **BN** - Plate Finish **BK** - Insert Colour **SMART1** - Product No.
AB Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome, **BN** Black Nickel, **SS** Stainless Steel.



FPCHBK-SMART1



FPPNBK-SMART2



FPBNBK-SMART3



FPBSBK-SMART4



FPPNWH-SMART6

Define® plates are coated stainless steel.

define®

Smart Switches

FPBK-SMART1**	1G Plate 1 Aperture Supplied with 1 x 10AX 2 Way Ingot Retractive Switch Module - Black
FPWH-SMART1**	1G Plate 1 Aperture Supplied with 1 x 10AX 2 Way Ingot Retractive Switch Module - White
FPBK-SMART2**	1G Plate 2 Apertures Supplied with 2 x 10AX 2 Way Ingot Retractive Switch Modules - Black
FPWH-SMART2**	1G Plate 2 Apertures Supplied with 2 x 10AX 2 Way Ingot Retractive Switch Modules - White
FPBK-SMART3**	1G Plate 3 Apertures Supplied with 3 x 10AX 2 Way Ingot Retractive Switch Modules - Black
FPWH-SMART3**	1G Plate 3 Apertures Supplied with 3 x 10AX 2 Way Ingot Retractive Switch Modules - White
FPBK-SMART4**	2G Plate 2 x 2 Apertures Supplied with 4 x 10AX 2 Way Ingot Retractive Switch Modules - Black
FPWH-SMART4**	2G Plate 2 x 2 Apertures Supplied with 4 x 10AX 2 Way Ingot Retractive Switch Modules - White
FPBK-SMART6**	2G Plate 2 x 3 Apertures Supplied with 6 x 10AX 2 Way Ingot Retractive Switch Modules - Black
FPWH-SMART6**	2G Plate 2 x 3 Apertures Supplied with 6 x 10AX 2 Way Ingot Retractive Switch Modules - White

Replace ****** with desired finish, listed below.

Standards: MD004: BS EN 60669
Back Box Depth: 25mm Min. when hardwired or 47mm Min. with RFIM-40B **Cable Size:** 4 x 1.5mm² / 2 x 2.5mm²
Dimensions: 1 Gang 88mm x 88mm x 1.3mm*, **2 Gang** 146mm x 88mm x 1.3mm* (*Excluding gasket)

Understanding the code:


FP - Plate Style **BN** - Plate Finish **BK** - Insert Colour **SMART1** - Product No.
BS Brushed Steel, **BN** Black Nickel, **PN** Pearl Nickel, **CH** Polished Chrome, **SS** Stainless Steel.



SINSSBK-SMART1



SINCHPW-SMART2



SINBSBK-SMART3



SINCHPW-SMART4



SINBSBK-SMART6

definity™

Please see overleaf for Smart Switch cover plates.

Smart Switches


SINBK-SMART1**	1G Insert 1 Aperture Supplied with 1 x 10AX 2 Way Ingot Retractive Switch Module - Black
SINPW-SMART1**	1G Insert 1 Aperture Supplied with 1 x 10AX 2 Way Ingot Retractive Switch Module - White
SINBK-SMART2**	1G Insert 2 Apertures Supplied with 2 x 10AX 2 Way Ingot Retractive Switch Modules - Black
SINPW-SMART2**	1G Insert 2 Apertures Supplied with 2 x 10AX 2 Way Ingot Retractive Switch Modules - White
SINBK-SMART3**	1G Insert 3 Apertures Supplied with 3 x 10AX 2 Way Ingot Retractive Switch Modules - Black
SINPW-SMART3**	1G Insert 3 Apertures Supplied with 3 x 10AX 2 Way Ingot Retractive Switch Modules - White
SINBK-SMART4**	2G Insert 2 x 2 Apertures Supplied with 4 x 10AX 2 Way Ingot Retractive Switch Modules - Black
SINPW-SMART4**	2G Insert 2 x 2 Apertures Supplied with 4 x 10AX 2 Way Ingot Retractive Switch Modules - White
SINBK-SMART6**	2G Insert 2 x 3 Apertures Supplied with 6 x 10AX 2 Way Ingot Retractive Switch Modules - Black
SINPW-SMART6**	2G Insert 2 x 3 Apertures Supplied with 6 x 10AX 2 Way Ingot Retractive Switch Modules - White

Replace ** with desired finish, listed below.

Standards: MD004: BS EN 60669
Back Box Depth: 25mm Min. when hardwired or 47mm Min. with RFIM-40B **Cable Size:** 4 x 1.5mm² / 2 x 2.5mm²
Dimensions: 1 Gang 86mm x 86mm x 4mm, **2 Gang** 146mm x 86mm x 4mm

Understanding the code:


SIN - Insert Prefix **SS** - 'INGOT' Switch Finish (if applicable) **BK** - Insert Colour **SMART1** - Product No.
BS Brushed Steel, **CH** Polished Chrome, **SS** Stainless Steel.



SINBK-SMART1



SINPW-SMART2



SINBK-SMART3



SINPW-SMART4



SINBK-SMART6

Please see overleaf for Smart Switch cover plates.

definity™

Smart Switches

SINBK-SMART1	1G Insert 1 Aperture Supplied With 1 x 10AX 2 Way Retractive Switch Module - Black
SINPW-SMART1	1G Insert 1 Aperture Supplied With 1 x 10AX 2 Way Retractive Switch Module - White
SINBK-SMART2	1G Insert 2 Apertures Supplied With 2 x 10AX 2 Way Retractive Switch Modules - Black
SINPW-SMART2	1G Insert 2 Apertures Supplied With 2 x 10AX 2 Way Retractive Switch Modules - White
SINBK-SMART3	1G Insert 3 Apertures Supplied With 3 x 10AX 2 Way Retractive Switch Modules - Black
SINPW-SMART3	1G Insert 3 Apertures Supplied With 3 x 10AX 2 Way Retractive Switch Modules - White
SINBK-SMART4	2G Insert 2 x 2 Apertures Supplied With 4 x 10AX 2 Way Retractive Switch Modules - Black
SINPW-SMART4	2G Insert 2 x 2 Apertures Supplied With 4 x 10AX 2 Way Retractive Switch Modules - White
SINBK-SMART6	2G Insert 2 x 3 Apertures Supplied With 6 x 10AX 2 Way Retractive Switch Modules - Black
SINPW-SMART6	2G Insert 2 x 3 Apertures Supplied With 6 x 10AX 2 Way Retractive Switch Modules - White

Standards: MD004: BS EN 60669
Back Box Depth: 25mm Min. when hardwired or 47mm Min. with RFIM-40B **Cable Size:** 4 x 1.5mm² / 2 x 2.5mm²
Dimensions: 1 Gang 86mm x 86mm x 4mm, **2 Gang** 146mm x 86mm x 4mm



SCP401
SMART1 Cover Plate



SCP402
SMART2 Cover Plate



SCP403
SMART3 Cover Plate



SCP404
SMART4 Cover Plate



SCP406
SMART6 Cover Plate

definity™

Definity™ plates are coated stainless steel

Unfurnished Smart Switch Plates

SCP401**	1 Gang Plate Single Aperture for SMART1
SCP402**	1 Gang Plate Twin Aperture for SMART2
SCP403**	1 Gang Plate Triple Aperture for SMART3
SCP404**	2 Gang Plate (2+2) Aperture for SMART4
SCP406**	2 Gang Plate (3+3) Aperture for SMART6

Replace ** with desired finish, listed below.

Dimensions: 1 Gang: 88mm x 88mm x 8mm **2 Gang:** 146mm x 88mm x 8mm

Understanding the code:

SCP - Definity Cover Plate Prefix **401** - Product No **SS** - Plate Colour.
BS Brushed Steel, **CH** Polished Chrome, **SS** Stainless Steel. **PW** White and **BK** Black are also available (produced from polycarbonate).



CMA-SMART1



CMA-SMART2



CMA-SMART3



CMA-SMART4



CMA-SMART6

MODE®

Smart Switches

CMA-SMART1	1 Gang Plate 1 Aperture Supplied With 1 x 10AX 2 Way Retractive Switch Module - White
CMA-SMART2	1 Gang Plate 2 Apertures Supplied With 2 x 10AX 2 Way Retractive Switch Modules - White
CMA-SMART3	1 Gang Plate 3 Apertures Supplied With 3 x 10AX 2 Way Retractive Switch Modules - White
CMA-SMART4	2 Gang Plate 2 x 2 Apertures Supplied With 4 x 10AX 2 Way Retractive Switch Modules - White
CMA-SMART6	2 Gang Plate 2 x 3 Apertures Supplied With 6 x 10AX 2 Way Retractive Switch Modules - White

Standards: MD004: BS EN 60669
Back Box Depth: 16mm Min. when hardwired or 35mm Min. with RFIM-40B **Cable Size:** 4 x 1.5mm² / 2 x 2.5mm²
Dimensions: 1 Gang 86mm x 86mm x 9.5mm, **2 Gang** 146mm x 86mm x 9.5mm




PRW-SMART1



PRW-SMART2



PRW-SMART3

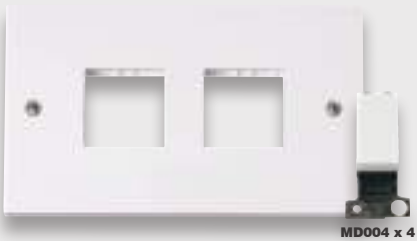

PRW-SMART4



PRW-SMART6

polar™

Smart Switches

PRW-SMART1	1 Gang Plate 1 Aperture Supplied With 1 x 10AX 2 Way Retractive Switch Module - White
PRW-SMART2	1 Gang Plate 2 Apertures Supplied With 2 x 10AX 2 Way Retractive Switch Modules - White
PRW-SMART3	1 Gang Plate 3 Apertures Supplied With 3 x 10AX 2 Way Retractive Switch Modules - White
PRW-SMART4	2 Gang Plate 2 x 2 Apertures Supplied With 4 x 10AX 2 Way Retractive Switch Modules - White
PRW-SMART6	2 Gang Plate 2 x 3 Apertures Supplied With 6 x 10AX 2 Way Retractive Switch Modules - White

Standards: MD004: BS EN 60669
Back Box Depth: 16mm Min. when hardwired or 35mm Min. with RFIM-40B **Cable Size:** 4 x 1.5mm² / 2 x 2.5mm²
Dimensions: 1 Gang 86mm x 86mm x 11mm, **2 Gang** 146mm x 86mm x 11mm



CL-SMART1



CL-SMART2



CL-SMART3



CL-SMART4



CL-SMART6

Metal Clad plates are electrophoretically coated stainless steel.

essentials™

Smart Switches

CL-SMART1	1 Gang Plate 1 Aperture Supplied With 1 x 10AX 2 Way Retractive Switch Module - White
CL-SMART2	1 Gang Plate 2 Apertures Supplied With 2 x 10AX 2 Way Retractive Switch Modules - White
CL-SMART3	1 Gang Plate 3 Apertures Supplied With 3 x 10AX 2 Way Retractive Switch Modules - White
CL-SMART4	2 Gang Plate 2 x 2 Apertures Supplied With 4 x 10AX 2 Way Retractive Switch Modules - White
CL-SMART6	2 Gang Plate 2 x 3 Apertures Supplied With 6 x 10AX 2 Way Retractive Switch Modules - White

Standards: MD004: BS EN 60669
Back Box Depth: 40mm **Cable Size:** 4 x 1.5mm² / 2 x 2.5mm²
Dimensions: 1 Gang 80mm x 80mm, **2 Gang** 146mm x 80mm, **Knock-outs:** 20mm

Switching functions

Function 1	Press button	Press for ON, release for OFF
Function 2	'On' button	Press for ON
Function 3	'Off' button	Press for OFF
Function 4	On/Off button	Press for ON, press again for OFF
Function 5	'Off' delay	Press for ON, device will turn off after pre-determined time period as set in step 3 of programming (2 secs - 60 mins max)
Function 6	'On' delay	Press to start timer. 'On' delay will be as pre-determined in step 3 of programming (2 secs - 60mins)

Dimmer functions

		Press button & release	Press button & hold
Function 1	Scene recall / OFF	Press to recall scene, press to turn OFF	Press button for more than 1 second to set scene brightness
Function 2	Scene recall / OFF - anti-tamper	Press to recall scene, press again to turn OFF	Press button for more than 3 seconds to set scene brightness (avoids accidental scene setting)
Function 3	Scene recall - fade ON / fade OFF - push to recall scene	Press to recall scene	Press button for more than 1 second to set scene brightness
Function 4	Scene recall / fade OFF	Press to recall scene	Press button for more than 1 second to set scene brightness
Function 5	Variable fade up to Max. (user definable)	Press to start fade up time to maximum brightness (2 secs - 30mins)	N/A
Function 6	Variable fade down to OFF. (user definable)	Press to start, fade down to OFF (2 secs - 30mins)	N/A
Function 7	ON/OFF	Press once for ON, press again for OFF	N/A

Load types

R - RESISTIVE



L - INDUCTIVE



C - CAPACITIVE



STEP 1 - Activate

Press & hold the 'programming' button on the receiver for 2 seconds (the status LED will flash with a 1 second interval).

PROGRAMMING BUTTON

Press and hold for 2 seconds




STATUS LED WILL FLASH PER SECOND

STEP 2 - Select function

To assign the chosen switch device button & function, press the required button the number of times to match the function number required at one second intervals. SEE TABLE 1 on opposite page (e.g for switch function 2, press the button 2 times).

FUNCTION BUTTON

Press the number of times that corresponds to the desired function



Step 3 - Only for function 5 & 6 for all other functions go to step 4

To set the time element, press & hold the 'programming' button again for >5 seconds (the status LED will flash twice in a 1 second interval). THE TIMER HAS NOW STARTED. When the required time period has elapsed, press the previously assigned switch button (IN STEP 2)once to confirm.

PROGRAMMING BUTTON

Press and hold for more than 5 seconds



STATUS LED WILL FLASH TWICE PER SECOND

STEP 4 - Save and exit

To exit programming mode press the 'programming' button for 1 second only.

PROGRAMMING BUTTON

Press and hold for 1 second



Delete a single function

STAGE 1

PROGRAMMING BUTTON

Press and hold for 5 seconds




STATUS LED WILL FLASH TWICE PER SECOND

STAGE 2

FUNCTION BUTTON

Press the button that corresponds the desired function to delete



Delete all stored functions

PROGRAMMING BUTTON

Press and hold 8 seconds - this will delete all stored functions. Release programming button and then press for 1 second to exit



Everything you need in one box

CLICKsmart

Solutions to make your home smarter...



Solution 1 - Switch supply to permanent conversion pack.

CODE: CMA-SLCONV



There is a growing requirement to install wired smoke detectors in residential properties.



A lighting circuit with a switched live will not always have a permanent feed at the light fitting.



This can be a problem when adding another device which requires a permanent live feed.



Resulting in hours of labour and ruining the decoration of the room by running an addition cable.



With just three Click® Smart products you can cut the labour time, mess and costs in half.



Replace the switch with a retractive switch & wire the RFSA-61B & RFIM-40B to the retractive switch & light.

Solution 2 - Fix flickering rotary dimmers by using a retractive switch instead of a rotary dimmer (wired).

CODE: CMA-SDIM1



When you switch on one of your lights with a rotary dimmer do you experience continuous flickering?



Even when the lights on, the flickering has continued.



Dealing with constant flickering can be very frustrating for you.



Make your home smarter with the RFDEL-71B and a retractive switch.



Replace the wired rotary dimmer with the retractive switch and add the RFDEL-71B to the light fitting.



This will now stop any flickering that may have occurred.

Solution 3 - Add a wireless switch with an outdoor socket.

CODE: OA1636AG



There's always something to do around the house, no matter what time it is.



It's sometimes difficult to see in the dark & you never know what you are walking into.



Make your home smarter with the Click® Smart RFWB-20G & RFSAI-61B.



Simply add the RFSAI-61B to the socket you wish to control.



And then add the RFWB-20/G switch to the convenient place.



By adding a smart switch you can now control anything plugged into the socket.



RFDEL-71B



CMA401



MD004PW

- Compatible with traditional wiring, by simply changing the switch to a momentary press or retractive switch as supplied in the box
- Achieve multiple way dimming, unachievable with traditional rotary dimmers. Simply add more retractive switches where required.
- Retrofit to existing circuit.
- Dims up to 160W of dimmable LED
- Never have to worry about changing the dimmer if the LED light source is changed.


Dimmer Switch

CMA-SDIM1 Smart Mode LED Dimmer 160W

Standards: MD004PW: BS EN 60669 **RFDEL-71B:** EN 60669, EN 300220, EN 301489
Back Box Depth: MD004PW: 16mm Minimum **Cable Size: MD004PW:** 4 x 1.5mm² / 2 x 2.5mm² / 1 x 6mm² Maximum
Cable Length: RFDEL-71B: 90mm **Dimensions: CMA401:** (86mm x 86mm x 9.5mm) **RFDEL-71B:** 49mm x 49mm x 21mm



OA036AG



RFWB-20/G



RFSAI-61B

- Ideal for switching outdoor lighting
- Prevent unauthorized use of outdoor socket with ability to isolate the sockets
- RFSAI-61B allows wireless control of your socket
- Install the RFWB/20G in a convenient place using wireless technology.

Outdoor Socket

OA1636AG Smart 2 Gang Outdoor Socket & Switch

Standards: RFWB-20/G:EN 60669, EN 300220, EN 301489 **OA036AG:** BS EN 60529 (Enclosure), BS 1363 (Socket) **RFSAI-61B:** EN 60669, EN 300220, EN 301489 **Battery Type: RFWB-20/G:**CR2032 x 1 **Knock-outs: OA036AG:** 20mm
Relay Current Ratings: RFSAI-61B: AC1 **Cable Length: RFSAI-61B:** 90mm **Cable Size: OA036AG:** 4 x 2.5mm²
Dimensions: OA036AG: From Front: 158mm (Height) x 158mm (Width) x 90mm (Depth - with Gasket)
From Rear: 130mm (Height) x 165mm (Width) **RFSAI-61B:** 49mm x 49mm x 21mm **RFWB-20/G:** 85mm x 85mm x 16mm



RFSAI-61B



RFIM-40B



CMA401



MD004PW

- Retro fit solution to convert a switched live into a permanent feed.
- Allows independent control of the lighting circuit, whilst, for example, still supplying a smoke detector with constant power.

Converter Pack

CMA-SLCONV Smart Switch Supply to Perm Converter Pack

Standards: MD004PW: BS EN 60669 **RFSAI-61B, RFIM-40B:** EN 60669, EN 300220, EN 301489
Battery Type: RFIM-40B: CR2032 (x2) **Back Box Depth: RFIM-40B:** behind switch 35mm Min.
Cable Size: MD004PW: 4 x 1.5mm² / 2 x 2.5mm² / 1 x 6mm² Maximum **Cable Length: RFSAI-61B RFIM-40B:** 90mm
Dimensions: CMA401: (86mm x 86mm x 9.5mm) **RFSAI-61B:** 49mm x 49mm x 21mm **RFIM-40B:** 49mm x 49mm x 13mm

deco PLUS

Premium Decorative Wiring Accessories





deco PLUS®

Premium Decorative Wiring Accessories

Contents

New Features	**b7**
Switches	**b10**
Back Boxes	**b19**
Power Socket Outlets	**b22**
Socket & Blank Plates	**b24**
13A Fused Connection Units	**b24**
Control Switches	**b26**
Telephone & Data Sockets	**b30**
TV & Satellite	**b31**
New Media™ Plates	**b33**
Yokes & Back Boxes	**b34**

A comprehensive range of premium decorative metal wiring accessories is now available under the Deco Plus® brand. A brand that is synonymous with high specification, exceptional quality and unprecedented value.

The smooth contemporary curves of the Deco Plus® range are available in seven finishes to complement any room.

Each product is supplied individually packaged in its own distinctive printed box complete with full fitting instructions.

Deco Plus® switches feature the same modular switch design as our moulded ranges. All of the switch modules featured in our Minigrid™ brochure can therefore be used in any combination on Deco Plus® accessories.

All Deco Plus® 13A sockets and fused connection units are tested and approved to BS1363 offering assured quality and safety.



Deco® Plus unique product codes

When ordering any Deco Plus® products, please specify the required finish by following the simple code structure as demonstrated here...

DP	BN	536	BK
Plate Style	Product Finish	Product Number	Insert Colour

All Deco Plus® products featured in the pages of this brochure are available in seven distinctive quality finishes. *UK Design Registration 3015621.

All Deco Plus® products are available with black or white inserts, excluding antique brass and black nickel finishes, which are supplied with black insert and gasket only.



Antique Brass* (AB)



Satin Brass* (SB)



Satin Chrome* (SC)



Polished Brass (BR)



Black Nickel (BN)



Stainless Steel (SS)



Polished Chrome (CH)


ahead of the **curve**


deco
PLUS



New Features


...plus so much more

Attention to detail has been at the forefront of the design process for our newest range of wiring accessories. All aspects, no matter how small, have been taken into account and collectively create the elegant style that characterises Deco Plus®.





Every accessory within the range which contains a neon now has an insert surrounding the lens of the neon.



An attractive feature added to the Deco Plus® range is the profile of the cooker sockets. Instead of the traditional T-bar shape, our new range matches the profile of our ingot sockets.



Switches

- MODULAR INGOT PLATE SWITCHES
- TOGGLE SWITCHES
- DIMMER SWITCHES

All Deco Plus® switches are supplied complete with requisite switch module(s). However, should local conditions dictate, the installer may customise a switch arrangement by substituting switch modules by means of a simple, single fixing screw.

A comprehensive range of available modules is illustrated in our dedicated Minigrid™ brochure.

Unfurnished mounting plates can be ordered separately and furnished with whatever selection of switch modules may be required.



MINIGRID®

Please see page j18 for a selection of Minigrid™ modules.



All Deco Plus® switch plates are modular as standard, allowing you to create virtually any switch plate you require.



411



412



413



425



414



416

MINIGRID® For interchangeable Minigrid™ Modules please see page j18.

Ingot Plates Switches - MiniGrid™

411	10AX Ingot 1 Gang 2 Way Plate Switch	**414**	10AX Ingot 4 Gang 2 Way Plate Switch
412	10AX Ingot 2 Gang 2 Way Plate Switch	**416**	10AX Ingot 6 Gang 2 Way Plate Switch
413	10AX Ingot 3 Gang 2 Way Plate Switch	**425**	10AX Ingot 1 Gang Intermediate Plate Switch

Standards: BS EN 60669 **Back Box Depth:** 16mm Minimum
Cable Size: 4 x 1.5mm² / 2 x 2.5mm² / 1 x 6mm² Maximum
Dimensions: **1 Gang:** 88mm x 88mm x 8mm, **2 Gang:** 148mm x 88mm x 8mm

Understanding the code:
DP - Plate Style **BN** - Plate Finish **536** - Product No. **BK** - Insert Colour Please note: AB & BN are only available with black inserts.
AB Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome, **BN** Black Nickel, **SS** Stainless Steel.



401



402




471



472



403

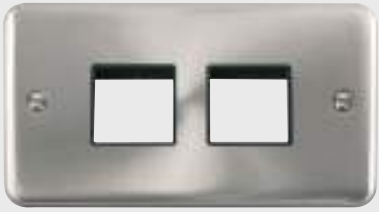

404



406



426

MINIGRID® For interchangeable Minigrid™ Modules please see page j18.
For the complete range of Minigrid™ modules please see our dedicated Minigrid™ section.

Unfurnished Plates - MiniGrid™

401 1 Gang MiniGrid™ Unfurnished Plate - 1 Aperture
402 1 Gang MiniGrid™ Unfurnished Plate - 2 Apertures
403 1 Gang MiniGrid™ Unfurnished Plate - 3 Apertures
404 2 Gang MiniGrid™ Unfurnished Plate - 2 x 2 Apertures
406 2 Gang MiniGrid™ Unfurnished Plate - 2 x 3 Apertures
426 2 Gang MiniGrid™ Unfurnished Plate - 6 In-Line Apertures

Architrave Unfurnished Plates - MiniGrid™

471 1 Gang MiniGrid™ Unfurnished Architrave Plate - 1 Aperture
472 2 Gang MiniGrid™ Unfurnished Architrave Plate - 2 Apertures

These plates must be used with the architrave back boxes WA671 / WA672 and can only be flush mounted.

Back Box Depth: Dependant on modules used
Dimensions: 1 Gang: 88mm x 88mm x 8mm, **2 Gang:** 148mm x 88mm x 8mm,
Single architrave: 35mm x 88mm x 8mm **Twin architrave:** 35mm x 150mm x 8mm

Understanding the code:
DP - Plate Style **BN** - Plate Finish **536** - Product No. **BK** - Insert Colour Please note: AB & BN are only available with black inserts.
AB Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome, **BN** Black Nickel, **SS** Stainless Steel.

deco PLUS

Toggle Switches & Dimming

A wide selection of toggle switches and dimmers for within your home.





421



422



423



424



MD9125

MD9125 Intermediate module available.
Satin Chrome & Stainless Steel plate finishes require the use of a Pearl Nickel (PN) Toggle Switch Module.

Toggle Switches

421	10AX 1 Gang 2 Way Toggle Switch
422	10AX 2 Gang 2 Way Toggle Switch
423	10AX 3 Gang 2 Way Toggle Switch
424	10AX 4 Gang 2 Way Toggle Switch

10AX Intermediate Toggle Switch Modules

MD9125AB	Intermediate Toggle Switch Module - Antique Brass
MD9125BN	Intermediate Toggle Switch Module - Black Nickel
MD9125BR	Intermediate Toggle Switch Module - Polished Brass
MD9125CH	Intermediate Toggle Switch Module - Polished Chrome
MD9125PN	Intermediate Toggle Switch Module - Pearl Nickel

Not interchangeable with dimmers or other Minigrid™ modules.

Standards: BS EN 60669 **Back Box Depth:** 25mm Minimum **Cable Size:** 2 x 2.5mm² / 4 x 1.5mm²
Dimensions: 1 Gang: 88mm x 88mm x 8mm, **2 Gang:** 148mm x 88mm x 8mm

Understanding the code:
DP - Plate Style **BN** - Plate Finish **536** - Product No.
AB Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome, **BN** Black Nickel, **SS** Stainless Steel.



140



152



153



154

MINIGRID® Dimmer modules interchangeable with Minigrid™ Dimmers, please see page j36.
For the complete range of Minigrid™ modules please see our dedicated Minigrid™ section.

Dimmer Switches

140 1 Gang 2 Way 400Va Dimmer Switch
152 2 Gang 2 Way 400Va Dimmer Switch
153 3 Gang 2 Way 400Va Dimmer Switch
154 4 Gang 2 Way 400Va Dimmer Switch

We recommend the use of branded halogen lamps with all Deco Plus® dimmers. The use of inferior, non-branded lamps may require the nominal rating of the dimmer to be reduced. These dimmer switches have not been designed for use with LED lamps. However, they may be suitable for some good quality LED lamps. For further information please contact the Click® technical support team.

Standards: BS EN 60669, BS EN 55015 **Type:** Leading Edge
Back Box Depth: 25mm **Cable Size:** 2 x 1.5mm²
Dimensions: 1 Gang: 88mm x 88mm x 8mm, **2 Gang:** 148mm x 88mm x 8mm


Understanding the code:
DP - Plate Style **BN** - Plate Finish **536** - Product No.
AB Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome, **BN** Black Nickel, **SS** Stainless Steel.



140PL



152PL

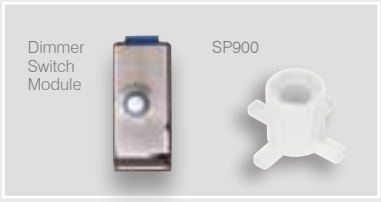




153PL



154PL



185

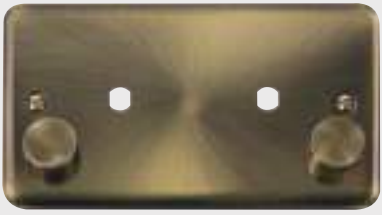

186

PL plates only available in Satin Chrome & Polished Chrome
The dimmer modules are supplied separately to the plates.

Dimmer Modules

MD9001	6A 2 Way Push On/Off (Non-Dimming) Module (25 x 62mm)
MD9010	1-10V Analogue Dimmer Module (25 x 62mm)
MD9022	250W 2 Way Dimmer Module (25 x 62mm)
MD9042	400W 2 Way Dimmer Module (25 x 62mm)
MD9014	100W Dual Mode Dimmer Module with Trim (26.5 x 55mm)

Unfurnished Dimmer Plates

140PL	1 Gang Dimmer Plate & Knob (650W Max) - 1 Aperture
152PL	2 Gang Dimmer Plate & Knobs (800W Max) - 2 Apertures
153PL	3 Gang Dimmer Plate & Knobs (1200W Max) - 3 Apertures
154PL	4 Gang Dimmer Plate & Knobs (1600W Max) - 4 Apertures
185	1 Gang Dimmer Plate & Knob (1000W Max) - 1 Aperture
186	2 Gang Dimmer Plate & Knobs (1630W Max) - 2 Apertures
SP900	Dimmer M10 Nut Runner Tool Use the nut runner to easily exchange dimmer modules and create customised dimmer switch plate.

Maximum Wattage: 185: 1000W **186:** 1630W
Back Box Depth: Dependant on modules fitted
Dimensions: 1 Gang: 88mm x 88mm x 8mm, **2 Gang:** 148mm x 88mm x 8mm **Dimmer Switch Module:** 25 x 62 x 22mm

Understanding the code:
DP - Plate Style **BN** - Plate Finish **536** - Product No.
AB Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome, **BN** Black Nickel, **SS** Stainless Steel.





Minigrid™ modules are available in the same decorative finishes as the Deco Plus® range as well as white and black, so there are plenty of options available to suit your application.



Interchangeable Plates and Modules

Minigrid™ modules are interchangeable with pre-assembled plate switches or can be mounted into the unfurnished switch plates throughout the Deco Plus® range.

Standard Minigrid™ modules offer simple, single screw fixing to the yoke which greatly facilitates the assembly of up to 18 different switching functions on a single plate.

MINIGRID®





512



518

The furnished plate shown here contains a selection of both single and twin width Minigrid™ modules.
For the full range please see our dedicated Minigrid™ section.



MINIGRID® GR100 yokes are required to mount the Minigrid™ modules into prior to assembling the frontplate. See opposite page for yoke options.

2 Tier Unfurnished Plates c/w Gaskets - MiniGrid™


512 2 Tier MiniGrid™ Unfurnished Plate - 12 Apertures

3 Tier Unfurnished Plates c/w Gaskets - MiniGrid™

518 3 Tier MiniGrid™ Unfurnished Plate - 18 Apertures

Back Box Depth: 47mm Minimum
Dimensions: 12 Module: 148mm x 148mm x 8mm **18 Module:** 148mm x 227mm x 8mm

Understanding the code:
DP - Plate Style **BN** - Plate Finish **536** - Product No.
AB Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome, **BN** Black Nickel, **SS** Stainless Steel.



Example of yoke furnished with modules



GR100





WA512



WA518

MINIGRID® Galvanised steel back boxes supplied for flush mounting of the large Minigrid™ plates. Mounting yoke facilitates pre-assembly of required modules. Fitted with twin earth terminals.

Yokes

GR100BK	MiniGrid™ Module Yoke - 6 Apertures - Black
GR100PW	MiniGrid™ Module Yoke - 6 Apertures - White

2 or 3 yokes are required based on the backbox selected.

Galvanised Steel Back Boxes

WA512	2 Tier 47mm Deep K.O. Box
WA518	3 Tier 47mm Deep K.O. Box

Dimensions: 512: 137mm x 137mm **518:** 137mm x 197mm



deco PLUS®

With the ever increasing demand for power supplies in all areas of the home, comes the problem of selecting and fitting outlets which blend harmoniously with the décor of the room in which they are to be fitted.

The seven different Deco Plus® plate finishes offer a solution for almost every possible design need and will enhance the décor of any area, whether in a kitchen, bedroom, lounge or study etc.

Power Socket Outlets, Fused Connection Units and Control Switches

- 13A WALL SOCKET OUTLETS
- ROUND PIN WALL SOCKET OUTLETS
- FUSED CONNECTION UNITS
- FAN ISOLATION SWITCHES
- DP SWITCHES
- SOCKETS WITH USB OUTLETS
- LOCKABLE SWITCHES & SOCKETS





038



039



535



836

Round Pin Socket Outlets

038 5A Round Pin Socket
039 2A Round Pin Socket

Ingot Switched Socket Outlets With Outboard Rockers

836 13A Ingot 2 Gang DP Switched Socket With Outboard Rockers (Twin Earth)
1836 2 Gang 13A DP 3 Pin Safety Shutter Outboard Switched Socket Outlet - Twin Earth

Ingot Switched Socket Outlets

535 13A Ingot 1 Gang DP Switched Socket
536 13A Ingot 2 Gang DP Switched Socket
1535 1 Gang 13A DP 3 Pin Safety Shutter Switched Socket Outlet
1536 2 Gang 13A DP 3 Pin Safety Shutter Switched Socket Outlet - Twin Earth

Standards: BS 1363 **038,039:** BS 546
Back Box Depth: 25mm Minimum **Cable Size: 2A:** 2 x 2.5mm² / 3 x 1.5mm² **5A:** 2 x 2.5mm² / 3 x 1.5mm² **13A:** 4 x 2.5mm² / 2 x 4mm² **Dimensions: 1 Gang:** 88mm x 88mm x 8mm, **2 Gang:** 148mm x 88mm x 8mm

Understanding the code:
DP - Plate Style **BN** - Plate Finish **536** - Product No. **BK** - Insert Colour Please note: AB & BN are only available with black inserts.
AB Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome, **BN** Black Nickel, **SS** Stainless Steel.



571U



580



570

Ingot Switched Sockets With USB Outlet

571U 13A Ingot 1 Gang Switched Socket With 2.1A USB Outlet (Twin Earth)
570 13A Ingot 2 Gang Switched Socket With 2.1A USB Outlet (Twin Earth)

Ingot Switched Sockets With Twin USB Outlets

580 13A Ingot 2 Gang Switched Socket With Twin 2.1A USB Outlets (4.2A) (Twin Earth)

Standards: BS1363-2, BS EN 62368-1, BS EN 62680-1-1
Back Box Depth: 25mm Minimum **Cable Size:** 4 x 2.5mm² / 2 x 4mm²
Dimensions: **1 Gang:** 88mm x 88mm x 8mm, **2 Gang:** 148mm x 88mm x 8mm

Understanding the code:
DP - Plate Style **BN** - Plate Finish **536** - Product No. **BK** - Insert Colour Please note: AB & BN are only available with black inserts.
AB Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome, **BN** Black Nickel, **SS** Stainless Steel.



024



060



100



061

Deco Plus® dual voltage shaver outlets incorporate a double wound isolating transformer rated 20Va at 230V or 115V and meets BS EN 61558-2-5: 2010, making it safe for use in bathrooms.

Shaver outlet is not continuously rated and therefore not suitable for use as a permanent charging outlet.

20A DP Sink/Bath Switch

024 20A DP Sink/Bath Switch With Neon

Dual Voltage Shaver Socket

100 115/230V Dual Voltage Shaver Socket

Blank Plates

060 1 Gang Blank Plate
061 2 Gang Blank Plate

Standards: 024: BS EN 60669 **100:** BS EN 61558
Back Box Depth: 024: 25mm min **100:** 47mm min. **Cable Size: 024:** 3 x 2.5mm² **100:** 2 x 1.5mm² / 1 x 2.5mm²
Dimensions: 1 Gang: 88mm x 88mm x 8mm, **2 Gang:** 148mm x 88mm x 8mm

Understanding the code:
DP - Plate Style **BN** - Plate Finish **536** - Product No. **BK** - Insert Colour Please note: AB & BN are only available with black inserts.
AB Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome, **BN** Black Nickel, **SS** Stainless Steel.



550



551



552



553



750



751



752



753

Ingot Fused Connection Units With Optional Flex Outlet

550	13A Ingot Fused Connection Unit
551	13A Ingot DP Switched Fused Connection Unit
552	13A Ingot DP Switched Fused Connection Unit With Neon
553	13A Ingot Fused Connection Unit With Neon

Ingot Fused Connection Units Without Flex Outlet

750	13A Ingot Fused Connection Unit
751	13A Ingot DP Switched Fused Connection Unit
752	13A Ingot DP Switched Fused Connection Unit With Neon
753	13A Ingot Fused Connection Unit With Neon

Standards: BS 1363 and BS 1362 (fuse)
Back Box Depth: 25mm Minimum **Cable Size:** 3 x 2.5mm² or 2 x 4mm²
Dimensions: **1 Gang:** 88mm x 88mm x 8mm

Understanding the code:
DP - Plate Style **BN** - Plate Finish **536** - Product No. **BK** - Insert Colour Please note: AB & BN are only available with black inserts.
AB Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome, **BN** Black Nickel, **SS** Stainless Steel.



520



522



523



722



723

3 Pole and 20A DP Switches are non-modular

Ingot Fan Isolation Switch

520 10A Ingot 3 Pole Fan Isolation Plate Switch

Ingot 20A Control Switches With Optional Flex Outlet

522 20A Ingot DP Switch
523 20A Ingot DP Switch With Neon

Ingot 20A Control Switches Without Flex Outlet

722 20A Ingot DP Switch
723 20A Ingot DP Switch With Neon

Standards: BS EN 60669 **Back Box Depth:** 25mm Minimum **Cable Size: 20A DP:** 4 x 2.5mm² **10A 3P:** 1 x 2.5mm² / 2 x 1.5mm²
Dimensions: 1 Gang: 88mm x 88mm x 8mm

Understanding the code:
DP - Plate Style **BN** - Plate Finish **536** - Product No. **BK** - Insert Colour Please note: AB & BN are only available with black inserts.
AB Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome, **BN** Black Nickel, **SS** Stainless Steel.



500



502



503



501



504



505

Ingot 45A Switches And Socket Outlets

500 45A Ingot 1 Gang DP Switch
501 45A Ingot 1 Gang DP Switch With Neon
502 45A Ingot 2 Gang DP Switch
503 45A Ingot 2 Gang DP Switch With Neon
504 45A Ingot 2 Gang DP Switch With 13A DP Switched Socket
505 45A Ingot 2 Gang DP Switch With 13A DP Switched Socket & Neons

Standards: BS EN 60669, BS 4177 **Back Box Depth:** 35mm Minimum **Cable Size: 45A:** 1 x 16mm²
Dimensions: 1 Gang: 88mm x 88mm x 8mm **2 Gang:** 148mm x 88mm x 8mm

Understanding the code:
DP - Plate Style **BN** - Plate Finish **536** - Product No. **BK** - Insert Colour Please note: AB & BN are only available with black inserts.
AB Antique Brass, **CH** Polished Chrome, **SC** Satin Chrome, **BN** Black Nickel, **SS** Stainless Steel.



660



655

Lockable Sockets

655 13A Ingot 1 Gang DP Key Lockable Socket With Neon

Lockable Switches

660 20A Double Pole Key Lockable Switch

Standards: BS 1363-2, BS EN 60669-1
Back Box Depth: 35mm Minimum **Cable Size:** 3 x 2.5mm², 2 x 4mm²
Dimensions: **1 Gang:** 88mm x 88mm x 8mm **2 Gang:** 146mm x 88mm x 8mm

Understanding the code:
DP - Plate Style **BN** - Plate Finish **536** - Product No. **BK** - Insert Colour Please note: AB & BN are only available with black inserts.
AB Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome, **BN** Black Nickel, **SS** Stainless Steel.

Television, Telephone and Data Sockets

- RJ11 OUTLET
- UK TELEPHONE OUTLETS
- SATELLITE SOCKET OUTLETS
- COAXIAL SOCKETS

The following pages contain details of Deco Plus® products designed to deal with handling data and media transfer through telephone, computer, television or radio.

As well as the finished products please also find details of unfurnished mounting plates designed to accept custom selections of New Media™ modules from our dedicated modules brochure.





115



120 / 125



121 / 126

Twin outlets are 2 separate sockets and are not internally linked together.

RJ11 Telephone Outlet

115 Single RJ11 (Irish/US) Outlet

Telephone Outlets

120 Single Telephone Outlet - Master
121 Twin Telephone Outlet - Master
125 Single Telephone Outlet - Secondary
126 Twin Telephone Outlet - Secondary

Back Box Depth: 16mm Minimum **115:** 35mm Minimum **Termination Type:** IDC
Dimensions: 1 Gang: 88mm x 88mm x 8mm

Understanding the code:
DP - Plate Style **BN** - Plate Finish **536** - Product No. **BK** - Insert Colour Please note: AB & BN are only available with black inserts.
AB Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome, **BN** Black Nickel, **SS** Stainless Steel.



158 / 065



159 / 066



156



157 / 170

Isolated outlets will filter out any interference.
If a 2 way signal is required, i.e. for use with satellite hard wire extensions, then a non-isolated outlet is required.

Non-Isolated Coaxial Outlets (Unshielded)

065 Single Coaxial Outlet
066 Twin Coaxial Outlet

Isolated Coaxial Outlets (Unshielded)

158 Single Isolated Coaxial Outlet
159 Twin Isolated Coaxial Outlet

Satellite Outlets (Unshielded)

156 Non-Isolated Single Satellite Outlet
157 Isolated Satellite & Isolated Coaxial Outlet
170 Non-Isolated Satellite & Non-Isolated Coaxial Outlet

Back Box Depth: 16mm Minimum
Dimensions: 1 Gang: 88mm x 88mm x 8mm

Understanding the code:
DP - Plate Style **BN** - Plate Finish **536** - Product No. **BK** - Insert Colour Please note: AB & BN are only available with black inserts.
AB Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome, **BN** Black Nickel, **SS** Stainless Steel.

new media™

Solutions for media cabling


Selecting from a range of module inserts covering all manner of media transfer, installers will now be able to configure their own arrangement of television, radio or satellite reception, plus speaker, telephone and data outlets. All modules can be inserted into single or double wall plates and fitted onto standard switch and socket boxes.



The furnished plate shown here contains a selection of both single and twin width New Media™ modules.

The New Media™ range provides the installer with ultimate flexibility, allowing you to mix and match the connections you have on your wall plate. All modules are available in white or black finishes to complement any installation.



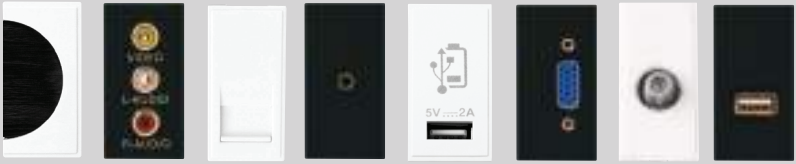



310



311



312

new media™

All plates supplied with black and white gaskets where applicable.
Above are some examples of New Media™ modules we offer, please see our dedicated New Media™ section for more information on the range of modules available.

Unfurnished Plates - New Media™

310	1 Gang New Media™ Unfurnished Plate - 1 Aperture
311	1 Gang New Media™ Unfurnished Plate - 2 Apertures
312	2 Gang New Media™ Unfurnished Plate - 4 Apertures

Back Box Depth: 310, 311, 312: dependant on module used.
Dimensions: 1 Gang: 88mm x 88mm x 8mm **2 Gang:** 148mm x 88mm x 8mm

Understanding the code:
DP - Plate Style **BN** - Plate Finish **536** - Product No.
AB Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome, **BN** Black Nickel, **SS** Stainless Steel.



WA375



WA370



MCP086



MCP085



WA671



WA672

For more Back Boxes see page m22

Surface Mounting Boxes - Metal Clad Grey

MCP085 1 Gang 40mm Deep Mounting Box
MCP086 2 Gang 40mm Deep Mounting Box

Galvanised Boxes

WA370 1 + 1 35mm Deep Dual Accessory Box (Deco® Range Only)
WA375 1 + 2 35mm Deep Dual Accessory Box (Deco® Range Only)
WA671 1 Gang 25mm Deep Architrave Box With 60.3mm Hole Centres
WA672 2 Gang 25mm Deep Architrave Box With 120.6mm Hole Centres

deco®

Decorative Metal Wiring Accessories





deco®

Decorative Metal Wiring Accessories in Assorted Plate Finishes

Contents

Switches	**c5**
Back Boxes	**c9**
Power Socket Outlets	**c14**
13A Fused Connection Units	**c16**
Control Switches	**c18**
Socket & Blank Plates	**c23**
Telephone & Data Sockets	**c26**
TV & Satellite	**c27**
New Media™ Plates	**c28**
Galvanised Boxes	**c29**
Dry Lining Boxes	**c30**

A comprehensive range of decorative metal wiring accessories now available under the single Deco® brand. A brand that is synonymous with high specification, high quality, long life and unprecedented value for money.

Each product is supplied individually packaged in its own distinctive printed box complete with comprehensive fitting instructions.

Deco® switches feature the same modular switch design as our moulded ranges. All of the switch modules featured in our dedicated modules brochure can therefore be used in any combination on Deco® accessories.

Deco® plates are manufactured from stainless steel, georgian style (GCBR) plates are manufactured from cast brass.

All Deco® 13A sockets and fused connection units are tested and approved to BS1363 offering assured quality and safety.



Deco® unique product codes

When ordering any Deco® products, please specify the required finish by following the simple code structure as demonstrated here.
For georgian style cast brass, please replace the 'Plate Style' and 'Product Finish' with GCBR eg. GCBR036BK.

VP	BN	036	BK
Plate Style	Product Finish	Product Number	Insert Colour

Every Deco® product featured in the pages of this brochure are available in 9 distinctive quality finishes: antique brass*, polished brass, polished chrome, satin chrome*, satin brass*, black nickel, pearl nickel, stainless steel and georgian style cast brass. *UK Design Registration 3015621.

All Deco® products are available with black or white inserts, excluding antique brass and black nickel finishes which are supplied with black insert and gasket only.



Polished Chrome (CH)



Antique Brass* (AB)



Satin Chrome* (SC)



Black Nickel (BN)



Georgian Style (GCBR)



Satin Brass* (SB)



Polished Brass (BR)



Stainless Steel (SS)



Pearl Nickel (PN)




Switches

All Deco® switches are supplied complete with requisite switch module(s). However, should local conditions dictate, the installer may customise a switch arrangement by substituting switch modules by means of a simple, single fixing screw.

A comprehensive range of available modules is illustrated in our dedicated Minigrid™ brochure section.

Unfurnished mounting plates can be ordered separately and furnished with whatever selection of switch modules may be required.



All Deco® switch plates are modular as standard, allowing you to create virtually any switch plate you require e.g. Two way switch next to an intermediate switch (shown above).

Modular Ingot Plate Switches
Dimmer Switches | Toggle Switches



011 (025 intermediate)



012



013



019



105

MINIGRID® Switch modules interchangeable with Minigrid™ modules
For the complete range of Minigrid™ modules, see the dedicated Minigrid™ section, page j18.

Plates Switches - MiniGrid™

011	10AX 1 Gang 2 Way Plate Switch
012	10AX 2 Gang 2 Way Plate Switch
013	10AX 3 Gang 2 Way Plate Switch
019	10AX 4 Gang 2 Way Plate Switch
105	10AX 6 Gang 2 Way Plate Switch

Plates Switches - MiniGrid™

025	10AX 1 Gang Intermediate Plate Switch

Standards: BS EN 60669
Back Box Depth: 16mm Minimum **Cable Size:** 4 x 1.5mm² / 2 x 2.5mm² / 1 x 6mm² Maximum
Dimensions: **1 Gang:** (88mm x 88mm x 8mm), **2 Gang:** (146mm x 88mm x 8mm)

Understanding the code:
VP - Plate Style **BN** - Plate Finish **011** - Product No. **BK** - Insert Colour **Please note:** AB & BN are only available with black inserts.
AB Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome,
BN Black Nickel, **SS** Stainless Steel, **PN** Pearl Nickel, **GCBR** Georgian Style.



411 (425 intermediate switch)




412



413



414

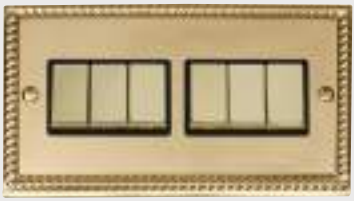

416

MINIGRID® For the complete range of Minigrid™ modules, see the dedicated Minigrid™ section, page j18.

Ingot Plates Switches - MiniGrid™

411	10AX Ingot 1 Gang 2 Way Plate Switch
412	10AX Ingot 2 Gang 2 Way Plate Switch
413	10AX Ingot 3 Gang 2 Way Plate Switch
414	10AX Ingot 4 Gang 2 Way Plate Switch
416	10AX Ingot 6 Gang 2 Way Plate Switch

Ingot Plates Switches - MiniGrid™

425	10AX Ingot 1 Gang Intermediate Plate Switch

Standards: BS EN 60669
Back Box Depth: 16mm Minimum **Cable Size:** 4 x 1.5mm² / 2 x 2.5mm² / 1 x 6mm² Maximum
Dimensions: **1 Gang:** (88mm x 88mm x 8mm), **2 Gang:** (146mm x 88mm x 8mm)

Understanding the code:
VP - Plate Style **BN** - Plate Finish **011** - Product No. **BK** - Insert Colour **Please note:** AB & BN are only available with black inserts.
AB Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome,
BN Black Nickel, **SS** Stainless Steel, **PN** Pearl Nickel, **GCBR** Georgian Style.



401



402



403



471



404



406



426



432



472

MINIGRID® For the complete range of Minigrid™ modules, see the dedicated Minigrid™ section, page j18.

Unfurnished Plates - MiniGrid™

401	1 Gang MiniGrid™ Unfurnished Plate - 1 Aperture
402	1 Gang MiniGrid™ Unfurnished Plate - 2 Apertures
403	1 Gang MiniGrid™ Unfurnished Plate - 3 Apertures
404	2 Gang MiniGrid™ Unfurnished Plate - 2 x 2 Apertures
406	2 Gang MiniGrid™ Unfurnished Plate - 2 x 3 Apertures
426	2 Gang MiniGrid™ Unfurnished Plate - 6 In-Line Apertures
432	2 Gang MiniGrid™ Unfurnished Plate - 3 Apertures

Please note 432 is not available in BN, BR, PN, SB or GCBR.

Architrave Switch Plates (Unfurnished)

471	1 Gang MiniGrid™ Unfurnished Architrave Plate - 1 Aperture
472	2 Gang MiniGrid™ Unfurnished Architrave Plate - 2 Apertures


These Architrave plates must be used with the dedicated architrave back boxes WA571 / WA572 and can only be flush mounted. See page c29.

Back Box Depth: Dependant on modules used
Dimensions: 1 Gang: (88mm x 88mm x 8mm), **2 Gang:** (146mm x 88mm x 8mm),
Single architrave: (35mm x 88mm x 8mm), **Twin architrave:** (35mm x 150mm x 8mm)

Understanding the code:
VP - Plate Style **BN** - Plate Finish **011** - Product No. **BK** - Insert Colour **Please note:** AB & BN are only available with black inserts.
AB Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome,
BN Black Nickel, **SS** Stainless Steel, **PN** Pearl Nickel, **GCBR** Georgian Style.



512

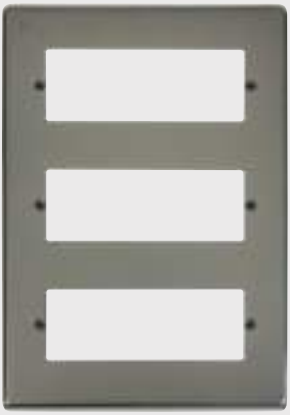

518



MINIGRID®

The furnished plate shown here contains a selection of both single and twin width Minigrid™ modules.GR100 yokes are required to mount the Minigrid™ modules into prior to assembling the frontplate.

MINIGRID® For the complete range of Minigrid™ modules, see the dedicated Minigrid™ section, page j18.

2 Tier Unfurnished Plates c/w Gaskets - MiniGrid™


512 2 Tier MiniGrid™ Unfurnished Plate - 12 Apertures

3 Tier Unfurnished Plates c/w Gaskets - MiniGrid™

518 3 Tier MiniGrid™ Unfurnished Plate - 18 Apertures

Back Box Depth: 47mm Minimum
Dimensions: **12 Module:** (146mm x 146mm x 8mm) **18 Module:** (146mm x 227mm x 8mm)

Understanding the code:
VP - Plate Style **BN** - Plate Finish **011** - Product No. **Please note:** Supplied with both black & white gaskets (**AB** & **BN** supplied with black gaskets only)
AB Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome,
BN Black Nickel, **SS** Stainless Steel, **PN** Pearl Nickel, **GCBR** Georgian Style.



Example of yoke furnished with modules



GR100





WA512



WA518

MINIGRID® Galvanised steel back boxes supplied for flush mounting of the large Minigrid™ plates. Mounting yoke facilitates pre-assembly of required modules. Fitted with twin earth terminals.

Yokes

GR100BK	MiniGrid™ Module Yoke - 6 Apertures - Black
GR100PW	MiniGrid™ Module Yoke - 6 Apertures - White

2 or 3 yokes are required based on the backbox selected.

Galvanised Steel Back Boxes

WA512	2 Tier 47mm Deep K.O. Box
WA518	3 Tier 47mm Deep K.O. Box

Cutout Sizes: WA512: 137mm x 137mm **WA518:** 137mm x 197mm



140



152



153



154

MINIGRID® Interchangeable modules available on page j36

Dimmer Switches

140	1 Gang 2 Way 400Va Dimmer Switch
152	2 Gang 2 Way 400Va Dimmer Switch
153	3 Gang 2 Way 400Va Dimmer Switch
154	4 Gang 2 Way 400Va Dimmer Switch

We recommend the use of branded halogen lamps with all Deco® dimmers. The use of inferior, non-branded lamps may require the nominal rating of the dimmer to be reduced. These dimmer switches have not been designed for use with LED lamps. However, they may be suitable for some good quality LED lamps. For further information please contact the Click® technical support team.

Standards: BS EN 60669, BS EN 55015 **Type:** Leading Edge
Back Box Depth: 25mm **Cable Size:** 2 x 1.5mm²
Dimensions: **1 Gang:** (88mm x 88mm x 8mm), **2 Gang:** (146mm x 88mm x 8mm)

Understanding the code:
VP - Plate Style **BN** - Plate Finish **011** - Product No. **Please note:** Supplied with both black & white gaskets (**AB** & **BN** supplied with black gaskets only)
AB Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome,
BN Black Nickel, **SS** Stainless Steel, **PN** Pearl Nickel, **GCBR** Georgian Style.



140PL



152PL



SP900



MD9014



153PL



154PL



185



186

PL plates only available in Satin Chrome & Polished Chrome
The dimmer modules are supplied separately to the plates.

Dimmer Modules

MD9001	6A 2 Way Push On/Off (Non-Dimming) Module (25 x 62mm)
MD9010	1-10V Analogue Dimmer Module (25 x 62mm)
MD9022	250W 2 Way Dimmer Module (25 x 62mm)
MD9042	400W 2 Way Dimmer Module (25 x 62mm)
MD9014	100W Dual Mode Dimmer Module with Trim (26.5 x 55mm)

Dimmer Mounting Unfurnished Plates

140PL	1 Gang Dimmer Plate & Knob (650W Max) - 1 Aperture
152PL	2 Gang Dimmer Plate & Knobs (800W Max) - 2 Apertures
153PL	3 Gang Dimmer Plate & Knobs (1200W Max) - 3 Apertures
154PL	4 Gang Dimmer Plate & Knobs (1600W Max) - 4 Apertures
185	1 Gang Dimmer Plate & Knob (1000W Max) - 1 Aperture
186	2 Gang Dimmer Plate & Knobs (1630W Max) - 2 Apertures
SP900	Dimmer M10 Nut Runner Tool

Use the nut runner to easily exchange dimmer modules and create customised dimmer switch plate.

Maximum Wattage: 185: 1000W, **186:** 1630W
Back Box Depth: Dependant on modules fitted
Dimensions: 1 Gang: (88mm x 88mm x 8mm), **2 Gang:** (146mm x 88mm x 8mm)

Understanding the code:
VP - Plate Style **BN** - Plate Finish **011** - Product No. **Please note:** Supplied with both black & white gaskets (**AB** & **BN** supplied with black gaskets only)
AB Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome,
BN Black Nickel, **SS** Stainless Steel, **PN** Pearl Nickel, **GCBR** Georgian Style.



421



MD9125



422



423



424

Satin Chrome & Stainless Steel plate finishes require the use of a Pearl Nickel (PN) toggle switch module.

Toggle Switches

421	10AX 1 Gang 2 Way Toggle Switch
422	10AX 2 Gang 2 Way Toggle Switch
423	10AX 3 Gang 2 Way Toggle Switch
424	10AX 4 Gang 2 Way Toggle Switch

10AX Intermediate Toggle Switch Modules

MD9125AB	Intermediate Toggle Switch Module - Antique Brass
MD9125BN	Intermediate Toggle Switch Module - Black Nickel
MD9125BR	Intermediate Toggle Switch Module - Polished Brass
MD9125CH	Intermediate Toggle Switch Module - Polished Chrome
MD9125PN	Intermediate Toggle Switch Module - Pearl Nickel

Not interchangeable with dimmers or other Minigrid™ modules.

Standards: BS EN 60669
Back Box Depth: 25mm Minimum **Cable Size:** 2 x 2.5mm² / 4 x 1.5mm²
Dimensions: **1 Gang:** (88mm x 88mm x 8mm), **2 Gang:** (146mm x 88mm x 8mm)

Understanding the code:
VP - Plate Style **BN** - Plate Finish **011** - Product No. **Please note:** Supplied with both black & white gaskets (**AB** & **BN** supplied with black gaskets only)
AB Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome,
BN Black Nickel, **SS** Stainless Steel, **PN** Pearl Nickel, **GCBR** Georgian Style.

Power Socket Outlets, Fused Connection Units & Control Switches

With the ever increasing demand for power supplies in all areas of the home comes the problem of selecting and fitting outlets which blend harmoniously with the décor of the room in which they are to be fitted.

The 9 different Deco® plate finishes offer a solution for almost every possible design need and will enhance the décor of any area whether in a kitchen, bedroom, lounge or study etc...



13A Wall Socket Outlets | Round Pin
Fused Connection Units | Wall Socket Outlets
Fan Isolation Switches | DP Switches



535



035



536



036



1536



1836

Switched Socket Outlets

035 13A 1 Gang DP Switched Socket
036 13A 2 Gang DP Switched Socket

Ingot Switched Socket Outlets

535 13A Ingot 1 Gang DP Switched Socket
536 13A Ingot 2 Gang DP Switched Socket
1535 1 Gang 13A DP 3 Pin Safety Shutter Switched Socket Outlet
1536 2 Gang 13A DP 3 Pin Safety Shutter Switched Socket Outlet - Twin Earth

Ingot Switched Safety Shutter Socket Outlets With Outboard Rockers

1836 2 Gang 13A DP 3 Pin Safety Shutter Outboard Switched Socket Outlet - Twin Earth

Standards: 035,036, 535,536: BS 1363
Back Box Depth: 25mm Minimum **Cable Size: 13A:** 4 x 2.5mm² / 2 x 4mm²
Dimensions: 1 Gang: (88mm x 88mm x 8mm), **2 Gang:** (146mm x 88mm x 8mm)

Understanding the code:
VP - Plate Style **BN** - Plate Finish **011** - Product No. **BK** - Insert Colour **Please note:** AB & BN are only available with black inserts.
AB Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome,
BN Black Nickel, **SS** Stainless Steel, **PN** Pearl Nickel, **GCBR** Georgian Style.



038



571U



770



570



780



580

Switched Sockets With USB Outlet

771U	13A 1 Gang Switched Socket With 2.1A USB Outlet (Twin Earth)
770	13A 2 Gang Switched Socket With 2.1A USB Outlet (Twin Earth)
780	13A 2 Gang Switched Socket With Twin 2.1A USB Outlets (4.2A) (Twin Earth)

Round Pin Socket Outlets

038	5A Round Pin Socket
039	2A Round Pin Socket

Ingot Switched Sockets With USB Outlet

571U	13A Ingot 1 Gang Switched Socket With 2.1A USB Outlet
570	13A Ingot 2 Gang Switched Sockets With 2.1A USB Outlet (Twin Earth)
580	13A Ingot 2 Gang Switched Socket With Twin 2.1A USB Outlets (4.2A) (Twin Earth)

Standards: BS1363, BS5733, BS60950-1, EN61000-6-1, EN 61000-6-3 **038,039:** BS 546
Back Box Depth: 25mm, **Cable Size:** 4 x 2.5mm² / 2 x 4mm² **2A:** 2 x 2.5mm² / 3 x 1.5mm² **5A:** 2 x 2.5mm² / 3 x 1.5mm²
Dimensions: 1 Gang: (88mm x 88mm x 8mm), **2 Gang:** (146mm x 88mm x 8mm)

Understanding the code:
VP - Plate Style **BN** - Plate Finish **011** - Product No. **BK** - Insert Colour **Please note:** AB & BN are only available with black inserts.
AB Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome,
BN Black Nickel, **SS** Stainless Steel, **PN** Pearl Nickel, **GCBR** Georgian Style.



050



051



052



053



650



651



652



653

Fused Connection Units With Optional Flex Outlet

050 13A Fused Connection Unit
051 13A DP Switched Fused Connection Unit
052 13A DP Switched Fused Connection Unit With Neon
053 13A Fused Connection Unit With Neon

Fused Connection Units Without Flex Outlet

650 13A Fused Connection Unit
651 13A DP Switched Fused Connection Unit
652 13A DP Switched Fused Connection Unit With Neon
653 13A Fused Connection Unit With Neon

Standards: BS 1363 and BS 1362 (fuse)
Back Box Depth: 25mm Minimum **Cable Size:** 3 x 2.5mm² or 2 x 4mm²
Dimensions: 1 Gang: (88mm x 88mm x 8mm)

Understanding the code:
VP - Plate Style **BN** - Plate Finish **011** - Product No. **BK** - Insert Colour **Please note:** AB & BN are only available with black inserts.
AB Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome,
BN Black Nickel, **SS** Stainless Steel, **PN** Pearl Nickel, **GCBR** Georgian Style.



550



551



552



553



750



751



752



753

Ingot Fused Connection Units With Optional Flex Outlet

550	13A Ingot Fused Connection Unit
551	13A Ingot DP Switched Fused Connection Unit
552	13A Ingot DP Switched Fused Connection Unit With Neon
553	13A Ingot Fused Connection Unit With Neon

Ingot Fused Connection Units Without Flex Outlet

750	13A Ingot Fused Connection Unit
751	13A Ingot DP Switched Fused Connection Unit
752	13A Ingot DP Switched Fused Connection Unit With Neon
753	13A Ingot Fused Connection Unit With Neon

Standards: BS 1363 and BS 1362 (fuse)
Back Box Depth: 25mm Minimum **Cable Size:** 3 x 2.5mm² or 2 x 4mm²
Dimensions: **1 Gang:** (88mm x 88mm x 8mm)

Understanding the code:
VP - Plate Style **BN** - Plate Finish **011** - Product No. **BK** - Insert Colour **Please note:** AB & BN are only available with black inserts.
AB Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome,
BN Black Nickel, **SS** Stainless Steel, **PN** Pearl Nickel, **GCBR** Georgian Style.



022



023



623



622



020

20A Control Switches With Optional Flex Outlet

022 20A DP Switch
023 20A DP Switch With Neon

20A Control Switches Without Flex Outlet

622 20A DP Switch
623 20A DP Switch With Neon

3 pole and 20A DP switches are non-modular

Fan Isolation Switch

020 10A 3 Pole Fan Isolation Switch

This product is not modular

Standards: BS EN 60669
Back Box Depth: 25mm Minimum **Cable Size:** **20A DP:** 4 x 2.5mm² **10A 3P:** 1 x 2.5mm² / 2 x 1.5mm²
Dimensions: **1 Gang:** (88mm x 88mm x 8mm)

Understanding the code:
VP - Plate Style **BN** - Plate Finish **011** - Product No. **BK** - Insert Colour **Please note:** AB & BN are only available with black inserts.
AB Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome,
BN Black Nickel, **SS** Stainless Steel, **PN** Pearl Nickel, **GCBR** Georgian Style.



522



523



722



520



723

Ingot Fan Isolation Switch

520 10A Ingot 3 Pole Fan Isolation Plate Switch

This product is not modular

Ingot 20A Control Switches With Optional Flex Outlet

522 20A Ingot DP Switch
523 20A Ingot DP Switch With Neon

Ingot 20A Control Switches Without Flex Outlet

722 20A Ingot DP Switch
723 20A Ingot DP Switch With Neon

3 pole and 20A DP switches are non-modular

Standards: BS EN 60669
Back Box Depth: 25mm Minimum **Cable Size: 20A DP:** 4 x 2.5mm² 10A 3P: 1 x 2.5mm² / 2 x 1.5mm²
Dimensions: 1 Gang: (88mm x 88mm x 8mm)

Understanding the code:
VP - Plate Style **BN** - Plate Finish **011** - Product No. **BK** - Insert Colour **Please note:** AB & BN are only available with black inserts.
AB Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome,
BN Black Nickel, **SS** Stainless Steel, **PN** Pearl Nickel, **GCBR** Georgian Style.



200



201



202



204



205



203

45A Switches And Socket Outlets

200	45A 1 Gang DP Switch
201	45A 1 Gang DP Switch With Neon
202	45A 2 Gang DP Switch
203	45A 2 Gang DP Switch With Neon
204	45A 2 Gang DP Switch With 13A DP Switched Socket
205	45A 2 Gang DP Switch With 13A DP Switched Socket & Neons

Standards: BS EN 60669, BS 4177
Back Box Depth: 35mm Minimum **Cable Size: 45A:** 1 x 16mm²
Dimensions: 1 Gang: (88mm x 88mm x 8mm), **2 Gang:** (146mm x 88mm x 8mm)

Understanding the code:
VP - Plate Style **BN** - Plate Finish **011** - Product No. **BK** - Insert Colour **Please note:** AB & BN are only available with black inserts.
AB Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome,
BN Black Nickel, **SS** Stainless Steel, **PN** Pearl Nickel, **GCBR** Georgian Style.



500



501



502



504



505



503

Ingot 45A Switches And Socket Outlets

500	45A Ingot 1 Gang DP Switch
501	45A Ingot 1 Gang DP Switch With Neon
502	45A Ingot 2 Gang DP Switch
503	45A Ingot 2 Gang DP Switch With Neon
504	45A Ingot 2 Gang DP Switch With 13A DP Switched Socket
505	45A Ingot 2 Gang DP Switch With 13A DP Switched Socket & Neons

Only available in selected finishes: CH, SC, AB, BN, PN & SS

Standards: BS EN 60669, BS 4177
Back Box Depth: 35mm Minimum **Cable Size: 45A:** 1 x 16mm²
Dimensions: 1 Gang: (88mm x 88mm x 8mm), **2 Gang:** (146mm x 88mm x 8mm)

Understanding the code:
VP - Plate Style **BN** - Plate Finish **011** - Product No. **BK** - Insert Colour **Please note:** AB & BN are only available with black inserts.
AB Antique Brass, **CH** Polished Chrome, **SC** Satin Chrome, **BN** Black Nickel, **SS** Stainless Steel, **PN** Pearl Nickel.



660



655



675

Ingot Lockable Sockets

655 13A Ingot 1 Gang DP Key Lockable Socket With Neon

Lockable Sockets

675 13A 1 Gang DP Key Lockable Socket With Neon

Lockable Switches

660 20A Double Pole Key Lockable Switch

Standards: BS 1363-2, BS EN 60669-1
Back Box Depth: 35mm Minimum **Cable Size:** 3 x 2.5mm², 2 x 4mm²
Dimensions: **1 Gang:** (88mm x 88mm x 8mm), **2 Gang:** (146mm x 88mm x 8mm)

Understanding the code:
VP - Plate Style **BN** - Plate Finish **011** - Product No. **BK** - Insert Colour **Please note:** AB & BN are only available with black inserts.
AB Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome,
BN Black Nickel, **SS** Stainless Steel, **PN** Pearl Nickel, **GCBR** Georgian Style.



024



060



061



100

20A DP Sink/Bath Switch

024 20A DP Sink/Bath Switch With Neon

Blank Plates

060 1 Gang Blank Plate
061 2 Gang Blank Plate

Dual Voltage Shaver Socket

100 115/230V Dual Voltage Shaver Socket

Click® dual voltage shaver outlets incorporate a double wound isolating transformer rated 20Va at 230V or 115V and meets BS EN 61558-2-5: 2010 making it safe for use in bathrooms.

Shaver outlet is not continuously rated and therefore not suitable for use as a permanent charging outlet.

Standards: 024: BS EN 60669 **100:** BS EN 61558
Back Box Depth: 024: 25mm min **100:** 47mm min. **Cable Size: 024:** 3 x 2.5mm² **100:** 2 x 1.5mm² / 1 x 2.5mm²
Dimensions: 1 Gang: (88mm x 88mm x 8mm), **2 Gang:** (146mm x 88mm x 8mm)

Understanding the code:
VP - Plate Style **BN** - Plate Finish **011** - Product No. **BK** - Insert Colour **Please note:** AB & BN are only available with black inserts.
AB Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome,
BN Black Nickel, **SS** Stainless Steel, **PN** Pearl Nickel, **GCBR** Georgian Style.

TV, Telephone & Data Sockets

The following pages contain details of Deco® products designed to deal with handling data and media transfer through telephone, computer, TV or radio. As well as the finished products please also find details of unfurnished mounting plates designed to accept custom selections of New Media™ modules from our dedicated modules section.





RJ11 Outlet | UK Telephone Outlets
Satellite Socket Outlets | Coaxial Sockets



115



120 / 125



121 / 126

RJ11 Telephone Outlets

115	Single RJ11 (Irish/US) Outlet

Telephone Outlets

120	Single Telephone Outlet - Master
121	Twin Telephone Outlet - Master
125	Single Telephone Outlet - Secondary
126	Twin Telephone Outlet - Secondary

Twin outlets are 2 separate sockets and not internally linked together.

Back Box Depth: 16mm Minimum **115:** 35mm Minimum **Termination Type:** IDC
Dimensions: 1 Gang: (88mm x 88mm x 8mm)

Understanding the code:
VP - Plate Style **BN** - Plate Finish **011** - Product No. **BK** - Insert Colour **Please note:** AB & BN are only available with black inserts.
AB Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome,
BN Black Nickel, **SS** Stainless Steel, **PN** Pearl Nickel, **GCBR** Georgian Style.



156



157 / 170



158



159

Satellite Outlets (Unshielded)

156 Non-Isolated Single Satellite Outlet
157 Isolated Satellite & Isolated Coaxial Outlet
170 Non-Isolated Satellite & Non-Isolated Coaxial Outlet

Isolated outlets will filter out any interference, if a 2 way signal is required, i.e. for use with satellite hard wire extensions, then a non-isolated outlet is required.

Non-Isolated Coaxial Outlets (Unshielded)

065 Single Coaxial Outlet
066 Twin Coaxial Outlet

Isolated Coaxial Outlets (Unshielded)

158 Single Isolated Coaxial Outlet
159 Twin Isolated Coaxial Outlet

Back Box Depth: 16mm Minimum
Dimensions: 1 Gang: (88mm x 88mm x 8mm)

Understanding the code:
VP - Plate Style **BN** - Plate Finish **011** - Product No. **BK** - Insert Colour **Please note:** AB & BN are only available with black inserts.
AB Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome,
BN Black Nickel, **SS** Stainless Steel, **PN** Pearl Nickel, **GCBR** Georgian Style.


310


311


312


MP606


MM410BK


MM405WH


MM501BK


MM440BK

See our dedicated New Media™ section for more information on the range of New Media™ modules available.

Unfurnished Plates - New Media™

310†	1 Gang New Media™ Unfurnished Plate - 1 Aperture
311	1 Gang New Media™ Unfurnished Plate - 2 Apertures
312	2 Gang New Media™ Unfurnished Plate - 4 Apertures
MP606*	Large New Media™ Part Furnished Front Plate - 4 x 13A DP Switched Sockets & 2 x 3 Apertures

*Available in Chrome (CH), Satin Chrome (SC) and Polar™ White (PW) All plates supplied with black and white gaskets where applicable.
†Excludes GCBR Finish


Selecting from a range of module inserts covering all manner of media transfer, the installer will now be able to configure their own arrangement of TV, radio or satellite reception, plus speaker, telephone and data outlets. All modules can be inserted into single or double wall plates, fitted onto standard switch and socket boxes.

The plate has its own dedicated 47mm deep galvanised steel mounting box (MP525) for flush fitting, featuring segregation walls which is supplied separate to the plate.

Back Box Depth: 310, 311, 312: Dependant on module used **MP606:** 47mm **Cable Size: MP606:** 13A 4 x 2.5mm
Dimensions: 1 Gang: (88mm x 88mm x 8mm), **2 Gang:** (146mm x 88mm x 8mm). **MP606:** 250mm x 216mm x 9mm



WA093



SP650



SP675



WA094



WA095



WA571



WA572



WA370



WA375

essentials™

For the complete range of back boxes see Essentials™ page m4.

Galvanised Steel Back Boxes

WA093	1 Gang 25mm Deep Galvanised Steel K.O. Box
WA094	2 Gang 25mm Deep Galvanised Steel K.O. Box
WA095	1 Gang 35mm Deep Galvanised Steel K.O. Box
WA096	2 Gang 35mm Deep Galvanised Steel K.O. Box
WA097	1 Gang 47mm Deep Galvanised Steel K.O. Box
WA370	1 + 1 35mm Deep Dual Accessory Box (Deco® Range Only)
WA375	1 + 2 35mm Deep Dual Accessory Box (Deco® Range Only)
WA571	1 Gang 25mm Deep Architrave Galvanised Steel K.O. Box (Deco® Range Only)
WA572	2 Gang 25mm Deep Architrave Galvanised Steel K.O. Box (Deco® Range Only)

Longer Fixing Screws

SP650	Standard 3.5mm Dia. 50mm Long Screws (Bag 100)
SP675	Standard 3.5mm Dia. 75mm Long Screws (Bag 100)
SP625	Standard M3.5 Security Screw 25mm Long (Bag 100)

Require 2mm security allen key/driver.

Dimensions: WA571: 87mm x 34mm x 25mm **WA572:** 148mm x 34mm x 25mm

Understanding the code:
Screws available in **BR** Brass, **CH** Chrome and **BN** Black Nickel finishes.
Suffix code with preferred finish.
Chrome finish may be used with white plate accessories



WA106P



WA107P



GA100



WA4135



WA4247

essentials™

For the complete range of back boxes see Essentials™ page m7.

Dry Lining Boxes

WA087P	1 Gang 35mm Deep Dry Lining Box
WA088P	2 Gang 35mm Deep Dry Lining Box
WA106P	1 Gang 47mm Deep Dry Lining Box
WA107P	2 Gang 47mm Deep Dry Lining Box
WA108P	Round Ceiling 34mm Deep Dry Lining Box

FlameGuard® Dry Lining Boxes

WA4135	1 Gang 35mm Deep FlameGuard® Dry Lining Box
WA4147	1 Gang 47mm Deep FlameGuard® Dry Lining Box
WA4235	2 Gang 35mm Deep FlameGuard® Dry Lining Box
WA4247	2 Gang 47mm Deep FlameGuard® Dry Lining Box

Ezylink' Dry Lining Boxes

GA100	'Ezylink' Dry Lining Box Connector

FlameGuard® back boxes have been tested and conform to both fire and acoustic BS EN 1364-1:2015 Acoustic: BS EN ISO 10140-2: 2010
Complies with Building Regulations
Fire tested up to 90 minutes with the capability of the boxes being mounted back to back.

define®

Decorative Flat Plate Electrical Accessories





define®

Decorative Flat Plate Electrical Accessories in Various Plate Finishes

Contents

Switches	**d5**
Power Socket Outlets	**d11**
13A Fused Connection Units	**d13**
Control Switches	**d16**
Socket & Blank Plates	**d17**
Telephone & Data Sockets	**d20**
TV & Satellite	**d21**
New Media™ Plates	**d22**
Galvanised Boxes	**d23**
Dry Lining Boxes	**d24**

Conventional plate accessory design with a standard 6mm return on the plate depth, limits the design opportunities in many installations by virtue of the fact that the plate becomes the feature instead of complementing the features of the decoration in a room.

The Define® flat plate range of accessories offers up a host of new design opportunities with a comprehensive range of electrical accessory products available in 5 different decorative plate finishes. Define® plates are coated stainless steel.

The comprehensive range of products includes plate switches of different construction, including traditional 'dolly' style, contemporary self coloured Ingot switches and, of course, rotary dimmer switches. The modular construction of the standard moulded Click® range of switches has been incorporated into the Define® range. When used in conjunction with the Minigrid™ range of blank mounting plates, customised switching solutions can easily be created with a wide selection of module options.



Define® unique product codes

When ordering any Define® products, please specify the required finish by following the simple code structure as demonstrated here.

FP	BN	411	BK
Plate Style	Product Finish	Product Number	Insert Colour

Amongst the socket range can be found standard switched 13A sockets plus 2A and 5A round pin sockets for dedicated lighting circuits etc..

Different configurations of fused connection units and control switches, together with 45A switches and assorted data and media accessories all contribute to an exciting and aesthetically pleasing wiring solution offered by the high quality Define® product group.

All Define® products are available with black or white inserts, excluding black nickel finishes which are supplied with black insert.

Every Define® product featured in the pages of this brochure is available in 5 distinctive quality finishes:
Polished Chrome, Stainless Steel, Brushed Stainless*, Pearl Nickel and Black Nickel. *UK Design Registration 3015621



Brushed Stainless* (BS)



Black Nickel (BN)



Pearl Nickel (PN)



Polished Chrome (CH)



Stainless Steel (SS)




Switches

Modular Switches – the standard switch modules used in the Define® product are self coloured Ingot style switches which feature single screw fixing to the face plate.

Design flexibility is enhanced by availability of multi-function and fully interchangeable modules from the Minigrid™ range.

These non-furnished 1 & 2 gang plates offer the installer unprecedented flexibility in creating customised switch arrangements. A simple single screw fixing secures the required modules in position. A host of switching options can be achieved by selecting from our range of interchangeable modules.



All Define® switch plates are modular as standard, allowing you create create virtually any switch plate you require e.g. Two way switch next to an intermediate switch (shown above).

Modular Ingot Plate Switches
Dimmer Switches | Toggle Switches



411



412



413



414



416

MINIGRID® For interchangeable MiniGrid™ modules - see page j18.

Ingot Plates Switches - MiniGrid™

411	10AX Ingot 1 Gang 2 Way Plate Switch
412	10AX Ingot 2 Gang 2 Way Plate Switch
413	10AX Ingot 3 Gang 2 Way Plate Switch
414	10AX Ingot 4 Gang 2 Way Plate Switch
416	10AX Ingot 6 Gang 2 Way Plate Switch

Define® plates are coated stainless steel

Ingot Plates Switches - MiniGrid™

425	10AX Ingot 1 Gang Intermediate Plate Switch

Standards: BS EN 60669
Back Box Depth: 16mm Minimum **Cable Size:** 4 x 1.5mm² / 2 x 2.5mm² / 1 x 6mm² Maximum
Dimensions: **1 Gang:** (88mm x 88mm x 1.3mm*), **2 Gang:** (146mm x 88mm x 1.3mm*) *Excluding gasket

Understanding the code:
FP - Plate Style **BN** - Plate Finish **411** - Product No. **BK** - Insert Colour.
BS Brushed Stainless, **BN** Black Nickel , **PN** Pearl Nickel, **CH** Polished Chrome and **SS** Stainless Steel



401



402



403



404



406



426

MINIGRID® For MiniGrid™ modules - see page j18

Unfurnished Plates - MiniGrid™

401	1 Gang MiniGrid™ Unfurnished Plate - 1 Aperture
402	1 Gang MiniGrid™ Unfurnished Plate - 2 Apertures
403	1 Gang MiniGrid™ Unfurnished Plate - 3 Apertures
404	2 Gang MiniGrid™ Unfurnished Plate - 2 x 2 Apertures
406	2 Gang MiniGrid™ Unfurnished Plate - 2 x 3 Apertures
426	2 Gang MiniGrid™ Unfurnished Plate - 6 In-Line Apertures

Dimensions: 1 Gang: (88mm x 88mm x 1.3mm*), **2 Gang:** (146mm x 88mm x 1.3mm*) *Excluding gasket

Understanding the code:
FP - Plate Style **BN** - Plate Finish **411** - Product No. **BK** - Insert Colour.
BS Brushed Stainless, **BN** Black Nickel , **PN** Pearl Nickel, **CH** Polished Chrome and **SS** Stainless Steel



140



152



153



154

MINIGRID® Interchangeable modules available on page j36

Dimmer Switches

140	1 Gang 2 Way 400Va Dimmer Switch
152	2 Gang 2 Way 400Va Dimmer Switch
153	3 Gang 2 Way 400Va Dimmer Switch
154	4 Gang 2 Way 400Va Dimmer Switch

We recommend the use of branded halogen lamps with all Define® dimmers. The use of inferior, non-branded lamps may require the nominal rating of the dimmer to be reduced. These dimmer switches have not been designed for use with LED lamps. However, they may be suitable for some good quality LED lamps. For further information please contact the Click® technical support team.

Standards: BS EN 60669, BS EN 55015 **Type:** Leading Edge
Back Box Depth: 35mm Minimum **Cable Size:** 2 x 1.5mm²
Dimensions: **1 Gang:** (88mm x 88mm x 1.3mm*), **2 Gang:** (146mm x 88mm x 1.3mm*) *Excluding gasket

Understanding the code:
FP - Plate Style **BN** - Plate Finish **411** - Product No. **Please note:** Supplied with both black & white gaskets (**BN** supplied with black gaskets only).
BS Brushed Stainless, **BN** Black Nickel , **PN** Pearl Nickel, **CH** Polished Chrome and **SS** Stainless Steel



140PL



152PL



SP900



MD9014



153PL



154PL



185



186

The dimmer modules are supplied separately to the plates listed above.
140PL, 152PL, 153PL & 154PL are only available in (CH) & (BS) finishes.

Dimmer Modules

MD9001	6A 2 Way Push On/Off (Non-Dimming) Module (25 x 62mm)
MD9010	1-10V Analogue Dimmer Module (25 x 62mm)
MD9022	250W 2 Way Dimmer Module (25 x 62mm)
MD9042	400W 2 Way Dimmer Module (25 x 62mm)
MD9014	100W Dual Mode Dimmer Module with Trim (26.5 x 55mm)

Dimmer Mounting Unfurnished Plates

140PL	1 Gang Dimmer Plate & Knob (650W Max) - 1 Aperture
152PL	2 Gang Dimmer Plate & Knobs (800W Max) - 2 Apertures
153PL	3 Gang Dimmer Plate & Knobs (1200W Max) - 3 Apertures
154PL	4 Gang Dimmer Plate & Knobs (1600W Max) - 4 Apertures
185	1 Gang Dimmer Plate & Knob (1000W Max) - 1 Aperture
186	2 Gang Dimmer Plate & Knobs (1630W Max) - 2 Apertures
SP900	Dimmer M10 Nut Runner Tool

Use the nut runner to easily exchange dimmer modules and create customised dimmer switch plate.

Maximum Wattage: 1 Gang: 1000W, **2 Gang:** 1630W
Back Box Depth: Up to 400W: 35mm
Dimensions: 1 Gang: (88mm x 88mm x 1.3mm*), **2 Gang:** (146mm x 88mm x 1.3mm*) *Excluding gasket

Understanding the code:
FP - Plate Style **BN** - Plate Finish **411** - Product No. **Please note:** Supplied with both black & white gaskets (**BN** supplied with black gaskets only).
BS Brushed Stainless, **BN** Black Nickel , **PN** Pearl Nickel, **CH** Polished Chrome and **SS** Stainless Steel



421



MD9125



422



423



424

Brushed Stainless plate finishes require the use of a Pearl Nickel (PN) Toggle Switch Module.

Toggle Switches

421	10AX 1 Gang 2 Way Toggle Switch
422	10AX 2 Gang 2 Way Toggle Switch
423	10AX 3 Gang 2 Way Toggle Switch
424	10AX 4 Gang 2 Way Toggle Switch

10AX Intermediate Toggle Switch Modules

MD9125BN	Intermediate Toggle Switch Module - Black Nickel
MD9125CH	Intermediate Toggle Switch Module - Polished Chrome
MD9125PN	Intermediate Toggle Switch Module - Pearl Nickel

Not interchangeable with dimmers or other Minigrid™ modules.

Standards: BS EN 60669
Back Box Depth: 35mm Minimum **Cable Size:** 2 x 2.5mm² / 4x 1.5mm²
Dimensions: **1 Gang:** (88mm x 88mm x 1.3mm*), **2 Gang:** (146mm x 88mm x 1.3mm*) *Excluding gasket

Understanding the code:
FP - Plate Style **BN** - Plate Finish **411** - Product No. **Please note:** Supplied with both black & white gaskets (**BN** supplied with black gaskets only).
BS Brushed Stainless, **BN** Black Nickel , **PN** Pearl Nickel, **CH** Polished Chrome and **SS** Stainless Steel

Power Socket Outlets, Fused Connection Units & Control Switches

With the ever increasing demand for power supplies in all areas of the home comes the problem of selecting and fitting outlets which blend harmoniously with the décor of the room in which they are to be fitted.

The 5 different Define® plate finishes offer a solution for almost every possible design need and will enhance the décor of any area whether in a kitchen, bedroom, lounge or study etc...



13A Wall Socket Outlets | Wall Socket Outlets Round Pin | Fused Connection Units Fan Isolation Switches | DP Switches



535



536



1535



1536



1836

Ingot Switched Socket Outlets

535 13A Ingot 1 Gang DP Switched Socket
536 13A Ingot 2 Gang DP Switched Socket
1535 1 Gang 13A DP 3 Pin Safety Shutter Switched Socket Outlet
1536 2 Gang 13A DP 3 Pin Safety Shutter Switched Socket Outlet - Twin Earth

Ingot Switched Safety Shutter Socket Outlets With Outboard Rockers

1836 2 Gang 13A DP 3 Pin Safety Shutter Outboard Switched Socket Outlet - Twin Earth

Standards: BS 1363 **Cable Size:** 4 x 2.5mm² / 2 x 4mm²
Back Box Depth: 35mm Minimum
Dimensions: **1 Gang:** (88mm x 88mm x 1.3mm*), **2 Gang:** (146mm x 88mm x 1.3mm*) *Excluding gasket

Understanding the code:
FP - Plate Style **BN** - Plate Finish **411** - Product No. **BK** - Insert Colour.
BS Brushed Stainless, **BN** Black Nickel , **PN** Pearl Nickel, **CH** Polished Chrome and **SS** Stainless Steel



655



570



580



571U



038



039

Ingot Switched Sockets With USB Outlet

571U 13A Ingot 1 Gang Switched Socket With 2.1A USB Outlet
570 13A Ingot 2 Gang Switched Sockets With 2.1A USB Outlet (Twin Earth)
580 13A Ingot 2 Gang Switched Socket With Twin 2.1A USB Outlets (4.2A) (Twin Earth)

Round Pin Socket Outlets

038 5A Round Pin Socket
039 2A Round Pin Socket

Lockable Sockets

655 13A Ingot 1 Gang DP Key Lockable Socket With Neon

Standards: BS 1363 **038, 039:** BS 546 **570, 571U, 580:** BS1363-2, BS EN 62368-1, BS EN 62680-1-1 **655:** BS EN 60669-1, BS1363-2
Cable Size: 2A,5A: 2x 2.5mm² / 3 x 1.5mm², **13A:** 4 x 2.5mm² / 2 x 4mm² **655:** 3 x 2.5mm², 2 x 4mm²
Back Box Depth: 038, 039: 25mm Minimum, **535, 536, 570:** 35mm Minimum, **571U, 655:** 47mm Minimum.
Dimensions: 1 Gang: (88mm x 88mm x 1.3mm*), **2 Gang:** (146mm x 88mm x 1.3mm*) *Excluding gasket

Understanding the code:
FP - Plate Style **BN** - Plate Finish **411** - Product No. **BK** - Insert Colour.
BS Brushed Stainless, **BN** Black Nickel , **PN** Pearl Nickel, **CH** Polished Chrome and **SS** Stainless Steel



550



551



552



553



750



751



752



753

Ingot Fused Connection Units With Optional Flex Outlet

550	13A Ingot Fused Connection Unit
551	13A Ingot DP Switched Fused Connection Unit
552	13A Ingot DP Switched Fused Connection Unit With Neon
553	13A Ingot Fused Connection Unit With Neon

Ingot Fused Connection Units Without Flex Outlet

750	13A Ingot Fused Connection Unit
751	13A Ingot DP Switched Fused Connection Unit
752	13A Ingot DP Switched Fused Connection Unit With Neon
753	13A Ingot Fused Connection Unit With Neon

Standards: BS 1363 and BS 1362 (fuse)
Back Box Depth: 35mm Minimum **Cable Size:** 3 x 2.5mm² or 2 x 4mm²
Dimensions: **1 Gang:** (88mm x 88mm x 1.3mm*), **2 Gang:** (146mm x 88mm x 1.3mm*) *Excluding gasket

Understanding the code:
FP - Plate Style **BN** - Plate Finish **411** - Product No. **BK** - Insert Colour.
BS Brushed Stainless, **BN** Black Nickel , **PN** Pearl Nickel, **CH** Polished Chrome and **SS** Stainless Steel



200



201



202



204



205



203

45A Switches And Socket Outlets

200	45A 1 Gang DP Switch
201	45A 1 Gang DP Switch With Neon
202	45A 2 Gang DP Switch
203	45A 2 Gang DP Switch With Neon
204	45A 2 Gang DP Switch With 13A DP Switched Socket
205	45A 2 Gang DP Switch With 13A DP Switched Socket & Neons

Standards: BS EN 60669, BS 4177
Back Box Depth: 47mm Minimum **Cable Size: 45A:** 1 x 16mm²
Dimensions: 1 Gang: (88mm x 88mm x 1.3mm*), **2 Gang:** (146mm x 88mm x 1.3mm*) *Excluding gasket

Understanding the code:
FP - Plate Style **BN** - Plate Finish **411** - Product No. **BK** - Insert Colour.
BS Brushed Stainless, **BN** Black Nickel , **PN** Pearl Nickel, **CH** Polished Chrome and **SS** Stainless Steel



500



501



502



504



505



503

Ingot 45A Switches And Socket Outlets

500	45A Ingot 1 Gang DP Switch
501	45A Ingot 1 Gang DP Switch With Neon
502	45A Ingot 2 Gang DP Switch
503	45A Ingot 2 Gang DP Switch With Neon
504	45A Ingot 2 Gang DP Switch With 13A DP Switched Socket
505	45A Ingot 2 Gang DP Switch With 13A DP Switched Socket & Neons

Standards: BS EN 60669, BS 4177
Back Box Depth: 47mm Minimum **Cable Size: 45A:** 1 x 16mm²
Dimensions: 1 Gang: (88mm x 88mm x 1.3mm*), **2 Gang:** (146mm x 88mm x 1.3mm*) *Excluding gasket

Understanding the code:
FP - Plate Style **BN** - Plate Finish **411** - Product No. **BK** - Insert Colour.
BS Brushed Stainless, **BN** Black Nickel , **PN** Pearl Nickel, **CH** Polished Chrome and **SS** Stainless Steel



520



522



523



660



722



723

Ingot Fan Isolation Switch

520 10A Ingot 3 Pole Fan Isolation Plate Switch

This product is not modular

Lockable Switches

660 20A Double Pole Key Lockable Switch

Ingot 20A Control Switches With Optional Flex Outlet

522 20A Ingot DP Switch

523 20A Ingot DP Switch With Neon

Ingot 20A Control Switches Without Flex Outlet

722 20A Ingot DP Switch

723 20A Ingot DP Switch With Neon

3 pole and 20A DP switches are non-modular

Standards: BS EN 60669 **660:** BS EN 60669-1 **Back Box Depth:** 35mm Minimum **660:** 47mm Minimum
Cable Size: 1 x 2.5mm² / 2 x 1.5mm² **20A:** 1 x 10mm² / 4 x 2.5mm² **660:** 3 x 2.5mm2, 2 x 4mm2
Dimensions: 1 Gang: (88mm x 88mm x 1.3mm*), **2 Gang:** (146mm x 88mm x 1.3mm*) *Excluding gasket

Understanding the code:
FP - Plate Style **BN** - Plate Finish **411** - Product No. **BK** - Insert Colour.
BS Brushed Stainless, **BN** Black Nickel , **PN** Pearl Nickel, **CH** Polished Chrome and **SS** Stainless Steel



100



060



061

Blank Plates

060 1 Gang Blank Plate

061 2 Gang Blank Plate

All blank plates supplied with black and white gaskets where applicable.

Dual Voltage Shaver Socket

100 115/230V Dual Voltage Shaver Socket

Click® dual voltage shaver outlets incorporate a double wound isolating transformer rated 20Va at 230V or 115V and meets BS EN 61558-2-5: 1998 making it safe for use in bathrooms.

Shaver outlet is not continuously rated and therefore not suitable for use as a permanent charging outlet.

Standards: 100: BS EN 61558
Back Box Depth: 100: 47mm min. **Cable Size: 100:** 2 x 1.5mm² / 1 x 2.5mm²
Dimensions: 1 Gang: (88mm x 88mm x 1.3mm*), **2 Gang:** (146mm x 88mm x 1.3mm*) *Excluding gasket

Understanding the code:
FP - Plate Style **BN** - Plate Finish **411** - Product No. **BK** - Insert Colour.
BS Brushed Stainless, **BN** Black Nickel , **PN** Pearl Nickel, **CH** Polished Chrome and **SS** Stainless Steel

TV, Telephone & Data Sockets

The following pages contain details of Define® products designed to deal with handling data and media transfer through telephone, computer, TV or radio. As well as the finished products please also find details of unfurnished mounting plates designed to accept custom selections of New Media™ modules from our dedicated modules section.

RJ11 Outlet | UK Telephone Outlets
Satellite Socket Outlets | Coaxial Sockets







115



120 / 125



121 / 126

RJ11 Telephone Outlet

115 Single RJ11 (Irish/US) Outlet

Telephone Outlets

120 Single Telephone Outlet - Master
121 Twin Telephone Outlet - Master
125 Single Telephone Outlet - Secondary
126 Twin Telephone Outlet - Secondary

Twin outlets are 2 separate sockets and not internally linked together.

Back Box Depth: 25mm Minimum **115:** 35mm Minimum **Termination Type:** IDC
Dimensions: 1 Gang: (88mm x 88mm x 1.3mm*) *Excluding gasket

Understanding the code:
FP - Plate Style **BN** - Plate Finish **411** - Product No. **BK** - Insert Colour.
BS Brushed Stainless, **BN** Black Nickel , **PN** Pearl Nickel, **CH** Polished Chrome and **SS** Stainless Steel



156



157



158



159

Satellite Outlets (Unshielded)

156 Non-Isolated Single Satellite Outlet

157 Isolated Satellite & Isolated Coaxial Outlet

Isolated outlets will filter out any interference, if a 2 way signal is required, i.e. for use with satellite hard wire extensions, then a non-isolated outlet is required.

Non-Isolated Coaxial Outlets (Unshielded)

065 Single Coaxial Outlet

066 Twin Coaxial Outlet

Isolated Coaxial Outlets (Unshielded)

158 Single Isolated Coaxial Outlet

159 Twin Isolated Coaxial Outlet

Back Box Depth: 25mm Minimum
Dimensions: 1 Gang: (88mm x 88mm x 1.3mm*) *Excluding gasket

Understanding the code:
FP - Plate Style **BN** - Plate Finish **411** - Product No. **BK** - Insert Colour.
BS Brushed Stainless, **BN** Black Nickel , **PN** Pearl Nickel, **CH** Polished Chrome and **SS** Stainless Steel




311



312



310



MM410BK MM405WH MM501BK MM440BK

new media™

See our dedicated New Media™ section for more information on the range of New Media™ modules available.

Unfurnished Plates - New Media™

310 1 Gang New Media™ Unfurnished Plate - 1 Aperture
311 1 Gang New Media™ Unfurnished Plate - 2 Apertures
312 2 Gang New Media™ Unfurnished Plate - 4 Apertures

All plates supplied with black and white gaskets where applicable. †Excludes BN Finish

Selecting from a range of module inserts covering all manner of media transfer, the installer will now be able to configure their own arrangement of TV, radio or satellite reception, plus speaker, telephone and data outlets. All modules can be inserted into single or double wall plates, fitted onto standard switch and socket boxes.

Back Box Depth: Dependant on module used
Dimensions: **1 Gang:** (88mm x 88mm x 1.3mm*), **2 Gang:** (146mm x 88mm x 1.3mm*) *Excluding gasket

Understanding the code:
FP - Plate Style **BS** - Plate Finish **310** - Product No.
BS Brushed Stainless, **BN** Black Nickel , **PN** Pearl Nickel, **CH** Polished Chrome and **SS** Stainless Steel



WA092



SP640



WA094



WA095



WA099



WA102

essentials™

For the complete range of back boxes see Essentials™ page m4.

Galvanised Steel Back Boxes

WA092	1 Gang 16mm Deep Galvanised Steel K.O. Box
WA093	1 Gang 25mm Deep Galvanised Steel K.O. Box
WA094	2 Gang 25mm Deep Galvanised Steel K.O. Box
WA095	1 Gang 35mm Deep Galvanised Steel K.O. Box
WA096	2 Gang 35mm Deep Galvanised Steel K.O. Box
WA097	1 Gang 47mm Deep Galvanised Steel K.O. Box
WA098	2 Gang 47mm Deep Galvanised Steel K.O. Box
WA099	1 + 1 35mm Deep Dual Accessory Box
WA102	1 + 2 35mm Deep Dual Accessory Box

Longer Fixing Screws

SP640BN	Define® 3.5mm Dia. 40mm Long Screws (Bag 100)
SP640CH	Define® 3.5mm Dia. 40mm Long Screws (Bag 100)
SP622	Define® M3.5 Security Screw 22mm Long (Bag 100)
SP623	Standard M3.5 Security Screw 50mm Long (Bag 100)

SP622 and SP623 Require 2mm security allen key/driver.




WA106P



WA107P



GA100



WA4135



WA4247

essentials™

For the complete range of back boxes see Essentials™ page m7.

Dry Lining Boxes

WA087P	1 Gang 35mm Deep Dry Lining Box
WA088P	2 Gang 35mm Deep Dry Lining Box
WA106P	1 Gang 47mm Deep Dry Lining Box
WA107P	2 Gang 47mm Deep Dry Lining Box
WA108P	Round Ceiling 34mm Deep Dry Lining Box

FlameGuard® Dry Lining Boxes

WA4135	1 Gang 35mm Deep FlameGuard® Dry Lining Box
WA4235	2 Gang 35mm Deep FlameGuard® Dry Lining Box
WA4147	1 Gang 47mm Deep FlameGuard® Dry Lining Box
WA4247	2 Gang 47mm Deep FlameGuard® Dry Lining Box

'Ezylink' Dry Lining Box Connector

GA100	'Ezylink' Dry Lining Box Connector

FlameGuard® back boxes have been tested and conform to both fire and acoustic BS EN standards. Fire: BS EN 1363-1: 1999 & BS EN 1364-1: 1999 Acoustic: BS EN ISO 140-3: 1995 & BS EN ISO 717-1: 1997. Complies with Building Regulations
Fire tested up to 90 minutes with the capability of the boxes being mounted back to back.

definity™

Screwless Wiring Accessories





definity™

The Screwless Range

Contents

Product Complete Design

Switches	**e6**
Power Socket Outlets	**e12**
Fused Connection Units	**e14**
Control Switches	**e20**
45A Switches	**e18**
Socket & Blank Plates	**e23**
Telephone & Data Sockets	**e26**
Satellite & Coaxial Outlets	**e27**
New Media™ Plates	**e28**

Components Listing

Switches	**e30**
Switches & Blank Plates	**e37**
Socket Outlets	**e38**
Fused Connection Units	**e42**
Red Fused Connection Units	**e46**
45A Switches	**e47**
RJ11 Outlet	**e48**
UK Telephone Outlet	**e49**
Satellite & Coaxial Outlets	**e50**
New Media™ Plates	**e52**
Galvanised Boxes	**e53**
Dry Lining Boxes	**e54**



Definity™ unique product codes

When ordering either an insert or cover plate from this catalogue, please specify a unique product code as shown. For example if you wish to order a 2 gang 13A switched socket in stainless steel with a black switch and insert, the unique product code for the insert will be SIN036BK and for the cover plate will be SCP436SS.

If a 2 gang 13A switched socket in stainless steel with a stainless steel ingot switch and black insert is preferred, the unique product code for the insert will be SIN536BKSS and for the cover plate will be SCP436SS.

SIN	036	BK	SS
Definity™ insert prefix	Product Number	Insert Colour	'INGOT' switch finish (if applicable)

SCP	436	SS
Definity™ cover plate prefix	Product Number	Product Colour

The smooth, clean lines of Definity™ products provide the ultimate finishing touch to a feature packed range of decorative domestic electrical accessories.

Definity™ has evolved from our well established Define® flat plate accessory range and features all of the same attributes including modular switching but without the visible fixing screws.

Definity™ goes one stage further by incorporating screwless, push-fit face plates in 6 assorted finishes. The face plates are supplied independently of the electrical inserts which means that the initial installation of the product can be carried out and any subsequent maintenance or decoration completed before the final selection and fixing of the face plate.

For the installer, this means a greater degree of flexibility in the timing of the installation of the insert and the distributor need not carry excessive levels of costly finished product. Furthermore should subsequent interior design change or re-decoration dictate that a different colour accessory be required to complement the new scheme, replacement plates can be sourced individually and fitted without the need for any special tools or electrical skills.

Each Definity™ product comprises an insert and a decorative cover plate. Plates are available in 6 different finishes as detailed in this catalogue and as illustrated below.

*UK Design Registration 3015621



Insert | Red (RD) | White (PW) | Stainless Steel (SS) | *Brushed Stainless (BS) | Polished Chrome (CH) | Matt Black (BK)

Simply select the required insert and choice of cover plate finish.






Switches

The range of Definity™ modular switches comprises of both moulded black or white switches as well as metallic finished ‘Ingot’ switches, which features a simple single screw fixing to the insert.

The modular Minigrid™ format is fitted as standard and is enhanced by the availability of multi-functional and fully interchangeable modules which also includes ‘Ingot’ finishes through the range.

The unfurnished single and double plates offer the installer unprecedented flexibility in creating customised wiring solutions.



All Definity™ switch plates are modular as standard, allowing you to create virtually any switch plate you require e.g. Two way switch next to an intermediate switch (shown above).

Modular Switches | Rotary Dimmer Switches
Toggle Switches | Control Switches

MINIGRID®



The rotary dimmer switches are interchangeable with the use of our M10 nut runner tool. There are a host of alternative dimmer modules and plates available, see page j37.



Traditional toggle switches are also listed with an intermediate single switch plate option.
The 2 way toggle switch is interchangeable with the intermediate toggle module.



For details of the complete Minigrid™ range of modules, please refer to our dedicated Minigrid™ section.



Simple, single screw or snap fit installation of the modules on the mounting plates has encouraged contractors to devise and install customised switching solutions on-site.

Definity™ plates are coated stainless steel, available in the following finishes: Brushed Stainless (BS), Polished Chrome (CH) and Stainless Steel (SS). White (PW) & Black (BK) are also available, produced from polycarbonate.
Understanding the code:
SIN - Insert Prefix **036** - Product No **BK** - Insert Colour **SS** - 'INGOT' Switch Finish (if applicable).
SCP - Definity™ Cover Plate Prefix **436** - Product No **SS** - Plate Colour. PW and BK are also available, produced from polycarbonate.
BS Brushed Stainless, **CH** Polished Chrome, **SS** Stainless Steel, **PW** White, **BK** Black



SIN011, SIN025 SCP401



SIN012 SCP402



SIN013 SCP403



SIN019 SCP404



SIN105 SCP406

DEFINITY™ PLATES ARE MADE UP OF 2 COMPONENTS (INSERT & COVER PLATE)
Please select one of each component: Choose Insert (Blue Code) then Choose Cover Plate (Orange Code)

1 Gang Intermediate Switch Insert

SIN025 10AX 1 Gang Intermediate Switch Insert

2 Way Switch Inserts

SIN011 10AX 1 Gang 2 Way Switch Insert
SIN012 10AX 2 Gang 2 Way Switch Insert
SIN013 10AX 3 Gang 2 Way Switch Insert
SIN019 10AX 4 Gang 2 Way Switch Insert
SIN105 10AX 6 Gang 2 Way Switch Insert

MiniGrid™ Cover Plates

SCP401 1 Gang MiniGrid™ Cover Plate - 1 Aperture

MiniGrid™ Cover Plates

SCP401 1 Gang MiniGrid™ Cover Plate - 1 Aperture
SCP402 1 Gang MiniGrid™ Cover Plate - 2 Apertures
SCP403 1 Gang MiniGrid™ Cover Plate - 3 Apertures
SCP404 2 Gang MiniGrid™ Cover Plate - 2 x 2 Apertures
SCP406 2 Gang MiniGrid™ Cover Plate - 2 x 3 Apertures

Standards: BS EN 60669
Back Box Depth: 25mm Minimum **Cable Size:** 4 x 1.5mm² / 2 x 2.5mm² / 1 x 6mm² Maximum
Dimensions: **1 Gang:** (86mm x 86mm x 4mm), **2 Gang:** (146mm x 86mm x 4mm)

Understanding the code:
SIN - Insert Prefix **036** - Product No **BK** - Insert Colour **SS** - 'INGOT' Switch Finish (if applicable).
SCP - Definity™ Cover Plate Prefix **436** - Product No **SS** - Plate Colour. PW and BK are also available, produced from polycarbonate.
BS Brushed Stainless, **CH** Polished Chrome, **SS** Stainless Steel, **PW** White, **BK** Black



SIN411, SIN425 **SCP401**



SIN412 **SCP402**



SIN413 **SCP403**



SIN414 **SCP404**



SIN416 **SCP406**

DEFINITY™ PLATES ARE MADE UP OF 2 COMPONENTS (INSERT & COVER PLATE)
Please select one of each component: Choose Insert **(Blue Code)** then Choose Cover Plate **(Orange Code)**

Ingot 1 Gang Intermediate Switch Insert

SIN425 10AX Ingot 1 Gang Intermediate Switch Insert

Ingot 2 Way Switch Inserts

SIN411 10AX Ingot 1 Gang 2 Way Switch Insert
SIN412 10AX Ingot 2 Gang 2 Way Switch Insert
SIN413 10AX Ingot 3 Gang 2 Way Switch Insert
SIN414 10AX Ingot 4 Gang 2 Way Switch Insert
SIN416 10AX Ingot 6 Gang 2 Way Switch Insert

MiniGrid™ Cover Plates

SCP401 1 Gang MiniGrid™ Cover Plate - 1 Aperture

MiniGrid™ Cover Plates

SCP401 1 Gang MiniGrid™ Cover Plate - 1 Aperture
SCP402 1 Gang MiniGrid™ Cover Plate - 2 Apertures
SCP403 1 Gang MiniGrid™ Cover Plate - 3 Apertures
SCP404 2 Gang MiniGrid™ Cover Plate - 2 x 2 Apertures
SCP406 2 Gang MiniGrid™ Cover Plate - 2 x 3 Apertures

Standards: BS EN 60669
Back Box Depth: 25mm Minimum **Cable Size:** 4 x 1.5mm² / 2 x 2.5mm² / 1 x 6mm² Maximum
Dimensions: **1 Gang:** (86mm x 86mm x 4mm), **2 Gang:** (146mm x 86mm x 4mm)

Understanding the code:
SIN - Insert Prefix **036** - Product No **BK** - Insert Colour **SS** - 'INGOT' Switch Finish (if applicable).
SCP - Definity™ Cover Plate Prefix **436** - Product No **SS** - Plate Colour. PW and BK are also available, produced from polycarbonate.
BS Brushed Stainless, **CH** Polished Chrome, **SS** Stainless Steel, **PW** White, **BK** Black



SIN401 SCP401



SIN402 SCP402



SIN403 SCP403



SIN406 SCP406



SIN426 SCP426

MINIGRID® For details of the complete range of modules please refer to our dedicated Minigrid™ section.

MiniGrid™ Unfurnished Plate Inserts

SIN401 1 Gang MiniGrid™ Unfurnished Plate Insert - 1 Aperture
SIN402 1 Gang MiniGrid™ Unfurnished Plate Insert - 2 Apertures
SIN403 1 Gang MiniGrid™ Unfurnished Plate Insert - 3 Apertures
SIN404 2 Gang MiniGrid™ Unfurnished Plate Insert - 2 x 2 Apertures
SIN406 2 Gang MiniGrid™ Unfurnished Plate Insert - 2 x 3 Apertures
SIN426 2 Gang MiniGrid™ Unfurnished Plate Insert - 6 In-Line Apertures

MiniGrid™ Cover Plates

SCP401 1 Gang MiniGrid™ Cover Plate - 1 Aperture
SCP402 1 Gang MiniGrid™ Cover Plate - 2 Apertures
SCP403 1 Gang MiniGrid™ Cover Plate - 3 Apertures
SCP404 2 Gang MiniGrid™ Cover Plate - 2 x 2 Apertures
SCP406 2 Gang MiniGrid™ Cover Plate - 2 x 3 Apertures
SCP426 2 Gang MiniGrid™ Cover Plate - 6 In-Line Apertures

DEFINITY™ PLATES ARE MADE UP OF 2 COMPONENTS (INSERT & COVER PLATE)

Please select one of each component:
Choose Insert (Blue Code)
then Choose Cover Plate (Orange Code)

Back Box Depth: Dependant on modules used **Dimensions: 1 Gang:** (86mm x 86mm x 4mm), **2 Gang:** (146mm x 86mm x 4mm)

Understanding the code:
SIN - Insert Prefix **036** - Product No **BK** - Insert Colour **SS** - 'INGOT' Switch Finish (if applicable).
SCP - Definity™ Cover Plate Prefix **436** - Product No **SS** - Plate Colour. PW and BK are also available, produced from polycarbonate.
BS Brushed Stainless, **CH** Polished Chrome, **SS** Stainless Steel, **PW** White, **BK** Black



SIN140, SIN141, SIN141PL
SCP241



SIN142, SIN142PL
SCP242



SP900



MD9014



SIN143, SIN143PL SCP243



SIN144, SIN144PL SCP244

DEFINITY™ PLATES ARE MADE UP OF 2 COMPONENTS (INSERT & COVER PLATE)
Please select one of each component: Choose Insert **(Blue Code)** then Choose Cover Plate **(Orange Code)**

Rotary Dimmer Switch Inserts - Push On/Off

SIN140 1 Gang 2 Way 400Va Dimmer Switch Insert
SIN141 1 Gang 2 Way 250Va Dimmer Switch Insert
SIN142 2 Gang 2 Way 250Va Dimmer Switch Insert
SIN143 3 Gang 2 Way 250Va Dimmer Insert
SIN144 4 Gang 2 Way 250Va Dimmer Insert

Dimmer Switch Cover Plate & Dimmer Knob

SCP241 1 Gang Dimmer Switch Cover Plate
SCP241 1 Gang Dimmer Switch Cover Plate
SCP242 2 Gang Dimmer Switch Cover Plate
SCP243 3 Gang Dimmer Switch Cover Plate
SCP244 4 Gang Dimmer Switch Cover Plate

Rotary Dimmer Mounting Plates Inserts

SIN141PL 1 Gang Unfurnished Dimmer Switch Insert - 1 Aperture
SIN142PL 2 Gang Unfurnished Dimmer Switch Insert - 2 Apertures
SIN143PL 3 Gang Unfurnished Dimmer Switch Insert - 3 Apertures
SIN144PL 4 Gang Unfurnished Dimmer Switch Insert - 4 Apertures

The dimmer modules are supplied separately to the plates listed above.

SP900 Dimmer M10 Nut Runner Tool

Use the nut runner to easily exchange dimmer modules and create customised dimmer switch plate.

Dimmer Modules

MD9001 6A 2 Way Push On/Off (Non-Dimming) Module (25 x 62mm)
MD9010 1-10V Analogue Dimmer Module (25 x 62mm)
MD9022 250W 2 Way Dimmer Module (25 x 62mm)
MD9042 400W 2 Way Dimmer Module (25 x 62mm)
MD9014 100W Dual Mode Dimmer Module with Trim (26.5 x 55mm)

Standards: BS EN 60669, BS EN 55015 **Type:** Leading Edge, **MD9014:** Leading & Trailing Edge
Back Box Depth: 35mm **Cable Size:** 2 x 1.5mm²
Dimensions: **1 Gang:** (86mm x 86mm x 4mm), **2 Gang:** (146mm x 86mm x 4mm)

Understanding the code:
SIN - Insert Prefix **036** - Product No **BK** - Insert Colour **SS** - 'INGOT' Switch Finish (if applicable).
SCP - Definity™ Cover Plate Prefix **436** - Product No **SS** - Plate Colour. PW and BK are also available, produced from polycarbonate.
BS Brushed Stainless, **CH** Polished Chrome, **SS** Stainless Steel, **PW** White, **BK** Black



SIN420, SIN421 SCP221



SIN422 SCP222



SIN423 SCP223



SIN424 SCP224

10AX Intermediate Toggle Switch Modules

MD9125 10AX Intermediate Toggle Switch Module

Plate Finish	Module Finish
Chrome	CH - Chrome
Stainless Steel & Brushed Stainless	PN - Pearl Nickel



MD9125

DEFINITY™ PLATES ARE MADE UP OF 2 COMPONENTS (INSERT & COVER PLATE)

Please select one of each component:
Choose Insert (Blue Code)
then Choose Cover Plate (Orange Code)

1 Gang Intermediate Toggle Switch Insert

SIN420 10AX 1 Gang Intermediate Toggle Switch Insert

2 Way Toggle Switch Inserts

SIN421 10AX 1 Gang 2 Way Toggle Switch Insert
SIN422 10AX 2 Gang 2 Way Toggle Switch Insert
SIN423 10AX 3 Gang 2 Way Toggle Switch Insert
SIN424 10AX 4 Gang 2 Way Toggle Switch Insert

Toggle Switch Cover Plates

SCP221 1 Gang Toggle Switch Cover Plate

Toggle Switch Cover Plates

SCP221 1 Gang Toggle Switch Cover Plate
SCP222 2 Gang Toggle Switch Cover Plate
SCP223 3 Gang Toggle Switch Cover Plate
SCP224 4 Gang Toggle Switch Cover Plate

Standards: BS EN 60669
Back Box Depth: 35mm Minimum **Cable Size:** 2 x 2.5mm² / 4 x 1.5mm²
Dimensions: **1 Gang:** (86mm x 86mm x 4mm), **2 Gang:** (146mm x 86mm x 4mm)

Understanding the code:
SIN - Insert Prefix **036** - Product No **BK** - Insert Colour **SS** - 'INGOT' Switch Finish (if applicable).
SCP - Definity™ Cover Plate Prefix **436** - Product No **SS** - Plate Colour. PW and BK are also available, produced from polycarbonate.
BS Brushed Stainless, **CH** Polished Chrome, **SS** Stainless Steel, **PW** White, **BK** Black

Power Socket Outlets, Fused Connection Units & Control Switches

With the ever increasing demand for power supplies in all areas of the home comes the problem of selecting and fitting outlets which blend harmoniously with the décor of the room in which they are to be fitted.

The 5 different Definity™ plate finishes offer a solution for almost every possible design need and will enhance the décor of any area whether in a kitchen, bedroom, lounge or study etc...

13A Wall Socket Outlets | Round Pin
Wall Socket Outlets | Fused Connection Units
Fan Isolation Switches | DP Switches






SIN630 SCP430



SIN035 SCP435



SIN535 SCP435

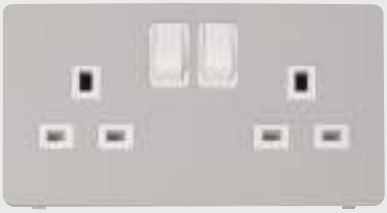

SIN036 SCP436



SIN536 SCP436

DEFINITY™ PLATES ARE MADE UP OF 2 COMPONENTS (INSERT & COVER PLATE)
Please select one of each component: Choose Insert (Blue Code) then Choose Cover Plate (Orange Code)

Socket Inserts

SIN630	13A 1 Gang Socket Insert (Twin Earth)
SIN035	13A 1 Gang DP Switched Socket Insert
SIN535	13A Ingot 1 Gang DP Switched Socket Insert
SIN036	13A 2 Gang DP Switched Socket Insert
SIN536	13A Ingot 2 Gang DP Switched Socket Insert

Socket Cover Plates

SCP430	13A 1 Gang Socket Cover Plate
SCP435	13A 1 Gang Switched Socket Cover Plate
SCP435	13A 1 Gang Switched Socket Cover Plate
SCP436	13A 2 Gang Switched Socket Cover Plate
SCP436	13A 2 Gang Switched Socket Cover Plate

Standards: BS1363,
Back Box Depth: 35mm Minimum **Cable Size:** 4 x 2.5mm² / 2 x 4mm²
Dimensions: **1 Gang:** (86mm x 86mm x 4mm), **2 Gang:** (146mm x 86mm x 4mm)

Understanding the code:
SIN - Insert Prefix **036** - Product No **BK** - Insert Colour **SS** - 'INGOT' Switch Finish (if applicable).
SCP - Definity™ Cover Plate Prefix **436** - Product No **SS** - Plate Colour. PW and BK are also available, produced from polycarbonate.
BS Brushed Stainless, **CH** Polished Chrome, **SS** Stainless Steel, **PW** White, **BK** Black



SIN771U SCP471U



SIN655 SCP655



SIN580 SCP480



SIN570 SCP470

DEFINITY™ PLATES ARE MADE UP OF 2 COMPONENTS (INSERT & COVER PLATE)
Please select one of each component: Choose Insert (Blue Code) then Choose Cover Plate (Orange Code)

Socket Inserts

SIN771U	13A 1 Gang Switched Socket With 2.1A USB Outlet Insert
SIN770	13A 2 Gang Switched Socket With 2.1A USB Outlet (Twin Earth) Insert
SIN780	13A 2 Gang Switched Socket With Twin 2.1A USB Outlets (4.2A) (Twin Earth) Insert

Socket Cover Plates

SCP471U	13A 1 Gang Switched Socket With 2.1A USB Charger Cover Plate
SCP470	13A 2 Gang Switched Socket With 2.1A USB Charger Cover Plate
SCP480	13A 2 Gang Switched Socket With Twin 2.1A USB Charger Cover Plate

Ingot Socket Inserts

SIN571U	13A Ingot 1 Gang Switched Socket With 2.1A USB Outlet Insert
SIN570	13A Ingot 2 Gang Switched Sockets With 2.1A USB Outlet (Twin Earth) Insert
SIN580	13A Ingot 2 Gang Switched Socket With Twin 2.1A USB Outlets (4.2A) (Twin Earth) Insert

Socket Cover Plates

SCP471U	13A 1 Gang Switched Socket With 2.1A USB Charger Cover Plate
SCP470	13A 2 Gang Switched Socket With 2.1A USB Charger Cover Plate
SCP480	13A 2 Gang Switched Socket With Twin 2.1A USB Charger Cover Plate

Lockable Socket Inserts

SIN655	13A 1G DP Key Lockable Socket With Neon Insert

Lockable Socket Cover Plates

SCP655	13A 1 Gang DP Key Lockable Socket With Neon Cover Plate

Standards: BS1363, **570,571:** BS1363, BS5733, BS60950-1, EN61000-6-1, EN 61000-6-3 **655:** BS EN 60669-1, BS1363-2
Back Box Depth: 35mm Minimum **571, 655, 771:** 47mm Minimum **Cable Size:** 4 x 2.5mm² / 2 x 4mm² **655:** 3 x 2.5mm², 2 x 4mm²
Dimensions: **1 Gang:** (86mm x 86mm x 4mm), **2 Gang:** (146mm x 86mm x 4mm)

Understanding the code:
SIN - Insert Prefix **036** - Product No **BK** - Insert Colour **SS** - 'INGOT' Switch Finish (if applicable).
SCP - Definity™ Cover Plate Prefix **436** - Product No **SS** - Plate Colour. PW and BK are also available, produced from polycarbonate.
BS Brushed Stainless, **CH** Polished Chrome, **SS** Stainless Steel, **PW** White, **BK** Black



SIN050 SCP150



SIN051 SCP151



SIN052 SCP152



SIN053 SCP153



SIN652 SCP252



SIN653 SCP253

DEFINITY™ PLATES ARE MADE UP OF 2 COMPONENTS (INSERT & COVER PLATE)
Please select one of each component: Choose Insert (Blue Code) then Choose Cover Plate (Orange Code)

Fused Connection Unit With Optional Flex Outlet Inserts

SIN050 13A FCU Insert
SIN051 13A Switched FCU Insert
SIN052 13A Switched FCU With Neon Insert
SIN053 13A FCU With Neon Insert

Fused Connection Unit Without Flex Outlet Inserts

SIN650 13A FCU Insert
SIN651 13A Switched FCU Insert
SIN652 13A Switched FCU With Neon Insert
SIN653 13A FCU With Neon Insert

Fused Connection Unit With Flex Outlet Cover Plates

SCP150 13A FCU Cover Plate
SCP151 13A Switched FCU Cover Plate
SCP152 13A Switched FCU With Neon Cover Plate
SCP153 13A FCU With Neon Cover Plate

Fused Connection Unit Without Flex Outlet Cover Plates

SCP250 13A FCU Cover Plate
SCP251 13A Switched FCU Cover Plate
SCP252 13A Switched FCU With Neon Cover Plate
SCP253 13A FCU With Neon Cover Plate

Standards: BS 1363 and BS 1362 (fuse)
Back Box Depth: 35mm Minimum **Cable Size:** 3 x 2.5mm² or 2 x 4mm²
Dimensions: **1 Gang:** (86mm x 86mm x 4mm)

Understanding the code:
SIN - Insert Prefix **036** - Product No **BK** - Insert Colour **SS** - 'INGOT' Switch Finish (if applicable).
SCP - Definity™ Cover Plate Prefix **436** - Product No **SS** - Plate Colour. PW and BK are also available, produced from polycarbonate.
BS Brushed Stainless, **CH** Polished Chrome, **SS** Stainless Steel, **PW** White, **BK** Black



SIN550 SCP150



SIN551 SCP151



SIN552 SCP152



SIN750 SCP250



SIN751 SCP251



SIN753 SCP253

DEFINITY™ PLATES ARE MADE UP OF 2 COMPONENTS (INSERT & COVER PLATE)
Please select one of each component: Choose Insert (Blue Code) then Choose Cover Plate (Orange Code)

Ingot Fused Connection Unit With Optional Flex Outlet Inserts

SIN550	13A Ingot FCU Insert
SIN551	13A Ingot Switched FCU Insert
SIN552	13A Ingot Switched FCU With Neon Insert
SIN553	13A Ingot FCU With Neon Insert

Ingot Fused Connection Unit Without Flex Outlet Inserts

SIN750	13A Ingot FCU Insert
SIN751	13A Ingot Switched FCU Insert
SIN752	13A Ingot Switched FCU With Neon Insert
SIN753	13A Ingot FCU With Neon Insert

Fused Connection Unit With Flex Outlet Cover Plates

SCP150	13A FCU Cover Plate
SCP151	13A Switched FCU Cover Plate
SCP152	13A Switched FCU With Neon Cover Plate
SCP153	13A FCU With Neon Cover Plate

Fused Connection Unit Without Flex Outlet Cover Plates

SCP250	13A FCU Cover Plate
SCP251	13A Switched FCU Cover Plate
SCP252	13A Switched FCU With Neon Cover Plate
SCP253	13A FCU With Neon Cover Plate

Standards: BS 1363 and BS 1362 (fuse)
Back Box Depth: 35mm Minimum **Cable Size:** 3 x 2.5mm² or 2 x 4mm²
Dimensions: **1 Gang:** (86mm x 86mm x 4mm)

Understanding the code:
SIN - Insert Prefix **036** - Product No **BK** - Insert Colour **SS** - 'INGOT' Switch Finish (if applicable).
SCP - Definity™ Cover Plate Prefix **436** - Product No **SS** - Plate Colour. PW and BK are also available, produced from polycarbonate.
BS Brushed Stainless, **CH** Polished Chrome, **SS** Stainless Steel, **PW** White, **BK** Black



SIN250 SCP350



SIN251 SCP351



SIN252 SCP352



SIN253 SCP353

DEFINITY™ PLATES ARE MADE UP OF 2 COMPONENTS (INSERT & COVER PLATE)
Please select one of each component: Choose Insert **(Blue Code)** then Choose Cover Plate **(Orange Code)**

Lockable Fused Connection Unit With Optional Flex Outlet Insert

SIN250	13A Lockable FCU Insert
SIN249RD	3A Lockable FCU Insert
SIN251	13A Lockable Switched FCU Insert
SIN256RD	3A Lockable Switched FCU Insert
SIN252	13A Lockable Switched FCU With Neon Insert
SIN253	13A Lockable FCU With Neon Insert

Lockable Fused Connection Unit With Flex Outlet Cover Plates

SCP350	13A Lockable FCU Cover Plate
SCP351	13A Lockable Switched FCU Cover Plate
SCP352	13A Lockable Switched FCU With Neon Cover Plate
SCP353	13A Lockable FCU With Neon Cover Plate

Standards: BS 1363 and BS 1362 (fuse)
Back Box Depth: 35mm Minimum **Cable Size:** 3 x 2.5mm² or 2 x 4mm²
Dimensions: **1 Gang:** (86mm x 86mm x 4mm)

Understanding the code:
SIN - Insert Prefix **036** - Product No **BK** - Insert Colour **SS** - 'INGOT' Switch Finish (if applicable).
SCP - Definity™ Cover Plate Prefix **436** - Product No **SS** - Plate Colour. PW and BK are also available, produced from polycarbonate.
BS Brushed Stainless, **CH** Polished Chrome, **SS** Stainless Steel, **PW** White, **BK** Black



SIN850 SCP450



SIN851 SCP451



SIN852 SCP452



SIN853 SCP453

DEFINITY™ PLATES ARE MADE UP OF 2 COMPONENTS (INSERT & COVER PLATE)
Please select one of each component: Choose Insert **(Blue Code)** then Choose Cover Plate **(Orange Code)**

Lockable Fused Connection Unit Without Flex Outlet Insert

SIN850	13A Lockable FCU Insert
SIN851	13A Lockable Switched FCU Insert
SIN852	13A Lockable Switched FCU With Neon Insert
SIN853	13A Lockable FCU With Neon Insert

Lockable Fused Connection Unit Without Flex Outlet Cover Plates

SCP450	13A Lockable FCU Cover Plate
SCP451	13A Lockable Switched FCU Cover Plate
SCP452	13A Lockable Switched FCU With Neon Cover Plate
SCP453	13A Lockable FCU With Neon Cover Plate

Standards: BS 1363 and BS 1362 (fuse)
Back Box Depth: 35mm Minimum **Cable Size:** 3 x 2.5mm² or 2 x 4mm²
Dimensions: **1 Gang:** (86mm x 86mm x 4mm)

Understanding the code:
SIN - Insert Prefix **036** - Product No **BK** - Insert Colour **SS** - 'INGOT' Switch Finish (if applicable).
SCP - Definity™ Cover Plate Prefix **436** - Product No **SS** - Plate Colour. PW and BK are also available, produced from polycarbonate.
BS Brushed Stainless, **CH** Polished Chrome, **SS** Stainless Steel, **PW** White, **BK** Black



SIN200 SCP200



SIN201 SCP201



SIN202 SCP202



SIN204 SCP204



SIN205 SCP205



SIN203 SCP203

DEFINITY™ PLATES ARE MADE UP OF 2 COMPONENTS (INSERT & COVER PLATE)
Please select one of each component: Choose Insert (Blue Code) then Choose Cover Plate (Orange Code)

45A DP Switches & Socket Inserts

SIN200	45A 1 Gang DP Switch Insert
SIN201	45A 1 Gang DP Switch With Neon Insert
SIN202	45A 2 Gang DP Switch Insert
SIN203	45A 2 Gang DP Switch With Neon Insert
SIN204	45A DP Switch With 13A DP Switched Socket Insert
SIN205	45A DP Switch With 13A DP Switched Socket & Neons Insert

Switches & Socket Cover Plates

SCP200	45A 1 Gang Switch Cover Plate
SCP201	45A 1 Gang Switch With Neon Cover Plate
SCP202	45A 2 Gang Switch Cover Plate
SCP203	45A 2 Gang Switch With Neon Cover Plate
SCP204	45A 2 Gang Switch With 13A Switched Socket Cover Plate
SCP205	45A 2 Gang Switch With 13A Switched Socket & Neons Cover Plate

Standards: BS EN 60669, BS 4177
Back Box Depth: 47mm Minimum **Cable Size: 45A:** 1 x 16mm²
Dimensions: 1 Gang: (86mm x 86mm x 4mm), **2 Gang:** (146mm x 86mm x 4mm)

Understanding the code:
SIN - Insert Prefix **036** - Product No **BK** - Insert Colour **SS** - 'INGOT' Switch Finish (if applicable).
SCP - Definity™ Cover Plate Prefix **436** - Product No **SS** - Plate Colour. PW and BK are also available, produced from polycarbonate.
BS Brushed Stainless, **CH** Polished Chrome, **SS** Stainless Steel, **PW** White, **BK** Black



SIN500 SCP200



SIN501 SCP201



SIN502 SCP202



SIN504 SCP204



SIN503 SCP203



SIN505 SCP205

DEFINITY™ PLATES ARE MADE UP OF 2 COMPONENTS (INSERT & COVER PLATE)
Please select one of each component: Choose Insert **(Blue Code)** then Choose Cover Plate **(Orange Code)**

Ingot 45A Switches & Socket Inserts

SIN500	45A Ingot 1 Gang DP Switch Insert
SIN501	45A Ingot 1 Gang DP Switch With Neon Insert
SIN502	45A Ingot 2 Gang DP Switch Insert
SIN503	45A Ingot 2 Gang DP Switch With Neon Insert
SIN504	45A Ingot DP Switch With 13A DP Switched Socket Insert
SIN505	45A Ingot DP Switch With 13A DP Switched Socket & Neons Insert

Switches & Socket Cover Plates

SCP200	45A 1 Gang Switch Cover Plate
SCP201	45A 1 Gang Switch With Neon Cover Plate
SCP202	45A 2 Gang Switch Cover Plate
SCP203	45A 2 Gang Switch With Neon Cover Plate
SCP204	45A 2 Gang Switch With 13A Switched Socket Cover Plate
SCP205	45A 2 Gang Switch With 13A Switched Socket & Neons Cover Plate

Standards: BS EN 60669, BS 4177
Back Box Depth: 47mm Minimum **Cable Size: 45A:** 1 x 16mm²
Dimensions: 1 Gang: (86mm x 86mm x 4mm), **2 Gang:** (146mm x 86mm x 4mm)

Understanding the code:
SIN - Insert Prefix **036** - Product No **BK** - Insert Colour **SS** - 'INGOT' Switch Finish (if applicable).
SCP - Definity™ Cover Plate Prefix **436** - Product No **SS** - Plate Colour. PW and BK are also available, produced from polycarbonate.
BS Brushed Stainless, **CH** Polished Chrome, **SS** Stainless Steel, **PW** White, **BK** Black



SIN022 SCP322



SIN023 SCP323



SIN020 SCP402



SIN622 SCP422



SIN623 SCP423

DEFINITY™ PLATES ARE MADE UP OF 2 COMPONENTS (INSERT & COVER PLATE)
Please select one of each component: Choose Insert (Blue Code) then Choose Cover Plate (Orange Code)

20A DP Switch With Optional Flex Outlet Inserts

SIN022 20A DP Switch Insert
SIN023 20A DP Switch With Neon Insert

20A DP Switch Without Flex Outlet Inserts

SIN622 20A DP Switch Insert
SIN623 20A DP Switch With Neon Insert

3 Pole Fan Isolation Switch Insert

SIN020 10A 3 Pole Fan Isolation Switch Insert

20A DP Switch With Flex Outlet Cover Plates

SCP322 20A DP Switch Cover Plate
SCP323 20A DP Switch With Neon Cover Plate

20A DP Switch Without Flex Outlet Cover Plates

SCP422 20A DP Switch Cover Plate
SCP423 20A DP Switch With Neon Cover Plate

Unfurnished Plate Cover Plates

SCP402 1 Gang MiniGrid™ Cover Plate - 2 Apertures

Standards: BS EN 60669 **Back Box Depth:** 35mm Minimum **020:** 25mm
Cable Size: **20A DP:** 4 x 2.5mm² **10A 3P:** 1 x 2.5mm² / 2 x 1.5mm²
Dimensions: **1 Gang:** (86mm x 86mm x 4mm)

Understanding the code:
SIN - Insert Prefix **036** - Product No **BK** - Insert Colour **SS** - 'INGOT' Switch Finish (if applicable).
SCP - Definity™ Cover Plate Prefix **436** - Product No **SS** - Plate Colour. PW and BK are also available, produced from polycarbonate.
BS Brushed Stainless, **CH** Polished Chrome, **SS** Stainless Steel, **PW** White, **BK** Black



SIN520 SCP402



SIN522 SCP322



SIN523 SCP323



SIN722 SCP422



SIN723 SCP423

DEFINITY™ PLATES ARE MADE UP OF 2 COMPONENTS (INSERT & COVER PLATE)
Please select one of each component: Choose Insert **(Blue Code)** then Choose Cover Plate **(Orange Code)**

Ingot 20A DP Switch With Optional Flex Inserts

SIN522 20A Ingot DP Switch Insert
SIN523 20A Ingot DP Switch With Neon Insert

Ingot 20A DP Switch Without Flex Inserts

SIN722 20A Ingot DP Switch Insert
SIN723 20A Ingot DP Switch With Neon Insert

Ingot 3 Pole Fan Isolation Switch Insert

SIN520 10A Ingot 3 Pole Fan Isolation Switch Insert

20A DP Switch With Flex Outlet Cover Plates

SCP322 20A DP Switch Cover Plate
SCP323 20A DP Switch With Neon Cover Plate

20A DP Switch Without Flex Outlet Cover Plates

SCP422 20A DP Switch Cover Plate
SCP423 20A DP Switch With Neon Cover Plate

Unfurnished Plate Cover Plates

SCP402 1 Gang MiniGrid™ Cover Plate - 2 Apertures

Standards: BS EN 60669 **Back Box Depth:** 35mm Minimum **520:** 25mm
Cable Size: **20A DP:** 4 x 2.5mm² **10A 3P:** 1 x 2.5mm² / 2 x 1.5mm²
Dimensions: **1 Gang:** (86mm x 86mm x 4mm)

Understanding the code:
SIN - Insert Prefix **036** - Product No **BK** - Insert Colour **SS** - 'INGOT' Switch Finish (if applicable).
SCP - Definity™ Cover Plate Prefix **436** - Product No **SS** - Plate Colour. PW and BK are also available, produced from polycarbonate.
BS Brushed Stainless, **CH** Polished Chrome, **SS** Stainless Steel, **PW** White, **BK** Black



SIN038 SCP238



SIN039 SCP239



SIN660 SCP660



SIN034 SCP234

DEFINITY™ PLATES ARE MADE UP OF 2 COMPONENTS (INSERT & COVER PLATE)
Please select one of each component: Choose Insert (Blue Code) then Choose Cover Plate (Orange Code)

Round Pin Socket Inserts

SIN039	2A Round Pin Socket Insert
SIN038	5A Round Pin Socket Insert
SIN034	15A Round Pin Switched Socket Insert

Round Pin Socket Cover Plates

SCP239	2A Round Pin Socket Cover Plate
SCP238	5A Round Pin Socket Cover Plate
SCP234	15A Round Pin Switched Socket Cover Plate

Lockable Switch Insert

SIN660	20A Double Pole Key Lockable Switch Insert

Lockable Switch Cover Plates

SCP660	20A Double Pole Key Lockable Switch Cover Plate

Standards: 034, 038, 039: BS546 **660:** BS EN 60669-1
Dimensions: 1 Gang: (86mm x 86mm x 4mm) **Back Box Depth:** 35mm Minimum **660:** 47mm
Cable Size: 2A: 2 x 2.5mm² / 3 x 1.5mm² **5A:** 2 x 2.5mm² / 3 x 1.5mm² **15A:** 4 x 2.5mm² **660:** 3 x 2.5mm², 2 x 4mm²

Understanding the code:
SIN - Insert Prefix **036** - Product No **BK** - Insert Colour **SS** - 'INGOT' Switch Finish (if applicable).
SCP - Definity™ Cover Plate Prefix **436** - Product No **SS** - Plate Colour. PW and BK are also available, produced from polycarbonate.
BS Brushed Stainless, **CH** Polished Chrome, **SS** Stainless Steel, **PW** White, **BK** Black



SIN024 SCP324



SIN100 SCP100



SIN060 SCP060



SIN061 SCP061

CLICK® dual voltage shaver outlets incorporate a double wound isolating transformer rated 20Va at 230V or 115V and meets BS EN 61558-2-5: 2010 making it safe for use in bathrooms. Shaver outlet is not continuously rated and therefore not suitable for use as a permanent charging outlet.

Sink/Bath Switch With Neon Insert

SIN024 20A Sink/Bath Switch With Neon Insert

Dual Voltage Shaver Socket Outlet Insert

SIN100 115/230V Dual Voltage Shaver Socket Insert

Blank Plate Inserts

SIN060 1 Gang Blank Plate Insert
SIN061 2 Gang Blank Plate Insert

Sink & Bath Switch With Neon Cover Plate

SCP324 20A Sink/Bath Switch With Neon Cover Plate

Dual Voltage Shaver Socket Outlet Cover Plate

SCP100 Dual Voltage Shaver Socket Cover Plate

Blank Plate Cover Plates

SCP060 1 Gang Blank Cover Plate
SCP061 2 Gang Blank Cover Plate

Standards: 024: BS EN 60669 **100:** BS EN 61558
Dimensions: 1 Gang: (86mm x 86mm x 4mm), **2 Gang:** (146mm x 86mm x 4mm) **Back Box Depth:** 35mm min. **100:** 47mm min.
Cable Size: 024: 3 x 2.5mm² **100:** 2 x 1.5mm² / 1 x 2.5mm²

Understanding the code:
SIN - Insert Prefix **036** - Product No **BK** - Insert Colour **SS** - 'INGOT' Switch Finish (if applicable).
SCP - Definity™ Cover Plate Prefix **436** - Product No **SS** - Plate Colour. PW and BK are also available, produced from polycarbonate.
BS Brushed Stainless, **CH** Polished Chrome, **SS** Stainless Steel, **PW** White, **BK** Black

TV, Telephone & Data Sockets

The following pages contain details of Definity™ products designed to deal with handling data and media transfer through telephone, computer, TV or radio. As well as the finished products please also find details of unfurnished mounting plates designed to accept custom selections of New Media™ modules from our dedicated modules section.



RJ11 Outlet | UK Telephone Outlets
Satellite Socket Outlets | Coaxial Sockets





SIN120, SIN125 SCP120



SIN115 SCP115



SIN121, SIN126 SCP121

DEFINITY™ PLATES ARE MADE UP OF 2 COMPONENTS (INSERT & COVER PLATE)
Please select one of each component: Choose Insert **(Blue Code)** then Choose Cover Plate **(Orange Code)**

Single RJ11 Telephone Outlet Insert

SIN115 Single RJ11 (Irish/US) Outlet Insert

Telephone Outlet Inserts

SIN120 Single Telephone Outlet Insert - Master
SIN125 Single Telephone Outlet Insert - Secondary
SIN121 Twin Telephone Outlet Insert - Master
SIN126 Twin Telephone Outlet - Secondary Insert

Single RJ11 Telephone Outlet Cover Plate

SCP115 Single RJ11 Telephone Outlet Cover Plate

Telephone Outlet Cover Plates

SCP120 Single Telephone Outlet Cover Plate
SCP120 Single Telephone Outlet Cover Plate
SCP121 Twin Telephone Outlet Cover Plate
SCP121 Twin Telephone Outlet Cover Plate

Twin outlets are 2 separate sockets and not internally linked together.

Back Box Depth: 25mm Minimum **115:** 47mm Minimum **Termination Type:** IDC
Dimensions: 1 Gang: (86mm x 86mm x 4mm)

Understanding the code:
SIN - Insert Prefix **036** - Product No **BK** - Insert Colour **SS** - 'INGOT' Switch Finish (if applicable).
SCP - Definity™ Cover Plate Prefix **436** - Product No **SS** - Plate Colour. PW and BK are also available, produced from polycarbonate.
BS Brushed Stainless, **CH** Polished Chrome, **SS** Stainless Steel, **PW** White, **BK** Black



SIN065, SIN158 SCP231



SIN066, SIN159 SCP232



SIN156 SCP231



SIN157, SIN170 SCP232

DEFINITY™ PLATES ARE MADE UP OF 2 COMPONENTS (INSERT & COVER PLATE)
Please select one of each component: Choose Insert **(Blue Code)** then Choose Cover Plate **(Orange Code)**

Non-Isolated Coaxial Outlet Inserts

SIN065 Single Coaxial Outlet Insert
SIN066 Twin Coaxial Outlet Insert

Isolated Coaxial Socket Inserts

SIN158 Single Isolated Coaxial Outlet Insert
SIN159 Twin Isolated Coaxial Outlet Insert

Satellite Socket Inserts

SIN156 Non-Isolated Single Satellite Outlet Insert
SIN157 Isolated Satellite & Isolated Coaxial Outlet Insert
SIN170 Non-Isolated Satellite & Non-Isolated Coaxial Outlet Insert

Isolated Coaxial Cover Plates

SCP231 Single Coaxial Outlet Cover Plate
SCP232 Twin Coaxial Outlet Cover Plate

Isolated Coaxial Cover Plates

SCP231 Single Coaxial Outlet Cover Plate
SCP232 Twin Coaxial Outlet Cover Plate

Isolated Coaxial Cover Plates

SCP231 Single Coaxial Outlet Cover Plate
SCP232 Twin Coaxial Outlet Cover Plate
SCP232 Twin Coaxial Outlet Cover Plate

Isolated outlets will filter out any interference, if a 2 way signal is required, i.e. for use with satellite hard wire extensions, then a non-isolated outlet is required.

Back Box Depth: 25mm Minimum
Dimensions: 1 Gang: (86mm x 86mm x 4mm)

Understanding the code:
SIN - Insert Prefix **036** - Product No **BK** - Insert Colour **SS** - 'INGOT' Switch Finish (if applicable).
SCP - Definity™ Cover Plate Prefix **436** - Product No **SS** - Plate Colour. PW and BK are also available, produced from polycarbonate.
BS Brushed Stainless, **CH** Polished Chrome, **SS** Stainless Steel, **PW** White, **BK** Black




SIN310 SCP310



SIN312 SCP312



SIN311 SCP311



MM410BK MM405WH MM501BK MM440BK

new media™

See our dedicated New Media™ section for more information on the range of New Media™ modules available.

New Media™ Unfurnished Plate Inserts

SIN310	1 Gang New Media™ Unfurnished Plate Insert - 1 Aperture
SIN311	1 Gang New Media™ Unfurnished Plate Insert - 2 Apertures
SIN312	2 Gang New Media™ Unfurnished Plate Insert - 4 Apertures

New Media™ Cover Plates

SCP310	1 Gang New Media™ Cover Plate - 1 Aperture
SCP311	1 Gang New Media™ Cover Plate - 2 Apertures
SCP312	2 Gang New Media™ Cover Plate - 4 Apertures

DEFINITY™ PLATES ARE MADE UP OF 2 COMPONENTS (INSERT & COVER PLATE)

Please select one of each component:
Choose Insert (Blue Code)
then Choose Cover Plate (Orange Code)

Back Box Depth: Dependant on module used
Dimensions: 1 Gang: (86mm x 86mm x 4mm), **2 Gang:** (146mm x 86mm x 4mm)

Understanding the code:
SIN - Insert Prefix **036** - Product No **BK** - Insert Colour **SS** - 'INGOT' Switch Finish (if applicable).
SCP - Definity™ Cover Plate Prefix **436** - Product No **SS** - Plate Colour. PW and BK are also available, produced from polycarbonate.
BS Brushed Stainless, **CH** Polished Chrome, **SS** Stainless Steel, **PW** White, **BK** Black

Components Listing

Definity™ gives the flexibility to mix and match insert colours to cover plate finishes giving infinite combinations. With a wide selection of standard and ‘ingot’ metallic inserts, simply select your design and colour of insert. After selecting your choice of insert choose your preferred cover plate and simply clip it onto the insert to finalise the installation.







Insert Design



10AX 1 Gang 2 Way Switch



10AX 1 Gang Intermediate Switch



Single Plate Single Aperture 'Unfurnished'



10AX 2 Gang 2 Way Switch



Single Plate Twin Aperture 'Unfurnished'

Select either a Standard or Ingot Insert

Standard Insert
SIN011BK - Black
SIN011PW - White

Ingot Switch Insert
SIN411BKBS Black & Brushed Stainless
SIN411BKCH Black & Chrome
SIN411BKSS Black & Stainless Steel
SIN411PWBS White & Brushed Stainless
SIN411PWCH White & Chrome
SIN411PWSS White & Stainless Steel

Standard Insert
SIN025BK - Black
SIN025PW - White

Ingot Switch Insert
SIN425BKBS Black & Brushed Stainless
SIN425BKCH Black & Chrome
SIN425BKSS Black & Stainless Steel
SIN425PWBS White & Brushed Stainless
SIN425PWCH White & Chrome
SIN425PWSS White & Stainless Steel

Insert Frame Only
SIN401BK - Black
SIN401PW - White
SIN401RD - Red

Standard Insert
SIN012BK - Black
SIN012PW - White

Ingot Switch Insert
SIN412BKBS Black & Brushed Stainless
SIN412BKCH Black & Chrome
SIN412BKSS Black & Stainless Steel
SIN412PWBS White & Brushed Stainless
SIN412PWCH White & Chrome
SIN412PWSS White & Stainless Steel

Insert Frame Only
SIN402BK - Black
SIN402PW - White
SIN402RD - Red

Cover Plate

Single Cover Plate Single Aperture
SCP401††



Red (RD) Finish Available

Single Cover Plate Twin Aperture
SCP402††



Red (RD) Finish Available

Standards: BS EN 60669
Back Box Depth: 25mm Minimum **Cable Size:** 4 x 1.5mm² / 2 x 2.5mm² / 1 x 6mm² Maximum
Dimensions: **1 Gang:** (86mm x 86mm x 4mm), **2 Gang:** (146mm x 86mm x 4mm)

Understanding the code:
SIN - Insert Prefix **036** - Product No **BK** - Insert Colour **SS** - 'INGOT' Switch Finish (if applicable).
SCP - Definity™ Cover Plate Prefix **436** - Product No **SS** - Plate Colour. PW and BK are also available, produced from polycarbonate.
BS Brushed Stainless, **CH** Polished Chrome, **SS** Stainless Steel, **PW** White, **BK** Black

Insert Design



10AX 3 Gang 2 Way Switch



Single Plate Triple Aperture 'Unfurnished'



10AX 4 Gang 2 Way Switch



Double Plate (2 x 2) Aperture 'Unfurnished'

Select either a Standard or Ingot Insert

Standard Insert
SIN013BK - Black
SIN013PW - White

Insert Frame Only
SIN403BK - Black
SIN403PW - White
SIN403RD - Red

Ingot Switch Insert
SIN413BKBS
Black & Brushed Stainless
SIN413BKCH
Black & Chrome
SIN413BKSS
Black & Stainless Steel
SIN413PWBS
White & Brushed Stainless
SIN413PWCH
White & Chrome
SIN413PWSS
White & Stainless Steel

Standard Insert
SIN019BK - Black
SIN019PW - White

Ingot Switch Insert
SIN414BKBS
Black & Brushed Stainless
SIN414BKCH
Black & Chrome
SIN414BKSS
Black & Stainless Steel
SIN414PWBS
White & Brushed Stainless
SIN414PWCH
White & Chrome
SIN414PWSS
White & Stainless Steel

Insert Frame Only
SIN404BK - Black
SIN404PW - White
SIN404RD - Red

Cover Plate

Single Cover Plate Triple Aperture
SCP403††



Red (RD) Finish Available

Double Cover Plate (2 x 2) Aperture
SCP404††



Standards: BS EN 60669
Back Box Depth: 25mm Minimum **Cable Size:** 4 x 1.5mm² / 2 x 2.5mm² / 1 x 6mm² Maximum
Dimensions: **1 Gang:** (86mm x 86mm x 4mm), **2 Gang:** (146mm x 86mm x 4mm)

Understanding the code:
SIN - Insert Prefix **036** - Product No **BK** - Insert Colour **SS** - 'INGOT' Switch Finish (if applicable).
SCP - Definity™ Cover Plate Prefix **436** - Product No **SS** - Plate Colour. PW and BK are also available, produced from polycarbonate.
BS Brushed Stainless, **CH** Polished Chrome, **SS** Stainless Steel, **PW** White, **BK** Black

Insert Design



10AX 6 Gang
2 Way Switch



Double Plate
(2 x 3) Aperture
'Unfurnished'



Double Plate
(6 In-line) Aperture
'Unfurnished'

Select either a Standard or Ingot Insert

Standard Insert
SIN105BK - Black
SIN105PW - White

Ingot Switch Insert
SIN416BKBS
Black & Brushed Stainless
SIN416BKCH
Black & Chrome
SIN416BKSS
Black & Stainless Steel
SIN416PWBS
White & Brushed Stainless
SIN416PWCH
White & Chrome
SIN416PWSS
White & Stainless Steel

Standard Insert
SIN406BK - Black
SIN406PW - White

Standard Insert
SIN426BK - Black
SIN426PW - White

Cover Plate

Double Cover Plate (2 x 3) Aperture
SCP406††



Double Cover Plate (6 In-line) Aperture
SCP426††



Standards: BS EN 60669
Back Box Depth: 25mm Minimum **Cable Size:** 4 x 1.5mm² / 2 x 2.5mm² / 1 x 6mm² Maximum
Dimensions: **2 Gang:** (146mm x 86mm x 4mm)

Understanding the code:
SIN - Insert Prefix **036** - Product No **BK** - Insert Colour **SS** - 'INGOT' Switch Finish (if applicable).
SCP - Definity™ Cover Plate Prefix **436** - Product No **SS** - Plate Colour. PW and BK are also available, produced from polycarbonate.
BS Brushed Stainless, **CH** Polished Chrome, **SS** Stainless Steel, **PW** White, **BK** Black

Insert Design



1 Gang 2 Way 400W Rotary Dimmer Switch



1 Gang 2 Way 250W Rotary Dimmer Switch



2 Gang 2 Way 250W Rotary Dimmer Switch



3 Gang 2 Way 250W Rotary Dimmer Switch

Select either a Standard or Ingot Insert

Dimmer Switch
SIN140
400W / Va
Suitable for dimming both resistive and inductive loads.

Dimmer knob supplied with cover plate

Dimmer Switch
SIN141
250W / Va
Suitable for dimming both resistive and inductive loads

Dimmer knob supplied with cover plate

Rotary Dimmer Mounting Plate
SIN141PL
Dimmer module supplied separately

Dimmer Switch
SIN142
250W / Va
Suitable for dimming both resistive and inductive loads

Dimmer knob supplied with cover plate

Rotary Dimmer Mounting Plate
SIN142PL
Dimmer module supplied separately

Dimmer Switch
SIN143
250W / Va
Suitable for dimming both resistive and inductive loads

Dimmer knob supplied with cover plate

Rotary Dimmer Mounting Plate
SIN143PL
Dimmer module supplied separately

Cover Plate

1 Gang Dimmer Switch Cover Plate & Knob
SCP241††



2 Gang Dimmer Switch Cover Plate & Knobs
SCP242††



3 Gang Dimmer Switch Cover Plate & Knobs
SCP243††



Standards: BS EN 60669, BS EN 55015 Maximum Wattage: 1 Gang 630W, 2 Gang 1200W
Type: Leading Edge **Back Box Depth:** 35mm **Cable Size:** 2 x 1.5mm²
Dimensions: **1 Gang:** (86mm x 86mm x 4mm), **2 Gang:** (146mm x 86mm x 4mm)

Understanding the code:
SIN - Insert Prefix **036** - Product No **SS** - 'INGOT' Switch Finish (if applicable).
SCP - Definity™ Cover Plate Prefix **436** - Product No **SS** - Plate Colour. PW and BK are also available, produced from polycarbonate.
BS Brushed Stainless, **CH** Polished Chrome, **SS** Stainless Steel, **PW** White, **BK** Black

Insert Design



4 Gang 2 Way 250W Dimmer Switch



10AX 1 Gang 2 Way Toggle Switch



10AX 1 Gang Intermediate Toggle Switch

Select either a Standard or Ingot Insert

Dimmer Switch

SIN144
250W / Va
Suitable for dimming both resistive and inductive loads

Dimmer knob supplied with cover plate

Rotary Dimmer Mounting Plate

SIN144PL
Dimmer module supplied separately

Toggle Switch

SIN421CH - Chrome
SIN421PN - Pearl Nickel

Recommended Cover Plate and Toggle Switch

Chrome Toggle:
Chrome
Pearl Nickel Toggle:
Brushed Stainless & Stainless Steel

Toggle Switch

SIN420CH - Chrome
SIN420PN - Pearl Nickel

Recommended Cover Plate and Toggle Switch

Chrome Toggle:
Chrome
Pearl Nickel Toggle:
Brushed Stainless & Stainless Steel

Cover Plate

4 Gang Dimmer Switch Cover Plate & Knobs

SCP244††



1 Gang Toggle Switch Cover Plate

SCP221††



Standards: BS EN 60669, BS EN 55015 Maximum **Dimmer Wattage: 1 Gang:** 630W, **2 Gang:** 1200W
Back Box Depth: 35mm **Cable Size:** 144: 2 x 1.5mm² Toggle: 2 x 2.5mm² / 4 x 1.5mm²
Dimensions: 1 Gang: (86mm x 86mm x 4mm), **2 Gang:** (146mm x 86mm x 4mm) **Dimmer Type:** Leading Edge

Understanding the code:
SIN - Insert Prefix **036** - Product No **SS** - 'INGOT' Switch Finish (if applicable).
SCP - Definity™ Cover Plate Prefix **436** - Product No **SS** - Plate Colour. PW and BK are also available, produced from polycarbonate.
BS Brushed Stainless, **CH** Polished Chrome, **SS** Stainless Steel, **PW** White, **BK** Black

Insert Design



10AX 2 Gang 2 Way Toggle Switch



10AX 3 Gang 2 Way Toggle Switch



10AX 4 Gang 2 Way Toggle Switch

Select either a Standard or Ingot Insert

Toggle Switch
SIN422CH - Chrome
SIN422PN - Pearl Nickel

Recommended Cover Plate and Toggle Switch
Chrome Toggle: Chrome
Pearl Nickel Toggle: Brushed Stainless & Stainless Steel

Toggle Switch
SIN423CH - Chrome
SIN423PN - Pearl Nickel

Recommended Cover Plate and Toggle Switch
Chrome Toggle: Chrome
Pearl Nickel Toggle: Brushed Stainless & Stainless Steel

Toggle Switch
SIN424CH - Chrome
SIN424PN - Pearl Nickel

Recommended Cover Plate and Toggle Switch
Chrome Toggle: Chrome
Pearl Nickel Toggle: Brushed Stainless & Stainless Steel

Cover Plate


2 Gang Toggle Switch Cover Plate
SCP222††



3 Gang Toggle Switch Cover Plate
SCP223††



4 Gang Toggle Switch Cover Plate
SCP224††



Standards: BS EN 60669
Back Box Depth: 35mm Minimum **Cable Size:** 2 x 2.5mm² / 4 x 1.5mm²
Dimensions: **1 Gang:** (86mm x 86mm x 4mm), **2 Gang:** (146mm x 86mm x 4mm)

Understanding the code:
SIN - Insert Prefix **036** - Product No **SS** - 'INGOT' Switch Finish (if applicable).
SCP - Definity™ Cover Plate Prefix **436** - Product No **SS** - Plate Colour. PW and BK are also available, produced from polycarbonate.
BS Brushed Stainless, **CH** Polished Chrome, **SS** Stainless Steel, **PW** White, **BK** Black

Insert Design



20A Double Pole Switch with Flex Outlet



20A Double Pole Switch with Flex Outlet & Neon



20A Double Pole Switch



20A Double Pole Switch with Neon

Select either a Standard or Ingot Insert

Standard Insert
SIN022BK - Black
SIN022PW - White

Ingot Switch Insert
SIN522BKBS
Black & Brushed Stainless
SIN522BKCH
Black & Chrome
SIN522BKSS
Black & Stainless Steel
SIN522PWBS
White & Brushed Stainless
SIN522PWCH
White & Chrome
SIN522PWSS
White & Stainless Steel

Standard Insert
SIN023BK - Black
SIN023PW - White

Ingot Switch Insert
SIN523BKBS
Black & Brushed Stainless
SIN523BKCH
Black & Chrome
SIN523BKSS
Black & Stainless Steel
SIN523PWBS
White & Brushed Stainless
SIN523PWCH
White & Chrome
SIN523PWSS
White & Stainless Steel

Standard Insert
SIN622BK - Black
SIN622PW - White

Ingot Switch Insert
SIN722BKBS
Black & Brushed Stainless
SIN722BKCH
Black & Chrome
SIN722BKSS
Black & Stainless Steel
SIN722PWBS
White & Brushed Stainless
SIN722PWCH
White & Chrome
SIN722PWSS
White & Stainless Steel

Standard Insert
SIN623BK - Black
SIN623PW - White

Ingot Switch Insert
SIN723BKBS
Black & Brushed Stainless
SIN723BKCH
Black & Chrome
SIN723BKSS
Black & Stainless Steel
SIN723PWBS
White & Brushed Stainless
SIN723PWCH
White & Chrome
SIN723PWSS
White & Stainless Steel

Cover Plate

20A DP Switch with Flex Outlet Cover Plate
SCP322††



20A DP Switch with Flex Outlet & Neon Cover Plate
SCP323††



20A DP Switch Cover Plate
SCP422††



20A DP Switch with Neon Cover Plate
SCP423††



Standards: BS EN 60669
Back Box Depth: 35mm Minimum **Cable Size:** 4 x 2.5mm²
Dimensions: **1 Gang:** (86mm x 86mm x 4mm)

Understanding the code:
SIN - Insert Prefix **036** - Product No **BK** - Insert Colour **SS** - 'INGOT' Switch Finish (if applicable).
SCP - Definity™ Cover Plate Prefix **436** - Product No **SS** - Plate Colour. PW and BK are also available, produced from polycarbonate.
BS Brushed Stainless, **CH** Polished Chrome, **SS** Stainless Steel, **PW** White, **BK** Black

Insert Design



20A Sink & Bath Switch with Neon



10A 3 Pole Fan Isolation Switch



Lockable Switch

Select either a Standard or Ingot Insert

Standard Insert
SIN024BK - Black
SIN024PW - White

Standard Insert
SIN020BK - Black
SIN020PW - White

Ingot Switch Insert
SIN520BKBS
Black & Brushed Stainless
SIN520BKCH
Black & Chrome
SIN520BKSS
Black & Stainless Steel
SIN520PWBS
White & Brushed Stainless
SIN520PWCH
White & Chrome
SIN520PWSS
White & Stainless Steel

Standard Insert
SIN660BK - Black

Cover Plate

20A Sink & Bath Switch with Neon Cover Plate
SCP324††



10A Fan Isolation Switch Cover Plate
SCP402††



Lockable Switch Cover Plate
SCP660††




Standards: BS EN 60669 **660:** BS EN 60669-1 **Back Box Depth:** 35mm Minimum **020/520:** 25mm **660:** 47mm
Cable Size: 024: 3 x 2.5mm² **020/520:** 2 x 1.5mm² **660:** 3 x 2.5mm², 2 x 4mm²
Dimensions: 1 Gang: (86mm x 86mm x 4mm), **2 Gang:** (146mm x 86mm x 4mm)

Understanding the code:
SIN - Insert Prefix **036** - Product No **BK** - Insert Colour **SS** - 'INGOT' Switch Finish (if applicable).
SCP - Definity™ Cover Plate Prefix **436** - Product No **SS** - Plate Colour. PW and BK are also available, produced from polycarbonate.
BS Brushed Stainless, **CH** Polished Chrome, **SS** Stainless Steel, **PW** White, **BK** Black

Insert Design



Lockable Socket



UK 13A 1 Gang Socket Outlet



115/230V Dual Voltage Shaver Socket Outlet

Select either a Standard or Ingot Insert

Standard Insert
SIN655BK - Black
SIN655PW - White

Standard Insert
SIN630BK - Black
SIN630PW - White

Standard Insert
SIN100BK - Black
SIN100PW - White

Cover Plate

Lockable Socket Cover Plate
SCP655††



UK 13A 1 Gang Socket Outlet Cover Plate
SCP430††



Dual Voltage Shaver Socket Outlet Cover Plate
SCP100††



Standards: BS 1363 **655:** BS EN 60669-1, BS1363-2
Back Box Depth: 35mm Minimum **655:** 47mm Minimum **100:** 47mm min **Cable Size:** 4 x 2.5mm² **655:** 3 x 2.5mm², 2 x 4mm²
Dimensions: 1 Gang: (86mm x 86mm x 4mm), **2 Gang:** (146mm x 86mm x 4mm)

Understanding the code:
SIN - Insert Prefix **036** - Product No **BK** - Insert Colour **SS** - 'INGOT' Switch Finish (if applicable).
SCP - Definity™ Cover Plate Prefix **436** - Product No **SS** - Plate Colour. PW and BK are also available, produced from polycarbonate.
BS Brushed Stainless, **CH** Polished Chrome, **SS** Stainless Steel, **PW** White, **BK** Black

Insert Design



2A 1 Gang Round Pin Socket Outlet



5A 1 Gang Round Pin Socket Outlet



15A 1 Gang Round Pin Switched Socket Outlet

Select either a Standard or Ingot Insert

Standard Insert
SIN039BK - Black
SIN039PW - White

Standard Insert
SIN038BK - Black
SIN038PW - White

Standard Insert
SIN034BK - Black
SIN034PW - White

Cover Plate

2A 1 Gang Round Pin Socket Outlet Cover Plate
SCP239††



5A 1 Gang Round Pin Socket Outlet Cover Plate
SCP238††



15A 1 Gang Round Pin Switched Socket Outlet Cover Plate
SCP234††



Standards: BS 1363, BS 546, **100:** BS EN 61558
Dimensions: 1 Gang: (86mm x 86mm x 4mm), **2 Gang:** (146mm x 86mm x 4mm) **Back Box Depth:** 35mm Minimum
Cable Size: 2A: 2 x 2.5mm² / 3 x 1.5mm² **5A:** 2 x 2.5mm² / 3 x 1.5mm² **15A:** 4 x 2.5mm² **100:** 2 x 1.5mm² / 1 x 2.5mm²

Understanding the code:
SIN - Insert Prefix **036** - Product No **BK** - Insert Colour **SS** - 'INGOT' Switch Finish (if applicable).
SCP - Definity™ Cover Plate Prefix **436** - Product No **SS** - Plate Colour. PW and BK are also available, produced from polycarbonate.
BS Brushed Stainless, **CH** Polished Chrome, **SS** Stainless Steel, **PW** White, **BK** Black

Insert Design



UK 13A 1 Gang Double Pole Switched Socket Outlet



UK 13A 2 Gang Double Pole Switched Socket Outlet

Select either a Standard or Ingot Insert

Standard Insert
SIN035BK - Black
SIN035PW - White

Ingot Switch Insert
SIN535BKBS
Black & Brushed Stainless
SIN535BKCH
Black & Chrome
SIN535BKSS
Black & Stainless Steel
SIN535PWBS
White & Brushed Stainless
SIN535PWCH
White & Chrome
SIN535PWSS
White & Stainless Steel

Standard Insert
SIN036BK - Black
SIN036PW - White
SIN036RD - Red

Ingot Switch Insert
SIN536BKBS
Black & Brushed Stainless
SIN536BKCH
Black & Chrome
SIN536BKSS
Black & Stainless Steel
SIN536PWBS
White & Brushed Stainless
SIN536PWCH
White & Chrome
SIN536PWSS
White & Stainless Steel

Cover Plate

UK 13A 1 Gang Switched Socket Outlet Cover Plate
SCP435††



UK 13A 2 Gang Switched Socket Outlet Cover Plate
SCP436††



Red (RD) Finish Available

Standards: BS 1363
Back Box Depth: 35mm Minimum **Cable Size:** 4 x 2.5mm² / 2 x 4mm²
Dimensions: **1 Gang:** (86mm x 86mm x 4mm), **2 Gang:** (146mm x 86mm x 4mm)

Understanding the code:
SIN - Insert Prefix **036** - Product No **BK** - Insert Colour **SS** - 'INGOT' Switch Finish (if applicable).
SCP - Definity™ Cover Plate Prefix **436** - Product No **SS** - Plate Colour. PW and BK are also available, produced from polycarbonate.
BS Brushed Stainless, **CH** Polished Chrome, **SS** Stainless Steel, **PW** White, **BK** Black

Insert Design



UK 13A 1 Gang Switched Socket Outlet with 2.1A USB Outlet



UK 13A 2 Gang Switched Socket Outlet with 2.1A USB Outlet



UK 13A 2 Gang Switched Socket Outlet with Twin 2.1A USB Outlets

Select either a Standard or Ingot Insert

Standard Insert
SIN771UBK - Black
SIN771UPW - White

Ingot Switch Insert
SIN571UBKBS
Black & Brushed Stainless
SIN571UBKCH
Black & Chrome
SIN571UBKSS
Black & Stainless Steel
SIN571UPWBS
White & Brushed Stainless
SIN571UPWCH
White & Chrome
SIN571UPWSS
White & Stainless Steel

Standard Insert
SIN770BK - Black
SIN770PW - White

Ingot Switch Insert
SIN570BKBS
Black & Brushed Stainless
SIN570BKCH
Black & Chrome
SIN570BKSS
Black & Stainless Steel
SIN570PWBS
White & Brushed Stainless
SIN570PWCH
White & Chrome
SIN570PWSS
White & Stainless Steel

Standard Insert
SIN780BK - Black
SIN780PW - White

Ingot Switch Insert
SIN580BKBS
Black & Brushed Stainless
SIN580BKCH
Black & Chrome
SIN580BKSS
Black & Stainless Steel
SIN580PWBS
White & Brushed Stainless
SIN580PWCH
White & Chrome
SIN580PWSS
White & Stainless Steel

Cover Plate

UK 13A 1 Gang Switched Socket Outlet with 2.1A USB Outlet Cover Plate



SCP471U††

UK 13A 2 Gang Switched Socket Outlet with 2.1A USB Outlet Cover Plate



SCP470††

UK 13A 2 Gang Switched Socket Outlet with Twin 2.1A USB Outlets Cover Plate



SCP480††

Standards: BS1363-2, BS EN 62368-1, BS EN 62680-1-1
Back Box Depth: 35mm Minimum **Cable Size:** 4 x 2.5mm² / 2 x 4mm²
Dimensions: **1 Gang:** (86mm x 86mm x 4mm), **2 Gang:** (146mm x 86mm x 4mm)

Understanding the code:
SIN - Insert Prefix **036** - Product No **BK** - Insert Colour **SS** - 'INGOT' Switch Finish (if applicable).
SCP - Definity™ Cover Plate Prefix **436** - Product No **SS** - Plate Colour. PW and BK are also available, produced from polycarbonate.
BS Brushed Stainless, **CH** Polished Chrome, **SS** Stainless Steel, **PW** White, **BK** Black

Insert Design




13A Fused Connection Unit with Flex Outlet



13A Fused Connection Unit Double Pole Switched with Flex Outlet



13A Fused Connection Unit Double Pole Switched with Flex Outlet & Neon



13A Fused Connection Unit with Flex Outlet & Neon

Select either a Standard or Ingot Insert

Standard Insert
SIN050BK - Black
SIN050PW - White

Ingot Switch Insert
SIN550BKBS
Black & Brushed Stainless
SIN550BKCH
Black & Chrome
SIN550BKSS
Black & Stainless Steel
SIN550PWBS
White & Brushed Stainless
SIN550PWCH
White & Chrome
SIN550PWSS
White & Stainless Steel

Standard Insert
SIN051BK - Black
SIN051PW - White

Ingot Switch Insert
SIN551BKBS
Black & Brushed Stainless
SIN551BKCH
Black & Chrome
SIN551BKSS
Black & Stainless Steel
SIN551PWBS
White & Brushed Stainless
SIN551PWCH
White & Chrome
SIN551PWSS
White & Stainless Steel

Standard Insert
SIN052BK - Black
SIN052PW - White

Ingot Switch Insert
SIN552BKBS
Black & Brushed Stainless
SIN552BKCH
Black & Chrome
SIN552BKSS
Black & Stainless Steel
SIN552PWBS
White & Brushed Stainless
SIN552PWCH
White & Chrome
SIN552PWSS
White & Stainless Steel

Standard Insert
SIN053BK - Black
SIN053PW - White

Ingot Switch Insert
SIN553BKBS
Black & Brushed Stainless
SIN553BKCH
Black & Chrome
SIN553BKSS
Black & Stainless Steel
SIN553PWBS
White & Brushed Stainless
SIN553PWCH
White & Chrome
SIN553PWSS
White & Stainless Steel

Cover Plate

13A FCU with Flex Outlet Cover Plate
SCP150††



13A FCU Switched with Flex Outlet Cover Plate
SCP151††



13A FCU Switched with Flex Outlet & Neon Cover Plate
SCP152††



13A FCU with Flex Outlet & Neon Cover Plate
SCP153††



Standards: BS 1363 and BS 1362 (fuse)
Back Box Depth: 35mm Minimum **Cable Size:** 3 x 2.5mm² or 2 x 4mm²
Dimensions: **1 Gang:** (86mm x 86mm x 4mm)

Understanding the code:
SIN - Insert Prefix **036** - Product No **BK** - Insert Colour **SS** - 'INGOT' Switch Finish (if applicable).
SCP - Definity™ Cover Plate Prefix **436** - Product No **SS** - Plate Colour. PW and BK are also available, produced from polycarbonate.
BS Brushed Stainless, **CH** Polished Chrome, **SS** Stainless Steel, **PW** White, **BK** Black

Insert Design



13A Fused Connection Unit



13A Fused Connection Unit, Double Pole Switched



13A Fused Connection Unit, Double Pole Switched with Neon



13A Fused Connection Unit with Neon

Select either a Standard or Ingot Insert

Standard Insert
SIN650BK - Black
SIN650PW - White

Ingot Switch Insert
SIN750BKBS
Black & Brushed Stainless
SIN750BKCH
Black & Chrome
SIN750BKSS
Black & Stainless Steel
SIN750PWBS
White & Brushed Stainless
SIN750PWCH
White & Chrome
SIN750PWSS
White & Stainless Steel

Standard Insert
SIN651BK - Black
SIN651PW - White

Ingot Switch Insert
SIN751BKBS
Black & Brushed Stainless
SIN751BKCH
Black & Chrome
SIN751BKSS
Black & Stainless Steel
SIN751PWBS
White & Brushed Stainless
SIN751PWCH
White & Chrome
SIN751PWSS
White & Stainless Steel

Standard Insert
SIN652BK - Black
SIN652PW - White

Ingot Switch Insert
SIN752BKBS
Black & Brushed Stainless
SIN752BKCH
Black & Chrome
SIN752BKSS
Black & Stainless Steel
SIN752PWBS
White & Brushed Stainless
SIN752PWCH
White & Chrome
SIN752PWSS
White & Stainless Steel

Standard Insert
SIN653BK - Black
SIN653PW - White

Ingot Switch Insert
SIN753BKBS
Black & Brushed Stainless
SIN753BKCH
Black & Chrome
SIN753BKSS
Black & Stainless Steel
SIN753PWBS
White & Brushed Stainless
SIN753PWCH
White & Chrome
SIN753PWSS
White & Stainless Steel

Cover Plate

13A FCU Cover Plate
SCP250††



13A FCU Switched Cover Plate
SCP251††



13A FCU Switched with Neon Cover Plate
SCP252††



13A FCU with Neon Cover Plate
SCP253††



Standards: BS 1363 and BS 1362 (fuse)
Back Box Depth: 35mm Minimum **Cable Size:** 3 x 2.5mm² or 2 x 4mm²
Dimensions: **1 Gang:** (86mm x 86mm x 4mm)

Understanding the code:
SIN - Insert Prefix **036** - Product No **BK** - Insert Colour **SS** - 'INGOT' Switch Finish (if applicable).
SCP - Definity™ Cover Plate Prefix **436** - Product No **SS** - Plate Colour. PW and BK are also available, produced from polycarbonate.
BS Brushed Stainless, **CH** Polished Chrome, **SS** Stainless Steel, **PW** White, **BK** Black

Insert Design



13A Fused Connection Unit with Flex Outlet



13A Fused Connection Unit, Double Pole Switched with Flex Outlet



13A Fused Connection Unit, Double Pole Switched with Flex Outlet & Neon



13A Fused Connection Unit with Flex Outlet & Neon

Select either a Standard or Ingot Insert

Lockable	Lockable	Lockable	Lockable
Standard Insert	**Standard Insert**	**Standard Insert**	**Standard Insert**
SIN250BK - Black	SIN251BK - Black	SIN252BK - Black	SIN253BK - Black
SIN250PW - White	SIN251PW - White	SIN252PW - White	SIN253PW - White

Cover Plate

13A FCU with Flex Outlet Cover Plate
SCP350††



13A FCU Switched with Flex Outlet Cover Plate
SCP351††



13A FCU Switched with Flex Outlet & Neon Cover Plate
SCP352††



13A FCU with Flex Outlet & Neon Cover Plate
SCP353††



Standards: BS 1363 and BS 1362 (fuse)
Back Box Depth: 35mm Minimum **Cable Size:** 3 x 2.5mm² or 2 x 4mm²
Dimensions: 1 Gang: (86mm x 86mm x 4mm)

Understanding the code:
SIN - Insert Prefix **036** - Product No **BK** - Insert Colour **SS** - 'INGOT' Switch Finish (if applicable).
SCP - Definity™ Cover Plate Prefix **436** - Product No **SS** - Plate Colour. PW and BK are also available, produced from polycarbonate.
BS Brushed Stainless, **CH** Polished Chrome, **SS** Stainless Steel, **PW** White, **BK** Black

Insert Design



13A Fused Connection Unit



13A Fused Connection Unit, Double Pole Switched



13A Fused Connection Unit, Double Pole Switched with Neon



13A Fused Connection Unit with Neon

Select either a Standard or Ingot Insert

Lockable	Lockable	Lockable	Lockable
Standard Insert	**Standard Insert**	**Standard Insert**	**Standard Insert**
SIN850BK - Black	SIN851BK - Black	SIN852BK - Black	SIN853BK - Black
SIN850PW - White	SIN851PW - White	SIN852PW - White	SIN853PW - White

Cover Plate

13A FCU Cover Plate
SCP450††



13A FCU Switched Cover Plate
SCP451††



13A FCU Switched with Neon Cover Plate
SCP452††



13A FCU with Neon Cover Plate
SCP453††



Standards: BS 1363 and BS 1362 (fuse)
Back Box Depth: 35mm Minimum **Cable Size:** 3 x 2.5mm² or 2 x 4mm²
Dimensions: **1 Gang:** (86mm x 86mm x 4mm)

Understanding the code:
SIN - Insert Prefix **036** - Product No **BK** - Insert Colour **SS** - 'INGOT' Switch Finish (if applicable).
SCP - Definity™ Cover Plate Prefix **436** - Product No **SS** - Plate Colour. PW and BK are also available, produced from polycarbonate.
BS Brushed Stainless, **CH** Polished Chrome, **SS** Stainless Steel, **PW** White, **BK** Black

Insert Design



3A Fused Connection Unit with Flex Outlet



3A Fused Connection Unit Double Pole Switched with Flex Outlet



45A Double Pole Switch (Single Plate)



45A Double Pole Switch with Neon (Single Plate)

Select either a Standard or Ingot Insert

Lockable

Standard Insert
SIN249RD - Red

Lockable

Standard Insert
SIN256RD - Red

Standard Insert
SIN200BK - Black
SIN200PW - White

Ingot Switch Insert
SIN500BKBS
Black & Brushed Stainless
SIN500BKCH
Black & Chrome
SIN500BKSS
Black & Stainless Steel
SIN500PWBS
White & Brushed Stainless
SIN500PWCH
White & Chrome
SIN500PWSS
White & Stainless Steel

Standard Insert
SIN201BK - Black
SIN201PW - White

Ingot Switch Insert
SIN501BKBS
Black & Brushed Stainless
SIN501BKCH
Black & Chrome
SIN501BKSS
Black & Stainless Steel
SIN501PWBS
White & Brushed Stainless
SIN501PWCH
White & Chrome
SIN501PWSS
White & Stainless Steel

Cover Plate

13A FCU with Flex Outlet Cover Plate
SCP350††



Red (RD) Finish Available

13A FCU Switched with Flex Outlet Cover Plate
SCP351††



Red (RD) Finish Available

45A Switch Cover Plate
SCP200††



45A Switch with Neon Cover Plate
SCP201††



Standards: BS1363 and BS1362 (Fuse) **249, 256:** BS 1363 **200, 201:** BS EN 60669
Back Box Depth: 249, 256: 35mm Minimum **200, 201:** 47mm **Cable Size: 45A:** 1x16mm² **13A:** 3 x 2.5mm² or 2 x 4mm²
Dimensions: 1 Gang: (86mm x 86mm x 4mm)

Understanding the code:
SIN - Insert Prefix **036** - Product No **BK** - Insert Colour **SS** - 'INGOT' Switch Finish (if applicable).
SCP - Definity™ Cover Plate Prefix **436** - Product No **SS** - Plate Colour. PW and BK are also available, produced from polycarbonate.
BS Brushed Stainless, **CH** Polished Chrome, **SS** Stainless Steel, **PW** White, **BK** Black

Insert Design



45A Double Pole Switch (Vertical Double Plate)



45A Double Pole Switch with Neon (Vertical Double Plate)



45A Double Pole Switch with 13A Double Pole Switched Socket Outlet



45A Double Pole Switch with 13A Double Pole Switched Socket Outlet & Neons

Select either a Standard or Ingot Insert

Standard Insert
SIN202BK - Black
SIN202PW - White

Ingot Switch Insert
SIN502BKBS
Black & Brushed Stainless
SIN502BKCH
Black & Chrome
SIN502BKSS
Black & Stainless Steel
SIN502PWBS
White & Brushed Stainless
SIN502PWCH
White & Chrome
SIN502PWSS
White & Stainless Steel

Standard Insert
SIN203BK - Black
SIN203PW - White

Ingot Switch Insert
SIN503BKBS
Black & Brushed Stainless
SIN503BKCH
Black & Chrome
SIN503BKSS
Black & Stainless Steel
SIN503PWBS
White & Brushed Stainless
SIN503PWCH
White & Chrome
SIN503PWSS
White & Stainless Steel

Standard Insert
SIN204BK - Black
SIN204PW - White

Ingot Switch Insert
SIN504BKBS
Black & Brushed Stainless
SIN504BKCH
Black & Chrome
SIN504BKSS
Black & Stainless Steel
SIN504PWBS
White & Brushed Stainless
SIN504PWCH
White & Chrome
SIN504PWSS
White & Stainless Steel

Standard Insert
SIN205BK - Black
SIN205PW - White

Ingot Switch Insert
SIN505BKBS
Black & Brushed Stainless
SIN505BKCH
Black & Chrome
SIN505BKSS
Black & Stainless Steel
SIN505PWBS
White & Brushed Stainless
SIN505PWCH
White & Chrome
SIN505PWSS
White & Stainless Steel

Cover Plate

45A Switch Vertical Double Cover Plate SCP202††



45A Switch Vertical Double Cover Plate with Neon SCP203††



45A Switch with Switch Socket Outlet Cover Plate
SCP204††



45A Switch with Switch Socket Outlet with Neons Cover Plate
SCP205††



Standards: BS EN 60669, BS 4177
Back Box Depth: 47mm Minimum **Cable Size:** **45A:** 1x16mm²
Dimensions: **1 Gang:** (86mm x 86mm x 4mm), **2 Gang:** (146mm x 86mm x 4mm)

Understanding the code:
SIN - Insert Prefix **036** - Product No **BK** - Insert Colour **SS** - 'INGOT' Switch Finish (if applicable).
SCP - Definity™ Cover Plate Prefix **436** - Product No **SS** - Plate Colour. PW and BK are also available, produced from polycarbonate.
BS Brushed Stainless, **CH** Polished Chrome, **SS** Stainless Steel, **PW** White, **BK** Black

Insert Design



1 Gang
Blank Plate



2 Gang
Blank Plate



Single RJ11 Telephone
Outlet (US/Irish)

Select a Standard Insert

Standard Insert
SIN060BK - Black
SIN060PW - White

Standard Insert
SIN061BK - Black
SIN061PW - White

Standard Insert
SIN115BK - Black
SIN115PW - White

Cover Plate

1 Gang Blank
Cover Plate
SCP060††



2 Gang Blank
Cover Plate
SCP061††



Single RJ11 Socket Outlet
Cover Plate
SCP115††



Back Box Depth: 35mm Minimum
Dimensions: 1 Gang: (86mm x 86mm x 4mm) **2 Gang:** (146mm x 86mm x 4mm)

Understanding the code:
SIN - Insert Prefix **036** - Product No **BK** - Insert Colour **SS** - 'INGOT' Switch Finish (if applicable).
SCP - Definity™ Cover Plate Prefix **436** - Product No **SS** - Plate Colour. PW and BK are also available, produced from polycarbonate.
BS Brushed Stainless, **CH** Polished Chrome, **SS** Stainless Steel, **PW** White, **BK** Black

Insert Design



Single Telephone Master



Single Telephone Secondary



Twin Telephone Master



Twin Telephone Secondary

Select a Standard Insert

Standard Insert
SIN120BK - Black
SIN120PW - White

Standard Insert
SIN125BK - Black
SIN125PW - White

Standard Insert
SIN121BK - Black
SIN121PW - White

Standard Insert
SIN126BK - Black
SIN126PW - White

Cover Plate

Single Telephone Outlet Cover Plate
SCP120††



Twin Telephone Outlet Cover Plate
SCP121††



Back Box Depth: 25mm Minimum
Dimensions: 1 Gang: (86mm x 86mm x 4mm)

Understanding the code:
SIN - Insert Prefix **036** - Product No **BK** - Insert Colour **SS** - 'INGOT' Switch Finish (if applicable).
SCP - Definity™ Cover Plate Prefix **436** - Product No **SS** - Plate Colour. PW and BK are also available, produced from polycarbonate.
BS Brushed Stainless, **CH** Polished Chrome, **SS** Stainless Steel, **PW** White, **BK** Black

Insert Design



Single Coaxial Socket Outlet (Unshielded)



Single 'Isolated' Coaxial Socket Outlet (Unshielded)



Single Satellite 'F' Outlet (Unshielded)

Select a Standard Insert

Standard Insert
SIN065BK - Black
SIN065PW - White

Standard Insert
SIN158BK - Black
SIN158PW - White

Standard Insert
SIN156BK - Black
SIN156PW - White

Cover Plate

Single Coaxial / Satellite Outlet Cover Plate
SCP231††



Back Box Depth: 25mm Minimum
Dimensions: 1 Gang: (86mm x 86mm x 4mm)

Understanding the code:
SIN - Insert Prefix **036** - Product No **BK** - Insert Colour **SS** - 'INGOT' Switch Finish (if applicable).
SCP - Definity™ Cover Plate Prefix **436** - Product No **SS** - Plate Colour. PW and BK are also available, produced from polycarbonate.
BS Brushed Stainless, **CH** Polished Chrome, **SS** Stainless Steel, **PW** White, **BK** Black

Insert Design



Twin Coaxial Socket Outlet (Unshielded)



Twin 'Isolated' Coaxial Socket Outlet (Unshielded)



'Isolated' Coaxial & Satellite 'F' Socket Outlet (Unshielded)



'Non-Isolated' Coaxial & Satellite 'F' Socket Outlet (Unshielded)

Select a Standard Insert

Standard Insert	Standard Insert	Standard Insert	Standard Insert
SIN066BK - Black	SIN159BK - Black	SIN157BK - Black	SIN170BK - Black
SIN066PW - White	SIN159PW - White	SIN157PW - White	SIN170PW - White

Cover Plate

Twin Coaxial / Satellite Outlet Cover Plate

SCP232††



Back Box Depth: 25mm Minimum
Dimensions: 1 Gang: (86mm x 86mm x 4mm)

Understanding the code:
SIN - Insert Prefix **036** - Product No **BK** - Insert Colour **SS** - 'INGOT' Switch Finish (if applicable).
SCP - Definity™ Cover Plate Prefix **436** - Product No **SS** - Plate Colour. PW and BK are also available, produced from polycarbonate.
BS Brushed Stainless, **CH** Polished Chrome, **SS** Stainless Steel, **PW** White, **BK** Black


Insert Design



Single Plate Single New Media™ Module Aperture



Single Plate Twin New Media™ Module Aperture



Double Plate Quad New Media™ Module Aperture

Select a Standard Insert

Standard Insert
SIN310BK

Standard Insert
SIN311BK

Standard Insert
SIN312BK

Cover Plate

Single Plate Single New Media™ Module Aperture Cover Plate
SCP310††



Single Plate Twin New Media™ Module Aperture Cover Plate
SCP311††



Double Plate Quad New Media™ Module Aperture Cover Plate
SCP312††



Back Box Depth: Dependant on module used.
Dimensions: **1 Gang:** (86mm x 86mm x 4mm), **2 Gang:** (146mm x 86mm x 4mm)

Understanding the code:
SIN - Insert Prefix **036** - Product No **BK** - Insert Colour
SCP - Definity™ Cover Plate Prefix **436** - Product No **SS** - Plate Colour. PW and BK are also available, produced from polycarbonate.
BS Brushed Stainless, **CH** Polished Chrome, **SS** Stainless Steel, **PW** White, **BK** Black



WA092



SP640



WA094



WA095



WA099



WA102

essentials™

For the complete range of back boxes see Essentials™ page m4.

Galvanised Steel Back Boxes

WA092	1 Gang 16mm Deep Galvanised Steel K.O. Box
WA093	1 Gang 25mm Deep Galvanised Steel K.O. Box
WA094	2 Gang 25mm Deep Galvanised Steel K.O. Box
WA095	1 Gang 35mm Deep Galvanised Steel K.O. Box
WA096	2 Gang 35mm Deep Galvanised Steel K.O. Box
WA097	1 Gang 47mm Deep Galvanised Steel K.O. Box
WA098	2 Gang 47mm Deep Galvanised Steel K.O. Box
WA099	1 + 1 35mm Deep Dual Accessory Box
WA102	1 + 2 35mm Deep Dual Accessory Box

Longer Fixing Screws

SP640BN	Define® 3.5mm Dia. 40mm Long Screws (Bag 100)
SP640CH	Define® 3.5mm Dia. 40mm Long Screws (Bag 100)

Screws available in Black Nickel (BN) and Chrome (CH)



WA106P



WA107P



GA100



WA4135



WA4247

essentials™

For the complete range of back boxes see Essentials™ page m7.

Dry Lining Boxes

WA087P	1 Gang 35mm Deep Dry Lining Box
WA088P	2 Gang 35mm Deep Dry Lining Box
WA106P	1 Gang 47mm Deep Dry Lining Box
WA107P	2 Gang 47mm Deep Dry Lining Box
WA108P	Round Ceiling 34mm Deep Dry Lining Box

FlameGuard® Dry Lining Boxes

WA4135	1 Gang 35mm Deep FlameGuard® Dry Lining Box
WA4235	2 Gang 35mm Deep FlameGuard® Dry Lining Box
WA4147	1 Gang 47mm Deep FlameGuard® Dry Lining Box
WA4247	2 Gang 47mm Deep FlameGuard® Dry Lining Box

'Ezylink' Dry Lining Box Connector

GA100	'Ezylink' Dry Lining Box Connector

FlameGuard® back boxes have been tested and conform to both fire and acoustic BS EN 1364-1:2015 Acoustic: BS EN ISO 10140-2: 2010
Complies with Building Regulations
Fire tested up to 90 minutes with the capability of the boxes being mounted back to back.

MODE®

Ergonomic Electrical Accessories





MODE®

A Stylish, Contemporary & Flexible Range of Smooth Profile Wiring Accessories

Contents

Switches	**f5**
Back Boxes	**f9**
Power Socket Outlets	**f12**
13A Fused Connection Units	**f16**
Control Switches	**f17**
Ceiling Accessories	**f21**
Socket & Blank Plates	**f22**
Telephone & Data Sockets	**f24**
TV & Satellite	**f25**
New Media™ Plates	**f26**
Pattress Boxes	**f27**
Dry Lining Boxes	**f28**

There are many crucial elements of any interior design – the more obvious ones are décor and furnishings. Less obvious but no less important are electrical accessories; particularly wall accessories which, by their very nature need to be located in prominent line of sight positions.

When selecting wiring accessories designers have often compromised their schemes as they have been unable to identify a suitably flexible solution to satisfy their ideas.

Mode® accessories can now provide that flexibility with a comprehensive selection of products ranging from the humble light switch and socket outlet through to more specialised products dealing with the very latest developments in telephone and satellite products.



Antimicrobial Certified Products

All white moulded and Mode® Part M™ wiring accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products independently tested achieved a 99.99% kill off rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella and Klebsiella Pneumoniae.

Mode® accessories have been conceived and developed as a high quality, flexible and modern solution to virtually any domestic wiring requirement. The smooth, modern lines of the Mode® accessory plate will fit easily into traditional and contemporary designs alike. The modular design of Mode® allows designers and installers unprecedented flexibility in creating dedicated wiring solutions to deal specifically with actual wiring needs. In other words, there is now no need to compromise Mode® accessories provide the complete solution to modern wiring needs.

20 YEAR
No Quibble Guarantee

All Mode® accessories are covered by our straight forward 'No Quibble Guarantee' against any fault in materials or manufacture experienced at any time within 20 years of the date of supply.

Screw Caps

All Mode® accessories are supplied with screw caps as standard, offering you a protective and decorative option should you wish to use them.







Switches

10AX Plate Switches (Modular)
10AX Architrave Switches (Modular)
Dimmer Switches | Control Switches
45A Switches | 50A Pull Switch


The range of Mode® switches described in the following pages has been developed largely as a modular range based on the large selection of Polar™ white coloured switch modules available in the Minigrid™ module range - see opposite page.

These same modules are fully interchangeable in other Click® accessory ranges such as Metal Clad, Deco® & Define® decorative metal as well as the Polar™ moulded range.

Simple, single screw fixing of modules offers the simplest possible means of installing and replacing modules.

Dedicated media transfer plates and modules are dealt with in the later pages of this catalogue in the New Media™ section.

MINIGRID®





The products illustrated in this section of the catalogue are finished plates and unfurnished mounting plates.


For comprehensive information on the full range of modules available please refer to our Minigrid™ product brochure.




CMA010/CMA011



CMA012



CMA013



CMA9014



CMA019



CMA105



CMA811 / CMA828



CMA812



CMA813

MINIGRID® For the complete range of Minigrid™ modules, see the dedicated Minigrid™ section, page j18.

Plates Switches - MiniGrid™

CMA010	10AX 1 Gang 1 Way Plate Switch
CMA011	10AX 1 Gang 2 Way Plate Switch
CMA012	10AX 2 Gang 2 Way Plate Switch
CMA013	10AX 3 Gang 2 Way Plate Switch
CMA019	10AX 4 Gang 2 Way Plate Switch
CMA105	10AX 6 Gang 2 Way Plate Switch

Switch modules interchangeable with Minigrid™ modules in Polar™ white (PW) finish.

Wide Rocker Switches - Non Modular

CMA811	10AX 1 Gang 2 Way Wide Rocker Switch
CMA812	10AX 2 Gang 2 Way Wide Rocker Switch
CMA813	10AX 3 Gang 2 Way Wide Rocker Switch
CMA825	10AX 1 Gang Wide Rocker Intermediate Switch
CMA828	10AX 1 Gang 2 Way Wide Rocker Retractive Switch

Plates Switches - Non Modular

CMA9014	10AX 4 Gang 2 Way Single Plate Switch

Standards: BS EN 60669
Back Box Depth: 16mm Minimum **Cable Size:** 4 x 1.5mm² / 2 x 2.5mm² / 1 x 6mm² Maximum
Dimensions: **1 Gang:** (86mm x 86mm x 9.5mm), **2 Gang:** (146mm x 86mm x 9.5mm)



CMA025



CMA026




CMA171



CMA172



CMA027



CMA110

MINIGRID® For the complete range of Minigrid™ modules, see the dedicated Minigrid™ section, page j18.

Plates Switches

CMA025	10AX 1 Gang Intermediate Plate Switch
CMA026	10AX 1 Gang 2 Way Key Switch
CMA027	10AX 1 Gang 1 Way Retractive 'Bell' Switch
CMA110	10AX 1 Gang DP 'Emergency Test' Key Switch

Switch modules interchangeable with Minigrid™ modules in Polar™ white (PW) finish.

Architrave Switches - MiniGrid™

CMA171	10AX 1 Gang 2 Way Architrave Switch
CMA172	10AX 2 Gang 2 Way Architrave Switch

Mode® architrave plates are suitable for flush mounting using the WA671 and WA671 steel knock out boxes or for surface mounting the dedicated architrave back boxes CMA175 & CMA176 can be used.

The architrave switch plates will not accept MD070 & MD075 3 position switch modules.

Standards: BS EN 60669
Back Box Depth: 16mm Minimum **Cable Size:** 4 x 1.5mm² / 2 x 2.5mm² / 1 x 6mm²
Dimensions: **1 Gang:** (86mm x 86mm x 9.5mm), **171:** (85mm x 30mm x 9.5mm), **172:** (145mm x 30mm x 9.5mm)



CMA401



CMA402



CMA403



CMA404



CMA406



CMA426



CMA432


MINIGRID® For the complete range of Minigrid™ modules, see the dedicated Minigrid™ section, page j18.

Unfurnished Plates - MiniGrid™

CMA401	1 Gang MiniGrid™ Unfurnished Plate - 1 Aperture
CMA402	1 Gang MiniGrid™ Unfurnished Plate - 2 Apertures
CMA403	1 Gang MiniGrid™ Unfurnished Plate - 3 Apertures
CMA404	2 Gang MiniGrid™ Unfurnished Plate - 2 x 2 Apertures
CMA406	2 Gang MiniGrid™ Unfurnished Plate - 2 x 3 Apertures
CMA426	2 Gang MiniGrid™ Unfurnished Plate - 6 In-Line Apertures
CMA432	2 Gang MiniGrid™ Unfurnished Plate - 3 Apertures

Switch modules interchangeable with Minigrid™ modules in Polar™ white (PW) finish.

Back Box Depth: Dependant on modules used **Cable Size:** Dependant on modules used
Dimensions: 1 Gang: (86mm x 86mm x 9.5mm), **2 Gang:** (146mm x 86mm x 9.5mm)



CMA612



CMA618



MINIGRID®

The furnished plate shown here contains a selection of both single and twin width Minigrid™ modules. The yoke 'GR101' is supplied enabling Minigrid™ modules to be mounted prior to assembling the front plate.

MINIGRID® GR101 yokes supplied complete with the frontplate. Also available as a spare.
For the complete range of Minigrid™ modules, see the dedicated Minigrid™ section, page j18.

2 Tier Unfurnished Plates - MiniGrid™

CMA612 2 Tier MiniGrid™ Unfurnished Plate & Yokes - 12 Apertures - Mode®

3 Tier Unfurnished Plates - MiniGrid™

CMA618 3 Tier MiniGrid™ Unfurnished Plate & Yokes - 18 Apertures - Mode®

Decorative Finished Deco® Victorian Plate Finishes Also Available.
Switch modules interchangeable with Minigrid™ modules in Polar™ white (PW) finish.

Back Box Depth: 47mm Minimum **Cable Size:** Dependant on module used
Dimensions: **12 Module:** (146mm x 153mm x 9.5mm) **18 Module:** (143mm x 214mm x 9.5mm)



WA512



WA518

MINIGRID® Galvanised steel back boxes supplied for flush mounting of the large Minigrid™ plates.

Galvanised Steel Back Boxes

WA512 2 Tier 47mm Deep K.O. Box
WA518 3 Tier 47mm Deep K.O. Box

Dimensions: WA512: 137mm x 137mm **WA518:** 137mm x 197mm



CMA140, CMA145, CMA145PL



CMA146, CMA146PL



CMA147, CMA147PL



CMA148, CMA148PL

Dimmer Modules

MD9010	1-10V Analogue Dimmer Module (25 x 62mm)
MD9001	6A 2 Way Push On/Off (Non-Dimming) Module (25 x 62mm)
MD9022	250W 2 Way Dimmer Module (25 x 62mm)
MD9042	400W 2 Way Dimmer Module (25 x 62mm)
MD9014	100W Dual Mode Dimmer Module with Trim (26.5 x 55mm)
SP900	Dimmer M10 Nut Runner Tool



MD9001

We recommend the use of branded halogen lamps with all Mode® dimmers. The use of inferior, non-branded lamps may require the nominal rating of the dimmer to be reduced. These dimmer switches have not been designed for use with LED lamps. However, they may be suitable for some good quality LED lamps. For further information please contact the Click® technical support team.

Dimmer Switches

CMA140	1 Gang 2 Way 400Va Dimmer Switch
CMA145	1 Gang 2 Way 250Va Dimmer Switch
CMA146	2 Gang 2 Way 250Va Dimmer Switch
CMA147	3 Gang 2 Way 250Va Dimmer Switch
CMA148	4 Gang 2 Way 250Va Dimmer Switch

Dimmer Mounting Unfurnished Plates

CMA145PL	1 Gang Dimmer Plate & Knob (650W Max) - 1 Aperture
CMA146PL	2 Gang Dimmer Plate & Knobs (800W Max) - 2 Apertures
CMA147PL	3 Gang Dimmer Plate & Knobs (1200W Max) - 3 Apertures
CMA148PL	4 Gang Dimmer Plate & Knobs (1600W Max) - 4 Apertures

Use the nut runner SP900 to easily exchange dimmer modules and create customised dimmer switch plate.

Standards: BS EN 60669, BS EN 55015 **Type:** Leading Edge **MD9014:** Leading and trailing edge
Back Box Depth: 25mm Minimum **Cable Size:** 2 x 1.5mm²
Dimensions: **1 Gang:** (86mm x 86mm x 9.5mm), **2 Gang:** (146mm x 86mm x 9.5mm)

Power Socket Outlets, Fused Connection Units & Control Switches


All Mode® 13A sockets and fused connection units are tested and approved to BS1363 offering assured quality and safety.

The provision of large twin earth terminals on our Two Gang sockets and fused connection units greatly facilitates wiring and installation.


The Mode® range offers a solution for almost every possible design need and will enhance the décor of any area whether in a kitchen, bedroom, lounge or study etc...



13A Wall Socket Outlets | Round Pin
Wall Socket Outlets | Fused Connection Units
Fan Isolation Switches | DP Switches



CMA030 CMA630




CMA035 CMA635




CMA036



CMA037

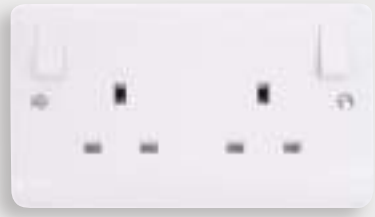

CMA836

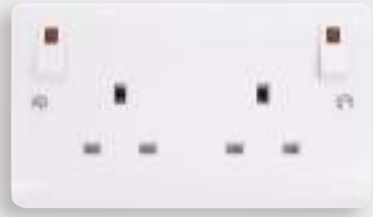

CMA840


Unswitched Socket Outlets

CMA030	13A 1 Gang Unswitched Socket
CMA032	13A 2 Gang Unswitched Socket

Switched Socket Outlets

CMA035	13A 1 Gang DP Switched Socket
CMA036	13A 2 Gang DP Switched Socket
CMA037	13A 2 Gang DP Switched Clean Earth Socket
CMA630	13A 1 Gang Socket With Twin Earth Terminals
CMA635	13A 1 Gang DP Switched Socket With Twin Earth Terminals
CMA836	13A 2 Gang DP Switched Socket With Outboard Rockers
CMA840	13A 2 Gang DP Switched Socket With Outboard Rockers & Neons
CMA836PWRD	13A 2 Gang DP Switched Socket With Outboard Red Rockers

Standards: BS 1363
Back Box Depth: 25mm Minimum **Cable Size:** 4 x 2.5mm^2 / 2 x 4mm^2
Dimensions: **1 Gang:** (86mm x 86mm x 9.5mm), **2 Gang:** (146mm x 86mm x 9.5mm)



CMA1035 CMA1635




CMA1835



CMA1036



CMA1037

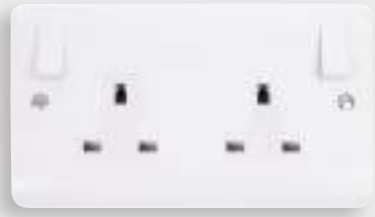

CMA1836



CMA1840


Safety Shutter Socket Outlets

CMA1035	13A 1 Gang DP 3 Pin Safety Shutter Switched Socket
CMA1036	13A 2 Gang DP 3 Pin Safety Shutter Switched Socket (Twin Earth)
CMA1037	13A 2 Gang DP 3 Pin Safety Shutter Switched Clean Earth Socket
CMA1635	13A 1 Gang DP 3 Pin Safety Shutter Switched Socket (Twin Earth)
CMA1835	13A 1 Gang DP 3 Pin Safety Shutter Switched Socket With Neon
CMA1836	13A 2 Gang DP 3 Pin Safety Shutter Switched Socket With Outboard Rockers (Twin Earth)
CMA1840	13A 2 Gang DP 3 Pin Safety Shutter Switched Socket With Outboard Rockers & Neons (Twin Earth)


Standards: BS 1363
Back Box Depth: 25mm Minimum **Cable Size:** 4 x 2.5mm² / 2 x 4mm²
Dimensions: **1 Gang:** (86mm x 86mm x 9.5mm), **2 Gang:** (146mm x 86mm x 9.5mm)



CMA034



CMA038



CMA039



CMA935
Non-standard socket



CMA936
Non-standard socket



PA380WH
Non-standard plug



CMA675

Round Pin Socket Outlets

CMA034	15A Switched Round Pin Socket
CMA038	5A Round Pin Socket
CMA039	2A Round Pin Socket

Lockable Socket

CMA675	13A 1G DP Key Lockable Socket With Neon

Non-Standard Socket Outlets


CMA935	13A 1 Gang DP Switched Non-Standard Socket
CMA936	13A 2 Gang DP Switched Non-Standard Socket

Non-Standard Resilient Plug Tops

PA380WH	13A Fused Non-Standard Plug - White
PA380RD	13A Fused Non-Standard Plug - Red

For use with non-standard Click® Mode sockets CMA935 and CMA936

Standards: BS 546, BS 1363 **675:** BS 1363-2, BS EN 60669-1
Back Box Depth: 25mm Minimum **675:** 35mm Minimum
Cable Size: **2A:** 2 x 2.5mm² / 3 x 1.5mm² **5A:** 2 x 2.5mm² / 3 x 1.5mm² **13A:** 4 x 2.5mm² / 2 x 4mm² **675:** 3 x 2.5mm², 2 x 4mm²
Dimensions: **1 Gang:** (86mm x 86mm x 9.5mm), **2 Gang:** (146mm x 86mm x 9.5mm)



CMA735



CMA736



CMA771U



CMA770



CMA780

Locating Plug Sockets

CMA735 13A 1 Gang DP Switched Locating Plug Socket
CMA736 13A 2 Gang DP Switched Locating Plug Socket With Outboard Rockers

Switched Sockets With USB Outlets

CMA771U 13A 1 Gang Switched Socket With 2.1A USB Outlet (Twin Earth)
CMA770 13A 2 Gang Switched Socket With 2.1A USB Outlet (Twin Earth)
CMA780 13A 2 Gang Switched Socket With Twin 2.1A USB Outlets (4.2A) (Twin Earth)

Standards: 735, 736: BS 1363, **770, 780, 771U:** BS1363-2: 2016 +A1: 2018, BS EN 62368-1 BS EN 62680-1-1
Back Box Depth: 25mm Minimum **Cable Size:** 4 x 2.5mm² / 2 x 4mm²
Dimensions: 1 Gang: (86mm x 86mm x 9.5mm), **2 Gang:** (146mm x 86mm x 9.5mm)



CMA649/ CMA650



CMA651



CMA652



CMA653



CMA049/CMA050



CMA051



CMA052



CMA053

Fused Connection Units With Optional Flex Outlet Through The Bottom

CMA049	3A Fused Connection Unit
CMA050	13A Fused Connection Unit
CMA051	13A Switched Fused Connection Unit
CMA052	13A Switched Fused Connection Unit With Neon
CMA053	13A Fused Connection Unit With Neon

Fused Connection Units Without Flex Outlet

CMA649	3A Fused Connection Unit
CMA650	13A Fused Connection Unit
CMA651	13A Switched Fused Connection Unit
CMA652	13A Switched Fused Connection Unit With Neon
CMA653	13A Fused Connection Unit With Neon

Standards: BS 1363 and BS 1362 (fuse)
Back Box Depth: 25mm Minimum **Cable Size:** 3 x 2.5mm² or 2 x 4mm²
Dimensions: **1 Gang:** (86mm x 86mm x 9.5mm)



CMA020



CMA021



CMA024



CMA620

Fan Isolation Switch

CMA020 10A 3 Pole Fan Isolation Switch
CMA021 10A 3 Pole Isolation Switch

20A DP Sink/Bath Switch

CMA024 20A DP Sink/Bath Switch With Neon

3 pole and 20A DP switches are non-modular

20A Keyfob Switch

CMA620 20A Keyfob Switch
SP940 Spare Keyfob For CMA620

Standards: BS EN 60669
Back Box Depth: 25mm Minimum **Cable Size:** 20A DP: 4 x 2.5mm² 10A 3P: 1 x 2.5mm² / 2 x 1.5mm²
Dimensions: **1 Gang:** (86mm x 86mm x 9.5mm)



CMA022



CMA023



CMA044



CMA046



CMA660



CMA622



CMA623



CMA040



CMA042

20A Control Switches With Optional Flex Outlet Through The Bottom

CMA022	20A DP Switch
CMA023	20A DP Switch With Neon
CMA044	20A DP 'Water Heater' Switch With Flex Outlet
CMA046	20A DP 'Water Heater' Switch With Flex Outlet & Neon

Lockable Switch

CMA660	20A Double Pole Key Lockable Switch

20A Control Switch Without Flex Outlet

CMA622	20A DP Switch
CMA623	20A DP Switch With Neon
CMA040	20A DP 'Water Heater' Switch
CMA042	20A DP 'Water Heater' Switch With Neon

Standards: BS EN 60669 **660:** BS 1363-2, BS EN 60669-1
Back Box Depth: 25mm Minimum **660:** 35mm Minimum **Cable Size:** 4 x 2.5mm² **660:** 3 x 2.5mm², 2 x 4mm²
Dimensions: **1 Gang:** (86mm x 86mm x 9.5mm)




CMA200




CMA201



CMA202

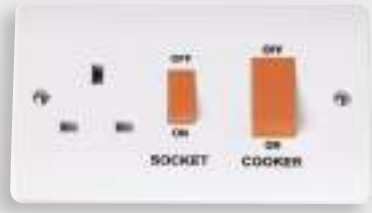

CMA204

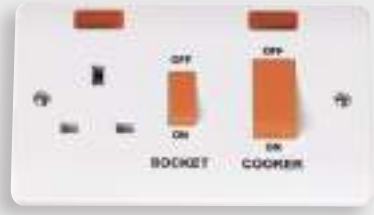

CMA205



CMA203

45A Switches

CMA200 45A 1 Gang DP Switch
CMA201 45A 1 Gang DP Switch With Neon
CMA202 45A 2 Gang DP Switch
CMA203 45A 2 Gang DP Switch With Neon

Cooker Control Units

CMA204 45A 2 Gang DP Switch With 13A DP Switched Socket
CMA205 45A 2 Gang DP Switch With 13A DP Switched Socket & Neons

Standards: BS 4177, BS EN 60669
Back Box Depth: 35mm Minimum **Cable Size:** 45A: 1 x 16mm²
Dimensions: **1 Gang:** (86mm x 86mm x 9.5mm), **2 Gang:** (146mm x 86mm x 9.5mm)



CMA500



CMA501



CMA502



CMA504



CMA505



CMA503

45A Switches - White Rockers

CMA500 45A 1 Gang DP Switch With White Rocker
CMA501 45A 1 Gang DP Switch With White Rocker & Neon
CMA502 45A 2 Gang DP Switch With White Rocker
CMA503 45A 2 Gang DP Switch With White Rocker & Neon

Cooker Control Units - White Switches

CMA504 45A 2 Gang DP Switch With 13A DP Switched Socket & White Rockers
CMA505 45A 2 Gang DP Switch With 13A DP Switched Socket, White Rockers & Neons

Standards: BS EN 60669, BS 4177
Back Box Depth: 35mm Minimum **Cable Size:** 45A: 1 x 16mm²
Dimensions: **1 Gang:** (86mm x 86mm x 9.5mm), **2 Gang:** (146mm x 86mm x 9.5mm)



PRW208



PRW210/
PRW211



PRC009



CMA213



PRC210



PRW213



PRC216

essentials™ Decorative covers available for PRC210, see Essentials™ page m28

Pull Cord Switches

PRW208	10A 3 Pole Fan Isolation Pull Cord Switch
PRW210	45A DP Pull Cord Switch With Mechanical 'On/Off' & Neon
PRW211	50A DP Pull Cord Switch With Mechanical 'On/Off' & Neon
PRW213	50A DP Round Pull Cord Switch With Mechanical 'On/Off', Neon & Pattress
CMA213	50A DP Round Pull Cord Switch With Mechanical 'On/Off', Neon & Pattress

Pull Cord Switches

PRC009	10AX 2 Way Ceiling Pull Cord Switch
PRC210	10AX 2 Way Pull Cord Switch
PRC216	16A DP Pull Cord Switch With Neon

Standards: BS EN 60669
Cable Size: **009, 208, 210:** 3 x 2.5mm² / 1 x 6mm² **211:** 2 x 6mm² / 1 x 25mm² **213:** 2 x 6mm² / 1 x 25mm² **216:** 3 x 1.5mm² / 2 x 2.5mm²
Dimensions: **PRC009:** 75.5mm Dia. x 43.5mm **PRC210/216:** 70mm Dia. x 42mm **PRW208:** 86mm x 86mm x 43mm
PRW210/211: 86mm x 86mm x 43mm **PRW213:** 100mm Dia. x 77mm



CMA215



PRW217



CMA060



CMA100

Click® dual voltage shaver outlets incorporate a double wound isolating transformer rated 20Va at 230V or 115V and meets BS EN 61558-2-5: 2010 making it safe for use in bathrooms. Shaver outlet is not continuously rated and therefore not suitable for use as a permanent charging outlet

Flex Outlet Plates

CMA017 20A Flex Outlet Plate

45A Cooker Connection Plates

CMA215 45A 1 Gang Cooker Connection Plate

45A Cooker Outlet Plates

PRW217 45A Easyfit Dual Appliance Outlet Plate

Pattress Box for PRW217 - Urea

PRW218 35mm Deep Pattress Box For Use With PRW217

Dual Voltage Shaver Socket

CMA100 115/230V Dual Voltage Shaver Socket

Blank Plates

CMA060 1 Gang Blank Plate
CMA061 2 Gang Blank Plate

Standards: 100: BS EN 61558 017/215/217: BS 5733
Back Box Depth: **017:** 16mm min **100:** 47mm min **215:** 35mm min **217:** 25mm min
Cable Size: **215:** 2 x 10mm² **100:** 2 x 1.5mm² / 1 x 2.5mm² **017:** 1 x 6mm² / 4 x 2.5mm² **217:** 1 x 10mm²
Dimensions: **215:** 86mm x 86mm x 22.5mm **217:** 84mm x 130mm x 27mm

TV, Telephone & Data Sockets

Providing the means to facilitate the connection of modern communications equipment is as important today as it is to provide the electrical power to operate them.

This section of the catalogue is devoted to the New Media™ range of plate accessories which includes products for connecting telephone, computer, television and satellite devices.



RJ11 Outlet | UK Telephone Outlets
Satellite Socket Outlets | Coaxial Sockets



CMA115 / CMA131



CMA132



CMA122 / CMA127



CMA119 / CMA124

RJ11 Telephone Outlet

CMA115 Single RJ11 (Irish/US) Outlet

RJ45 Data Outlets

CMA131 Single RJ45 Cat-5e Outlet
CMA132 Twin RJ45 Cat-5e Outlet

Telephone Outlets

CMA119 Single Telephone Outlet - Master
CMA122 Twin Telephone Outlet - Master
CMA124 Single Telephone Outlet - Secondary
CMA127 Twin Telephone Outlet - Secondary

Twin outlets are 2 separate sockets and not internally linked together.

Back Box Depth: 25mm Minimum **115:** 35mm Minimum **Termination Type:** IDC
Dimensions: 1 Gang: (86mm x 86mm x 9.5mm)



CMA065



CMA066



CMA156




CMA170



CMA157



CMA158



CMA159

Non-Isolated Coaxial Outlets (Unshielded)

CMA065 Single Coaxial Outlet
CMA066 Twin Coaxial Outlet

Satellite Outlets (Unshielded)


CMA157 Isolated Satellite & Isolated Coaxial Outlet
CMA170 Non-Isolated Satellite & Non-Isolated Coaxial Outlet
CMA156 Non-Isolated Single Satellite Outlet

Isolated Coaxial Outlets (Unshielded)


CMA158 Single Coaxial Outlet
CMA159 Twin Isolated Coaxial Outlet

Isolated outlets will filter out any interference, if a 2 way signal is required, i.e. for use with satellite hard wire extensions, then a non-isolated outlet is required.

Back Box Depth: 16mm Minimum
Dimensions: 1 Gang: (86mm x 86mm x 9.5mm)




CMA310

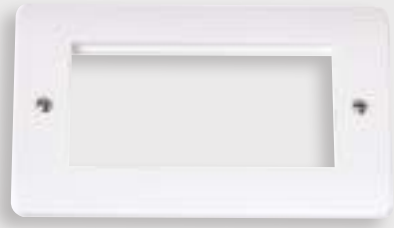

CMA312



CMA311



MM410BK MM405WH MM501BK MM440BK

new media™

For a complete range of New Media™ modules please see our dedicated New Media™ section.

Unfurnished Plates - New Media™

CMA310	1 Gang New Media™ Unfurnished Plate - 1 Aperture
CMA311	1 Gang New Media™ Unfurnished Plate - 2 Apertures
CMA312	2 Gang New Media™ Unfurnished Plate - 4 Apertures

Selecting from a range of module inserts covering all manner of media transfer, the installer will now be able to configure their own arrangement of TV, radio or satellite reception, plus speaker, telephone and data outlets. All modules can be inserted into single or double wall plates, fitted onto standard switch and socket boxes.

All New Media™ plates are suitable for use with standard euro module inserts.

Back Box Depth: Dependant on module used
Dimensions: **1 Gang:** (86mm x 86mm x 9.5mm), **2 Gang:** (146mm x 86mm x 9.5mm)


CMA080


CMA082


CMA083


CMA084


CMA089


CMA091


CMA175


CMA176

essentials™

For the complete range of back boxes see Essentials™ page m7.

Moulded Pattress Boxes

CMA080	1 Gang 16mm Deep Pattress Box With Earth Terminal
CMA081	1 Gang 25mm Deep Pattress Box
CMA082	2 Gang 25mm Deep Pattress Box
CMA083	1 Gang 35mm Deep Pattress Box
CMA084	2 Gang 35mm Deep Pattress Box
CMA085	1 Gang 47mm Deep Pattress Box With Earth Terminal
CMA086	2 Gang 47mm Deep Pattress Box Fitted With Cable Restraint & Earth Terminal
CMA089	Dual Accessory 29mm Deep Pattress Box With Earth Terminal

Converter Pattress Box

CMA091	1 Gang To 2 Gang 16mm Deep Converter Pattress

Architrave Pattress Boxes

CMA175	1 Gang 19mm Deep Architrave Pattress Box with Earth Terminal
CMA176	2 Gang 19mm Deep Architrave Pattress Box with Earth Terminal

For Mode® products only

PVC Pattress Boxes

CMA230	1 Gang 29mm Deep PVC Pattress Box - Trunking
CMA235	2 Gang 29mm Deep PVC Pattress Box - Trunking
CMA240	1 Gang 29mm Deep PVC Pattress Box - Conduit
CMA245	2 Gang 29mm Deep PVC Pattress Box - Conduit



WA095



WA102



WA106P



WA107P



GA100



WA4247

essentials™ For the complete range of back boxes see Essentials™ page m4.
For the complete range of FlameGuard® back boxes see Essentials™ page m8.

Galvanised Steel Back Boxes

WA092	1 Gang 16mm Deep Galvanised Steel K.O. Box
WA093	1 Gang 25mm Deep Galvanised Steel K.O. Box
WA094	2 Gang 25mm Deep Galvanised Steel K.O. Box
WA095	1 Gang 35mm Deep Galvanised Steel K.O. Box
WA096	2 Gang 35mm Deep Galvanised Steel K.O. Box
WA097	1 Gang 47mm Deep Galvanised Steel K.O. Box
WA098	2 Gang 47mm Deep Galvanised Steel K.O. Box
WA099	1 + 1 35mm Deep Dual Accessory Box
WA102	1 + 2 35mm Deep Dual Accessory Box
WA671	1 Gang 25mm Deep Architrave Box With 60.3mm Hole Centres
WA672	2 Gang 25mm Deep Architrave Box With 120.6mm Hole Centres

'Ezylink' Dry Lining Box Connector

GA100	'Ezylink' Dry Lining Box Connector

Dry Lining Boxes

WA087P	1 Gang 35mm Deep Dry Lining Box
WA088P	2 Gang 35mm Deep Dry Lining Box
WA106P	1 Gang 47mm Deep Dry Lining Box
WA107P	2 Gang 47mm Deep Dry Lining Box
WA108P	Round Ceiling 34mm Deep Dry Lining Box

FlameGuard® Dry Lining Boxes

WA4135	1 Gang 35mm Deep FlameGuard® Dry Lining Box
WA4235	2 Gang 35mm Deep FlameGuard® Dry Lining Box
WA4147	1 Gang 47mm Deep FlameGuard® Dry Lining Box
WA4247	2 Gang 47mm Deep FlameGuard® Dry Lining Box

polar™

A Premium Range of Bright White Accessories





polar™

A Premium Range of Bright White Accessories

Contents

Switches	g5
Back Boxes	g9
Power Socket Outlets	g12
13A Fused Connection Units	g14
Control Switches	g15
Ceiling Accessories	g18
Socket & Blank Plates	g20
Telephone & Data Sockets	g22
TV & Satellite	g23
New Media™ Plates	g24
Pattress Boxes	g25
Dry Lining Boxes	g26

The Polar™ range of domestic electrical accessories has been developed as a distinctly different range to the traditional Click® accessory range manufactured by Scolmore International Ltd.

The Polar™ range was born out of a desire to offer a bright white accessory product. Colour choice with accessories is no different to colour choice of wallpaper, paints or other internal decorations. Installers have very definite views on just which tone or shade of white is right for a particular installation.

Given the demand for a different accessory colour we took the opportunity to review all other aspects of the new range including technical features, materials used and the aesthetic appeal of the individual products. The net result is a product quite different in a number of ways to the established Click® product but still offering the same levels of high quality and competitive pricing. So confident are we of the durability and reliability of the Polar™ product that we guarantee these products against any fault in materials or manufacture for no less than 20 years.



Antimicrobial Certified Products

All white moulded and our Part M™ Range of wiring accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products independently tested achieved a 99.99% kill off rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella and Klebsiella Pneumoniae.

Polar™ accessories offer added value over the basic versions of similar products offered by our competitors and include the following:

- X rated modular plate switches – Polar™ light switches are all full 10AX rated switches of modular construction. The modular design allows installers infinite flexibility in devising customised switching arrangements. In fact the diversity of the types of modules available within the Polar™ range make this a true domestic grid system.
- Full certification on all 13A socket outlets and fused connection units. These products also feature twin earth terminals as standard.
- 45A shower switches are upgraded to 50A as standard so as to accommodate the growing demand for higher rated power showers.
- The sharp, crisp lines of the Polar™ plates are complemented by gently curved rockers on all switches plus modern grey backs and matching print to switches and plates alike. The modern feel of the Polar™ range is further enhanced by amber coloured neons throughout and matching amber switchgear on the 45A accessories. All neons are flush mounted.

20 YEAR
No Quibble Guarantee

All Polar™ accessories are covered by our straight forward 'No Quibble Guarantee' against any fault in materials or manufacture experienced at any time within 20 years of the date of supply.



Switches

10AX Plate Switches (Modular)
10AX Architrave Switches (Modular)
Dimmer Switches | Control Switches
45A Switches | 50A Pull Switch

A comprehensive selection of light switches, control switches, 45A and 50A switches are available for wall and ceiling mounting. All light switches are 10AX rated and are of modular construction. The wide range of modules available ranges from blanks, 1 way and 2 way, through intermediates, key switches and bell push, to 20A rated double pole switch modules.

All modules are simple 1 screw fixing and therefore offer the ultimate in flexibility when devising a custom made domestic grid installation. All Polar™ modules are fully interchangeable and can be used to replace existing modules or to furnish blank plates. In addition Polar™ modules can be used with all relevant items in the Click® moulded and metal ranges.

The gentle curve on the switch rocker of the module facilitates a smooth switching operation as well as providing a modern and distinctive design feature.

MINIGRID®





The products illustrated in this section of the catalogue are finished plates and unfurnished mounting plates.

For comprehensive information on the full range of modules available please refer to our Minigrid™ product brochure.



PRW010/PRW011




PRW012



PRW013




PRW019

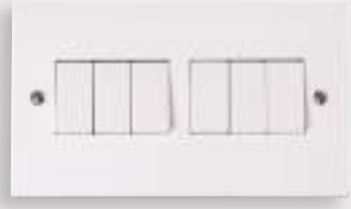


PRW105



PRW811



PRW812



PRW813

MINIGRID® For the complete range of Minigrid™ modules, see the dedicated Minigrid™ section, page j18.

Plates Switches - MiniGrid™

PRW010 10AX 1 Gang 1 Way Plate Switch
PRW011 10AX 1 Gang 2 Way Plate Switch
PRW012 10AX 2 Gang 2 Way Plate Switch
PRW013 10AX 3 Gang 2 Way Plate Switch
PRW019 10AX 4 Gang 2 Way Plate Switch
PRW105 10AX 6 Gang 2 Way Plate Switch

Switch modules interchangeable with Minigrid™ modules in Polar™ white (PW) finish.

Wide Rocker Switches - Non Modular

PRW811 10AX 1 Gang 2 Way Wide Rocker Switch
PRW812 10AX 2 Gang 2 Way Wide Rocker Switch
PRW813 10AX 3 Gang 2 Way Wide Rocker Switch

Standards: BS EN 60669
Back Box Depth: 16mm Minimum **Cable Size:** 4 x 1.5mm² / 2 x 2.5mm² / 1 x 6mm² Maximum
Dimensions: **1 Gang:** (86mm x 86mm x 11mm), **2 Gang:** (146mm x 86mm x 11mm)


PRW015


PRW025


PRW171


PRW172

MINIGRID® For the complete range of Minigrid™ modules, see the dedicated Minigrid™ section, page j18.

Plates Switches

PRW015	10AX 1 Gang 2 Way Paddle Switch
PRW025	10AX 1 Gang Intermediate Plate Switch

Switch modules interchangeable with Minigrid™ modules in Polar™ white (PW) finish.

Architrave Switches - MiniGrid™

PRW171	10AX 1 Gang 2 Way Architrave Switch
PRW172	10AX 2 Gang 2 Way Architrave Switch

Polar™ architrave plates are suitable for flush mounting using the WA671 and WA671 steel knock out boxes or for surface mounting the dedicated architrave back boxes PRW175 & PRW176 can be used.

The architrave switch plates will not accept MD070 & MD075 3 position switch modules.

Standards: BS EN 60669
Back Box Depth: 16mm Minimum **Cable Size:** 4 x 1.5mm² / 2 x 2.5mm² / 1 x 6mm² Maximum
Dimensions: **015, 025:** (86mm x 86mm x 11mm) **171:** (85mm x 30mm x 11mm) **172:** (145mm x 30mm x 11mm)



PRW401




PRW402



PRW403



PRW404

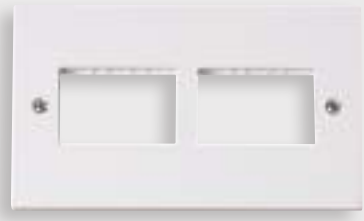

PRW406



PRW426



PRW432

MINIGRID® For the complete range of Minigrid™ modules, see the dedicated Minigrid™ section, page j18.

Unfurnished Plates - MiniGrid™


PRW401	1 Gang MiniGrid™ Unfurnished Plate - 1 Aperture
PRW402	1 Gang MiniGrid™ Unfurnished Plate - 2 Apertures
PRW403	1 Gang MiniGrid™ Unfurnished Plate - 3 Apertures
PRW404	2 Gang MiniGrid™ Unfurnished Plate - 2 x 2 Apertures
PRW406	2 Gang MiniGrid™ Unfurnished Plate - 2 x 3 Apertures
PRW426	2 Gang MiniGrid™ Unfurnished Plate - 6 In-Line Apertures
PRW432	2 Gang MiniGrid™ Unfurnished Plate - 3 Apertures

Utilises Polar™ white (PW) Minigrid™ modules.

Back Box Depth: Dependant on modules used
Dimensions: **1 Gang:** (86mm x 86mm x 11mm), **2 Gang:** (146mm x 86mm x 11mm)



PRW612

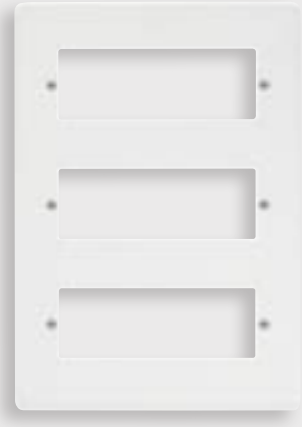

PRW618



MINIGRID®

The furnished plate shown here contains a selection of both single and twin width Minigrid™ modules. The yoke 'GR100' is required to mount the Minigrid™ modules into prior to assembling the frontplate.

MINIGRID® GR101 yokes supplied complete with the frontplate. Also available as a spare.
For the complete range of Minigrid™ modules, see the dedicated Minigrid™ section, page j18.

2 Tier Unfurnished Plates - MiniGrid™

PRW612 2 Tier MiniGrid™ Unfurnished Plate & Yokes - 12 Apertures - Polar™

3 Tier Unfurnished Plates - MiniGrid™

PRW618 3 Tier MiniGrid™ Unfurnished Plate & Yokes - 18 Apertures - Polar™

Decorative finished Deco® victorian plate finishes also available.

Back Box Depth: 47mm Minimum
Dimensions: **12 Module:** (146mm x 146mm x 11mm) **18 Module:** (146mm x 227mm x 11mm)



WA512



WA518

MINIGRID® Galvanised steel back boxes supplied for flush mounting of the large Minigrid™ plates.

Galvanised Steel Back Boxes

WA512 2 Tier 47mm Deep K.O. Box
WA518 3 Tier 47mm Deep K.O. Box

Dimensions: WA512: 137mm x 137mm **WA518:** 137mm x 197mm


PRW140 / 145


PRW146


SP900


MD9001


PRW147


PRW148

We recommend the use of branded halogen lamps with all Polar™ dimmers. The use of inferior, non-branded lamps may require the nominal rating of the dimmer to be reduced. These dimmer switches have not been designed for use with LED lamps. However, they may be suitable for some good quality LED lamps. For further information please contact the Click® technical support team.

Dimmer Modules

MD9001	6A 2 Way Push On/Off (Non-Dimming) Module (25 x 62mm)
MD9010	1-10V Analogue Dimmer Module (25 x 62mm)
MD9022	250W 2 Way Dimmer Module (25 x 62mm)
MD9042	400W 2 Way Dimmer Module (25 x 62mm)
MD9014	100W Dual Mode Dimmer Module with Trim (26.5 x 55mm)

Dimmer Switches

PRW140	1 Gang 2 Way 400Va Dimmer Switch
PRW145	1 Gang 2 Way 250Va Dimmer Switch
PRW146	2 Gang 2 Way 250Va Dimmer Switch
PRW147	3 Gang 2 Way 250Va Dimmer Switch
PRW148	4 Gang 2 Way 250Va Dimmer Switch
SP900	Dimmer M10 Nut Runner Tool

Use the nut runner SP900 to easily exchange dimmer modules and create customised dimmer switch plate.

Standards: BS EN 60669, BS EN 55015 **Type:** Leading Edge, **MD9014:** Leading & Trailing Edge
Back Box Depth: 25mm Minimum **Cable Size:** 2 x 1.5mm²
Dimensions: **1 Gang:** (86mm x 86mm x 11mm), **2 Gang:** (146mm x 86mm x 11mm)


Power Socket Outlets, Fused Connection Units & Control Switches

All socket outlets are tested and approved to BS1363. Socket outlets are available with single or double pole switches. Twin earth terminals are available on 1 and 2 gang socket outlets in order to comply with regulation 607 of BS7671 IEE Wiring Regulations. As with the plate switches, the actual switch rocker features a gentle curved appearance.






13A Wall Socket Outlets | USB Sockets | Round Pin Wall Socket Outlets | Fused Connection Units Fan Isolation Switches | DP Switches


PRW030/630



PRW030EX


PRW035/635


PRW032


PRW036


PRW037

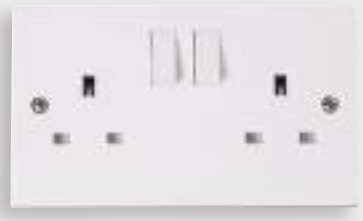
PRW606

Unswitched Socket Outlets

PRW030 13A 1 Gang Unswitched Socket
PRW030EX 13A 1 Gang Unswitched Socket - Printed 'Not To Be Used For Outdoor Appliances'
PRW032 13A 2 Gang Unswitched Socket

Switched Socket Outlets

PRW605 13A 1 Gang Switched Socket
PRW606 13A 2 Gang Switched Socket
PRW630 13A 1 Gang Unswitched Socket With Twin Earth Terminals
PRW635 13A 1 Gang DP Switched Socket With Twin Earth Terminals

PRW035 13A 1 Gang DP Switched Socket
PRW036 13A 2 Gang DP Switched Socket
PRW037 13A 2 Gang DP Switched Clean Earth Socket

Safety Shutter Socket Outlets

PRW1035 13A 1 Gang DP 3 Pin Safety Shutter Switched Socket
PRW1036 13A 2 Gang DP 3 Pin Safety Shutter Switched Socket (Twin Earth)
PRW1037 13A 2 Gang DP 3 Pin Safety Shutter Switched Clean Earth Socket
PRW1635 13A 1 Gang DP 3 Pin Safety Shutter Switched Clean Earth Socket

Standards: BS 1363
Back Box Depth: 25mm Minimum **Cable Size:** 4 x 2.5mm² / 2 x 4mm²
Dimensions: **1 Gang:** (86mm x 86mm x 11mm), **2 Gang:** (146mm x 86mm x 11mm)



PRW771U



PRW780



PRW034



PRW038



PRW039

Round Pin Socket Outlets

PRW034	15A Switched Round Pin Socket
PRW038	5A Round Pin Socket
PRW039	2A Round Pin Socket

Switched Sockets With USB Outlets

PRW771U	13A 1 Gang Switched Socket With 2.1A USB Outlet
PRW770	13A 2 Gang Switched Socket With 2.1A USB Outlet (Twin Earth)
PRW780	13A 2 Gang Switched Socket With Twin 2.1A USB Outlets (4.2A) (Twin Earth)

Standards: 034, 038, 039: BS 546 **770, 771U, 780:** BS1363-2: 2016 +A1: 2018, BS EN 62368-1, BS EN 62680-1-1
Cable Size: 2A: 2 x 2.5mm² / 3 x 1.5mm² **5A:** 2 x 2.5mm² / 3 x 1.5mm² **15A:** 4 x 2.5mm² / 1 x 6mm² / 1 x 10mm²
771U, 770: 4 x 2.5mm² / 2 x 4mm²
Back Box Depth: 25mm min.
Dimensions: 1 Gang: (86mm x 86mm x 11mm), **2 Gang:** (146mm x 86mm x 11mm)



PRW049/PRW050



PRW051



PRW052



PRW053

Fused Connection Units With Optional Flex Outlet

PRW049	3A Fused Connection Unit
PRW050	13A Fused Connection Unit
PRW051	13A Switched Fused Connection Unit
PRW052	13A Switched Fused Connection Unit With Neon
PRW053	13A Fused Connection Unit With Neon

Fused Control Switch Plates

PRW290	3A FCU With DP Switch (Linked)
PRW291	3A FCU With DP Switch & DP Fan Switch (Linked)

Standards: BS 1363 and BS 1362 (fuse)
Back Box Depth: 25mm Minimum **Cable Size:** 3 x 2.5mm² or 2 x 4mm²
Dimensions: **1 Gang:** (86mm x 86mm x 11mm)



PRW020



PRW291



PRW023



PRW024



PRW040



PRW042



PRW660



PRW675

20A Control Switches with Optional Flex Outlet

PRW022 20A DP Switch
PRW023 20A DP Switch With Neon
PRW040 20A DP 'Water Heater' Switch
PRW042 20A DP 'Water Heater' Switch With Neon

20A DP Sink/Bath Switch

PRW024 20A DP Sink/Bath Switch With Neon

Fan Isolation Switch

PRW020 10A 3 Pole Fan Isolation Switch
PRW021 10A 3 Pole Isolation Switch

Lockable Switch

PRW660 20A Double Pole Key Lockable Switch

Lockable Socket

PRW675 13A 1G DP Key Lockable Socket With Neon

Standards: BS EN 60669 **660, 675:** BS 1363-2, BS EN 60669-1
Back Box Depth: 25mm Minimum **660, 675:** 35mm Minimum **Cable Size: 20A DP:** 4 x 2.5mm² **10A 3P:** 1 x 2.5mm² / 2 x 1.5mm² **660, 675:** 3 x 2.5mm2, 2 x 4mm2
Dimensions: 1 Gang: (86mm x 86mm x 11mm)



PRW200




PRW201



PRW202



PRW204

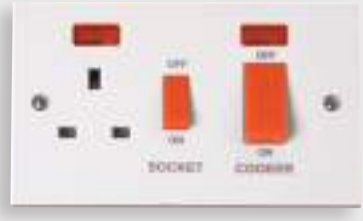

PRW205



PRW203

45A Switches And Socket Outlets

PRW200	45A 1 Gang DP Switch
PRW201	45A 1 Gang DP Switch With Neon
PRW202	45A 2 Gang DP Switch
PRW203	45A 2 Gang DP Switch With Neon
PRW204	45A 2 Gang DP Switch With 13A DP Switched Socket
PRW205	45A 2 Gang DP Switch With 13A DP Switched Socket & Neons

Standards: BS EN 60669, BS 4177
Back Box Depth: 35mm Minimum **Cable Size:** 45A: 1 x 16mm²
Dimensions: **1 Gang:** (86mm x 86mm x 11mm), **2 Gang:** (146mm x 86mm x 11mm)



PRW500



PRW501



PRW503



PRW505

45A Switches And Socket Outlets With White Rockers

PRW500	45A 1 Gang DP Switch With White Rocker
PRW501	45A 1 Gang DP Switch With White Rocker & Neon
PRW502	45A 2 Gang DP Switch With White Rocker
PRW503	45A 2 Gang DP Switch With White Rocker & Neon
PRW504	45A 2 Gang DP Switch With 13A DP Switched Socket & White Rockers
PRW505	45A 2 Gang DP Switch With 13A DP Switched Socket, White Rockers & Neons

Standards: BS EN 60669, BS 4177
Back Box Depth: 35mm Minimum **Cable Size:** 45A: 1 x 16mm²
Dimensions: **1 Gang:** (86mm x 86mm x 11mm), **2 Gang:** (146mm x 86mm x 11mm)


PRW208


PRW210/
PRW211


PRC009


PRC210


PRW213


PRC216

essentials™ Decorative covers available for PRC210, see Essentials™ page m28

Fan Isolation Pull Cord Switches

PRW208 10A 3 Pole Fan Isolation Pull Cord Switch

45A & 50A Pull Cord Switches

PRW210 45A DP Pull Cord Switch With Mechanical 'On/Off' & Neon
PRW211 50A DP Pull Cord Switch With Mechanical 'On/Off' & Neon
PRW213 50A DP Round Pull Cord Switch With Mechanical 'On/Off', Neon & Pattress

10AX & 16A Pull Cord Switches

PRC009 10AX 2 Way Ceiling Pull Cord Switch
PRC210 10AX 2 Way Pull Cord Switch
PRC216 16A DP Pull Cord Switch With Neon

Standards: BS EN 60669
Cable Size: 009, 208, 210: 3 x 2.5mm² / 1 x 6mm² **211:** 2 x 6mm² / 1 x 25mm² **213:** 2 x 6mm² / 1 x 25mm² **216:** 3 x 1.5mm² / 2 x 2.5mm²
Dimensions: PRC009: 75.5mm Dia. x 43.5mm **PRC210/216:** 70mm Dia. x 42mm **PRW208:** 86mm x 86mm x 43mm
PRW210/211: 86mm x 86mm x 43mm **PRW213:** 100mm Dia. x 77mm



PRW215



PRW217



PRW218

45A Cooker Connection Plates

PRW215 45A 1 Gang Cooker Connection Plate

45A Cooker Outlet Plates

PRW217 45A Easyfit Dual Appliance Outlet Plate

UK Design Registration No. 3015175

Pattress Box for PRW217 - Urea

PRW218 35mm Deep Pattress Box For Use With PRW217

Standards: 215/217: BS 5733
Back Box Depth: **215:** 35mm Minimum **217:** 25mm Minimum
Cable Size: **215:** 2 x 10mm² **217:** 1 x 10mm² **Dimensions:** **215:** 84mm x 84mm x 23mm **217:** 84mm x 130mm x 27mm




PRW100



PRW090



PRW017

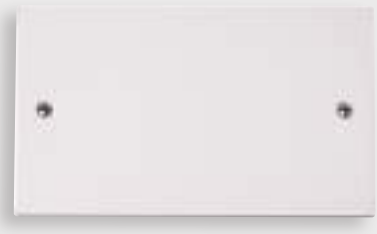

PRW061

Flex Outlet Plates

PRW017 20A Flex Outlet Plate

Blank Plates

PRW060 1 Gang Blank Plate
PRW061 2 Gang Blank Plate

Connector Box

PRW090 15A 10 Way Surface Connector Box

(for use with central heating installations)

Dual Voltage Shaver Socket

PRW100 115/230V Dual Voltage Shaver Socket

Click® dual voltage shaver outlets incorporate a double wound isolating transformer rated 20Va at 230V or 115V and meets BS EN 61558-2-5: 2010 making it safe for use in bathrooms. Shaver outlet is not continuously rated and therefore not suitable for use as a permanent charging outlet.

Standards: 100: BS EN 61558 **017:** BS 5733
Back Box Depth: 017: 16mm min. **100:** 47mm min. **Cable Size: 100:** 2 x 1.5mm² / 1 x 2.5mm². **017:** 1 x 6mm² / 4 x 2.5mm²
Dimensions: 1 Gang: (86mm x 86mm x 11mm), **2 Gang:** (146mm x 86mm x 11mm)

TV, Telephone & Data Sockets

Providing the means to facilitate the connection of modern communications equipment is as important today as it is to provide the electrical power to operate them.

This section of the catalogue is devoted to the New Media™ range of plate accessories which includes products for connecting telephone, computer, television and satellite devices.




RJ11 Outlet | UK Telephone Outlets | Satellite Socket Outlets | Coaxial Sockets



PRW115



PRW119/120/124/125



PRW121/122/126/127

Twin outlets are 2 separate sockets and not internally linked together.

RJ11 Telephone Outlet - PC

PRW115 Single RJ11 (Irish/US) Outlet


Telephone Outlets - Urea

PRW119 Single Telephone Outlet - Master
PRW122 Twin Telephone Outlet - Master
PRW124 Single Telephone Outlet - Secondary
PRW127 Twin Telephone Outlet - Secondary


Telephone Outlets - PC

PRW120 Single Telephone Outlet - Master
PRW121 Twin Telephone Outlet - Master
PRW125 Single Telephone Outlet - Secondary
PRW126 Twin Telephone Outlet - Secondary

Back Box Depth: 16mm Minimum **RJ11:** 35mm Minimum **Termination Type:** IDC
Dimensions: Urea: (86mm x 86mm x 11mm), **PC:** (85mm x 85mm x 8mm)



PRW065



PRW066



PRW156



PRW170



PRW157



PRW158



PRW159

Isolated outlets will filter out any interference, if a 2 way signal is required,
i.e. for use with satellite hard wire extensions, then a non-isolated outlet is required.

Non-Isolated Coaxial Outlets (Unshielded)

PRW065 Single Coaxial Outlet
PRW066 Twin Coaxial Outlet

Satellite Outlets (Unshielded)

PRW156 Non-Isolated Single Satellite Outlet
PRW170 Non-Isolated Satellite & Non-Isolated Coaxial Outlet
PRW157 Isolated Satellite & Isolated Coaxial Outlet


Isolated Coaxial Outlets (Unshielded)

PRW158 Single Isolated Coaxial Outlet
PRW159 Twin Isolated Coaxial Outlet

Back Box Depth: 16mm Minimum
Dimensions: 1 Gang: (86mm x 86mm x 11mm), **2 Gang:** (146mm x 86mm x 11mm)




PRW310

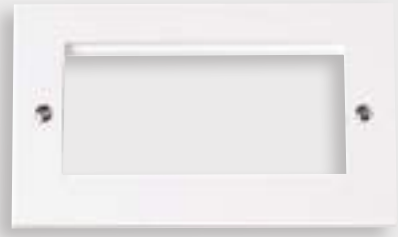

PRW312



PRW311



MM410BK MM405WH MM501BK MM440BK

new media™

For a complete range of New Media™ modules please see our dedicated New Media™ section.

Unfurnished Plates - New Media™

PRW310	1 Gang New Media™ Unfurnished Plate - 1 Aperture
PRW311	1 Gang New Media™ Unfurnished Plate - 2 Apertures
PRW312	2 Gang New Media™ Unfurnished Plate - 4 Apertures

Selecting from a range of module inserts covering all manner of media transfer, the installer will now be able to configure their own arrangement of TV, radio or satellite reception, plus speaker, telephone and data outlets. All modules can be inserted into single or double wall plates, fitted onto standard switch and socket boxes.

Back Box Depth: Dependant on module used
Dimensions: **1 Gang:** (86mm x 86mm x 11mm), **2 Gang:** (146mm x 86mm x 11mm)


PRW080


PRW081


PRW082


PRW084


PRW089


PRW091


PRW175


PRW176

essentials™

For the complete range of back boxes see Essentials™ page m7.

Pattress Boxes - PVC

PRW230 1 Gang 29mm Deep PVC Pattress Box - Trunking
PRW240 1 Gang 29mm Deep PVC Pattress Box - Conduit
PRW235 2 Gang 29mm Deep PVC Pattress Box - Trunking
PRW245 2 Gang 29mm Deep PVC Pattress Box - Conduit

Architrave Pattress Boxes

PRW175 1 Gang 19mm Deep Architrave Pattress Box with Earth Terminal
PRW176 2 Gang 19mm Deep Architrave Pattress Box with Earth Terminal
For Polar™ products only

Converter Pattress Box

PRW091 1 Gang To 2 Gang 16mm Deep Converter Pattress

Moulded Pattress Boxes

PRW080 1 Gang 16mm Deep Pattress Box With Earth Terminal
PRW081 1 Gang 25mm Deep Pattress Box
PRW083 1 Gang 35mm Deep Pattress Box
PRW084 2 Gang 35mm Deep Pattress Box
PRW085 1 Gang 47mm Deep Pattress Box With Earth Terminal
PRW086 2 Gang 47mm Deep Pattress Box Fitted With Cable Restraint & Earth Terminal
PRW082 2 Gang 25mm Deep Pattress Box
PRW089 Dual Accessory 29mm Deep Pattress Box With Earth Terminal


WA095


WA102


WA106P


WA107P


GA100


WA4247

MINIGRID® For the complete range of FlameGuard® back boxes see Essentials™ page m8.
For the complete range of back boxes see Essentials™ page m4.

Galvanised Steel Back Boxes

WA092 1 Gang 16mm Deep Galvanised Steel K.O. Box
WA093 1 Gang 25mm Deep Galvanised Steel K.O. Box
WA094 2 Gang 25mm Deep Galvanised Steel K.O. Box
WA095 1 Gang 35mm Deep Galvanised Steel K.O. Box
WA096 2 Gang 35mm Deep Galvanised Steel K.O. Box
WA097 1 Gang 47mm Deep Galvanised Steel K.O. Box
WA098 2 Gang 47mm Deep Galvanised Steel K.O. Box
WA099 1 + 1 35mm Deep Dual Accessory Box
WA102 1 + 2 35mm Deep Dual Accessory Box
WA671 1 Gang 25mm Deep Architrave Box With 60.3mm Hole Centres
WA672 2 Gang 25mm Deep Architrave Box With 120.6mm Hole Centres

'Ezylink' Dry Lining Box Connector

GA100 'Ezylink' Dry Lining Box Connector

Dry Lining Boxes

WA087P 1 Gang 35mm Deep Dry Lining Box
WA088P 2 Gang 35mm Deep Dry Lining Box
WA106P 1 Gang 47mm Deep Dry Lining Box
WA107P 2 Gang 47mm Deep Dry Lining Box
WA108P Round Ceiling 34mm Deep Dry Lining Box

FlameGuard® Dry Lining Boxes

WA4135 1 Gang 35mm Deep FlameGuard® Dry Lining Box
WA4235 2 Gang 35mm Deep FlameGuard® Dry Lining Box
WA4147 1 Gang 47mm Deep FlameGuard® Dry Lining Box
WA4247 2 Gang 47mm Deep FlameGuard® Dry Lining Box

Part M Range™

Visually Contrasting Wiring Accessories





Part M Range™

Visually Contrasting Wiring Accessories

Contents

Design Considerations	**h4**
Switches	**h7**
Back Boxes	**h10**
Power Socket Outlets	**h12**
Control Switches	**h15**
Ceiling Accessories	**h16**
New Media™	**h17**
Design Provisions	**h18**
Light Reflectance Values	**h19**
Dry Lining Boxes	**h20**

Mode® wiring accessory range has been well received since its launch in 2006, with additional socket outlets, fused connection units and more recently 45A switches with white rockers being some of the latest additions to the range.

The Mode® range has recently been expanded to include a range of anthracite grey finished accessories to comply with current Building Regulations Part M.

The modular design is a standard feature of the Mode® range allowing designers and installers unprecedented flexibility in creating dedicated wiring solutions to deal specifically with virtually all wiring requirements.

All Mode® wiring accessories are tested and compliant with all UK and European standards.

All Mode® wiring accessories are covered by a comprehensive 'No Quibble' 20 year guarantee against any fault in materials or manufacture.



Antimicrobial Certified Products

All white moulded and Mode® Part M™ wiring accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products independently tested achieved a 99.99% kill off rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella and Klebsiella Pneumoniae.

Building Regulations Part M

Part M1 of the Building Regulations refers to the 'Access and Use' of a building and its facilities with Sections 4.25 to 4.30 then refining the use and design considerations of switches, outlets and controls.

Part of the requirements of Part M1 is to aid disabled people within their surroundings, being able to activate a light, socket or control within arms length, for the visually impaired being able to identify the units' position against its surrounding décor, and for the infirm a suitable pull-cord switch to raise the alarm in the event of an emergency.

The Part M™ Range brochure offers suitable solutions to the elements raised in Part M1 (4.25 to 4.30) with anthracite grey accessories contrasting against the high reflective décor used in the majority of todays' buildings along with a range of pull-cord switches with alternative cords and bangles.

As well as the Mode® anthracite grey finish accessories, the wide range of Click® moulded, decorative and metal clad accessories offer alternatives to either suit or contrast against the surrounding décor.



Design Considerations

The key factors that affect the use of switches, outlets and controls are ease of operation, visibility, height and freedom from obstruction.


- A consistent relationship with doorways and corners will further reinforce the ease with which people manipulate switches and controls
- All users should be able to locate a control, know which setting it is on and use it without setting it on and use it without inadvertently changing its setting
- Controls that contrast visually with their surroundings are more convenient for visually impaired people, as are light switches that are activated by a large push pad
- It is also an advantage if individual switches on panels and on multiple socket outlets are well separated, or in the form of large touch plates, to avoid the inadvertent selection of an adjacent control by visually impaired people and people with limited dexterity





Pull Cord Provisions

- Where wall mounted switches cannot be provided, i.e. bathrooms and toilets, lighting pull cords are recommended. A 50mm bangle visually contrasting with its background needs to be fitted between 900mm and 1100mm above the floor.
- For emergency alarms systems the pull cord and bangle needs to be coloured red and located as close to a wall as possible. Two bangles are to be fitted, one set at 100mm and the other set between 800mm and 1000mm above the floor.

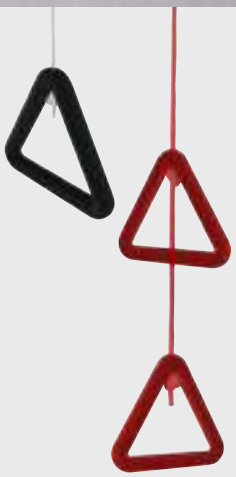





Switches

10AX Plate Switches (Modular)

All 10AX plate switches feature individual switch modules all fully interchangeable between plastic and metal ranges - thus providing optimum flexibility in wiring.

MINIGRID®





The products illustrated in this section of the catalogue are finished plates and unfurnished mounting plates.

For comprehensive information on the full range of modules available please refer to our Minigrid™ product brochure.



CMA011AG



CMA012AG



CMA013AG



CMA811AG



CMA812AG



CMA813AG

MINIGRID® For the complete range of Minigrid™ modules, see the dedicated Minigrid™ section, page j18.

Plates Switches - MiniGrid™

CMA011AG	10AX 1 Gang 2 Way Plate Switch
CMA012AG	10AX 2 Gang 2 Way Plate Switch
CMA013AG	10AX 3 Gang 2 Way Plate Switch

Polar™ white switch modules fitted, interchangeable with Minigrid™ modules

Wide Rocker Switches - Non Modular

CMA811AG	10AX 1 Gang 2 Way Wide Rocker Switch
CMA812AG	10AX 2 Gang 2 Way Wide Rocker Switch
CMA813AG	10AX 3 Gang 2 Way Wide Rocker Switch

Standards: BS EN 60669
Back Box Depth: 16mm Minimum **Cable Size:** 4 x 1.5mm² / 2 x 2.5mm² / 1 x 6mm² Maximum
Dimensions: **1 Gang:** (86mm x 86mm x 9.5mm)



CMA401AG



CMA402AG



CMA403AG



CMA404AG



CMA426AG


MINIGRID® For the complete range of Minigrid™ modules, see the dedicated Minigrid™ section, page j18.

Unfurnished Plates - MiniGrid™

CMA401AG	1 Gang MiniGrid™ Unfurnished Plate - 1 Aperture
CMA402AG	1 Gang MiniGrid™ Unfurnished Plate - 2 Apertures
CMA403AG	1 Gang MiniGrid™ Unfurnished Plate - 3 Apertures
CMA404AG	2 Gang MiniGrid™ Unfurnished Plate - 2 x 2 Apertures
CMA426AG	2 Gang MiniGrid™ Unfurnished Plate - 6 In-Line Apertures

Switch modules interchangeable with Minigrid™ modules

Back Box Depth: Dependant on module used
Dimensions: **1 Gang:** (86mm x 86mm x 9.5mm), **2 Gang:** (146mm x 86mm x 9.5mm)

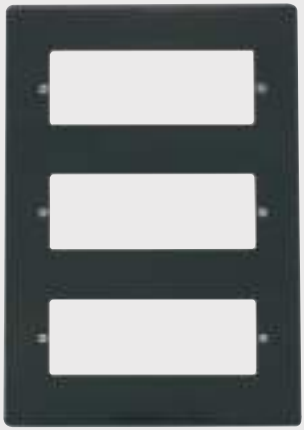

VPAG518



VPAG512



MINIGRID®

The furnished plate shown here contains a selection of both single and twin width Minigrid™ modules. The yoke 'GR100' is required to mount the Minigrid™ modules into prior to assembling the frontplate.

MINIGRID®

The 6 aperture yoke GR100PW utilises Polar™ white Minigrid™ modules.
Switch modules are interchangeable with Minigrid™ modules, see page j18.
For the complete range of Minigrid™ modules, see the dedicated Minigrid™ section.

2 Tier Unfurnished Plates - MiniGrid™

VPAG512 2 Tier MiniGrid™ Unfurnished Plate c/w Gaskets - 12 Apertures - Part M™

3 Tier Unfurnished Plates c/w Gaskets - MiniGrid™

VPAG518 3 Tier MiniGrid™ Unfurnished Plate c/w Gaskets - 18 Apertures - Part M™

Back Box Depth: 47mm Minimum
Dimensions: **12 Module:** (146mm x 146mm x 8mm) **18 Module:** (146mm x 227mm x 8mm)



Example of yoke furnished with modules



GR100





WA512



WA518

MINIGRID® Galvanised steel back boxes supplied for flush mounting of the large Minigrid™ plates. Mounting yoke facilitates pre-assembly of required modules. Fitted with twin earth terminals.

Yokes

GR100BK	MiniGrid™ Module Yoke - 6 Apertures - Black
GR100PW	MiniGrid™ Module Yoke - 6 Apertures - White

Yokes & recommended ranges: Polar™ white - Part M Range™

Galvanised Steel Back Boxes

WA512	2 Tier 47mm Deep K.O. Box
WA518	3 Tier 47mm Deep K.O. Box

Dimensions: WA512: 137mm x 137mm **WA518:** 137mm x 197mm

Power Socket Outlets, Fused Connection Units & Control Switches

All Part M™ 13A sockets and fused connection units are tested and approved to BS1363 offering assured quality and safety.

The provision of large twin earth terminals on our Two Gang sockets and fused connection units greatly facilitates wiring and installation

The Part M™ range offers a solution for almost every possible design need and will enhance the décor of any area whether in a kitchen, bedroom, lounge or study etc...



13A Wall Socket Outlets | Fused Connection Units | DP Switches



CMA035AG / CMA1035AG



CMA836AG / CMA1836AG



CMA835AG / CMA1835AG



CMA840AG / CMA1840AG

Switched Socket Outlets

CMA035AG	13A 1 Gang DP Switched Socket
CMA835AG	13A 1 Gang DP Switched Socket With Neon
CMA836AG	13A 2 Gang DP Switched Socket With Outboard Rockers (Twin Earth)
CMA840AG	13A 2 Gang DP Switched Socket With Neons & Outboard Rockers (Twin Earth)

Safety Shutter Socket Outlets

CMA1035AG	13A 1 Gang DP 3 Pin Safety Shutter Switched Socket
CMA1835AG	13A 1 Gang DP 3 Pin Safety Shutter Switched Socket & Neon
CMA1836AG	13A 2 Gang DP 3 Pin Safety Shutter Switched Socket With Outboard Rockers (Twin Earth)
CMA1840AG	13A 2 Gang DP 3 Pin Safety Shutter Switched Socket With Outboard Rockers & Neons (Twin Earth)

Standards: BS 1363
Back Box Depth: 25mm Minimum **Cable Size:** 4 x 2.5mm² / 2 x 4mm²
Dimensions: **1 Gang:** (86mm x 86mm x 9.5mm), **2 Gang:** (146mm x 86mm x 9.5mm)



CMA735AG
Locating socket



CMA736AG
Locating socket

Locating Plug Sockets

CMA735AG 13A 1 Gang DP Switched Locating Plug Socket
CMA736AG 13A 2 Gang DP Switched Locating Plug Socket With Outboard Rockers (Twin Earth)

Standards: BS 1363
Back Box Depth: 25mm Minimum **Cable Size:** 4 x 2.5mm^2 / 2 x 4mm^2
Dimensions: **1 Gang:** (86mm x 86mm x 9.5mm), **2 Gang:** (146mm x 86mm x 9.5mm)



CMA771UAG



CMA770AG



CMA780AG

Switched Sockets With USB Outlets

CMA771UAG 13A 1 Gang Switched Socket With 2.1A USB Outlet (Twin Earth)

CMA770AG 13A 2 Gang Switched Socket With 2.1A USB Outlet (Twin Earth)
CMA780AG 13A 2 Gang Switched Socket With Twin 2.1A USB Outlets (4.2A) (Twin Earth)

Standards: BS1363-2: 2016 +A1: 2018, BS EN 62368-1 and BS EN 62680-1-1
Back Box Depth: 25m **Cable Size:** 4 x 2.5mm² / 2 x 4mm²
Dimensions: **1 Gang:** (86mm x 86mm x 9.5mm), **2 Gang:** (146mm x 86mm x 9.5mm)



CMA023AG



CMA651AG



CMA652AG



CMA052AG



CMA500AG



CMA501AG

20A Control Switches With Optional Flex Outlet Through The Bottom

CMA023AG 20A DP Switch With Neon
3 pole and 20A DP switches are non-modular

Fused Connection Units With Optional Flex Outlet Through The Bottom

CMA052AG 13A Switched Fused Connection Unit With Neon

Fused Connection Units Without Flex Outlet

CMA651AG 13A Switched Fused Connection Unit
CMA652AG 13A Switched Fused Connection Unit With Neon

45A Switches And Socket Outlets

CMA500AG 45A 1 Gang DP Switch
CMA501AG 45A 1 Gang DP Switch With Neon

Standards: 023, 500, 501: BS EN 60669. **651, 652, 052:** BS1363-4
Back Box Depth: 20A: 25mm min. **45A:** 35mm min. **Cable Size: 13A:** 3 x 2.5mm² or 2 x 4mm² **45A:** 1 x 16mm² **20A:** 4 x 2.5mm²
Dimensions: 1 Gang: (86mm x 86mm x 9.5mm)



PRC210AG



PRW210RD/PRW211RD



PRC216AG



PRW208AG



PRW213AG

Security Screws

SP625 Standard M3.5 Security Screw 25mm Long (Bag 100)

Require 2mm security allen key/driver.



SP625


Pull Cord Switches

PRC210AG	10AX 2 Way Pull Cord Switch With Grey Bangle
PRC216AG	16A DP Pull Cord Switch With Grey Bangle
PRW208AG	10A 3 Pole Fan Isolation Pull Cord Switch With Grey Bangle
PRW210AG	45A DP Pull Cord Switch With Mechanical 'On/Off' & Neon - Grey Bangle
PRW210RD	45A DP Pull Cord Switch With Mechanical 'On/Off' & Neon - Red Bangle
PRW211AG	50A DP Pull Cord Switch With Mechanical 'On/Off' & Neon - Grey Bangle
PRW211RD	50A DP Pull Cord Switch With Mechanical 'On/Off' & Neon - Red Bangle
PRW213AG	50A DP Round Pull Cord Switch With Mechanical 'On/Off', Neon, Pattress & Grey Bangle
PRW213RD	50A DP Round Pull Cord Switch With Mechanical 'On/Off', Neon, Pattress & Red Bangle

Standards: BS EN 60669
Cable Size: **208, 216, PRC210:** 2 x 1.5mm² / 1 x 2.5mm² **PRW210:** 1 x 16mm² **211:** 2 x 6mm² / 1 x 25mm² **213:** 2 x 6mm² / 1 x 25mm²
Dimensions: **PRC210/216:** 70mm Dia. x 42mm **PRW208:** 86mm x 86mm x 43mm
PRW210/211: 86mm x 86mm x 43mm **PRW213:** 100mm Dia. x 77mm



CMA310AG

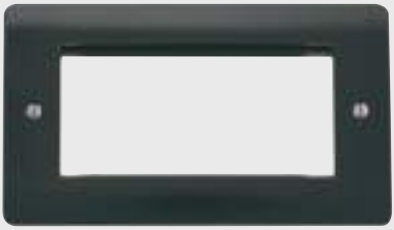

CMA312AG



MM410WH



MM515



MM501WH



MM440WH



CMA311AG

new media™

For a complete range of New Media™ modules please see our dedicated New Media™ section.


Unfurnished Plates - New Media™

CMA310AG	1 Gang New Media™ Unfurnished Plate - 1 Aperture
CMA311AG	1 Gang New Media™ Unfurnished Plate - 2 Apertures
CMA312AG	2 Gang New Media™ Unfurnished Plate - 4 Apertures

Selecting from a range of module inserts covering all manner of media transfer, the installer will now be able to configure their own arrangement of TV, radio or satellite reception, plus speaker, telephone and data outlets. All modules can be inserted into single or double wall plates, fitted onto standard switch and socket boxes.

All New Media™ plates are suitable for use with standard euro module inserts.

Back Box Depth: Dependant on module used
Dimensions: **1 Gang:** (86mm x 86mm x 9.5mm), **2 Gang:** (146mm x 86mm x 9.5mm)

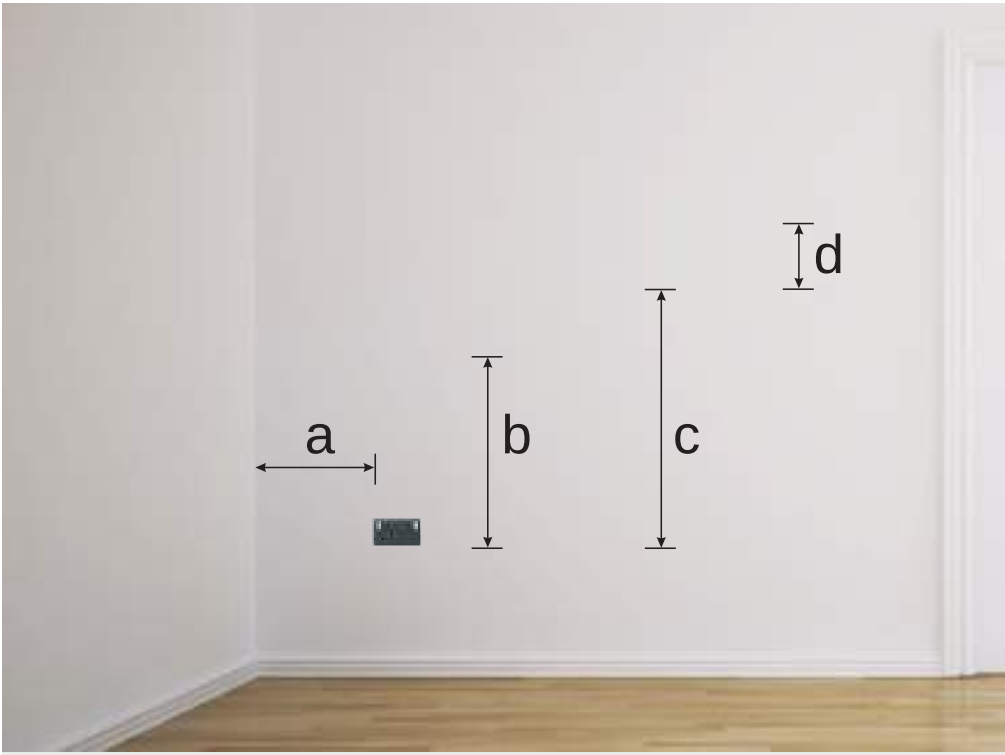

Provision For Meeting The Design Considerations

Section 4.30 of Part M™ lays out the provisions for satisfying the design considerations.

a. Socket outlets are located consistently to doorways and room corners, but in any case no nearer than 350mm from room corners.

b. Wall mounted sockets outlets, telephone, data and TV outlets are located between 400mm and 1000mm above the floor, with a preference for the lower end of the range.

c. Switches for permanently wired appliances are located between 400mm and 1200mm above the floor, unless needed at a higher level for particular appliances.

d. Controls that need close vision are located between 1200mm and 1400mm above the floor, so that readings may be taken by a person sitting or standing.

e. All switches that require precise hand movements are located between 750mm and 1200mm above the floor.

f. Light switches for use by the general public have large push pads and align with door handles within the range 900mm to 1100mm, for ease of location when entering a room.

g. Simple push button controls that require limited dexterity are not more than 1200mm above the floor.



Range	LRV	
CMA***AG	8.9	Anthracite Grey Range
CMA***	74.3	Mode® Range
PRW***	74.3	Polar™ Range
CCA***	74.3	Curva® Range
WA***	83.6	Accessories White Range
CL***	37	Metal Clad Range
WA***RD	15.3	Red Range
BA***	59.6	Beige Range

GridPro®, Minigrid™ & New Media™ Modules

Finish	LRV	
PW	74.3	Polar™ White
WH	83.6	Accessories White
BK	4.9	Black
RD	15.3	Red

Decorative Finishes

Finish	LRV	
AB*	34.1	Antique Brass
BN*	18.4	Black Nickel
PN*	43.3	Pearl Nickel
SB*	66.9	Satin Brass
SC*	38.3	Satin Chrome
SS*	49.8	Stainless Steel

LRV values for finishes with * should be used with caution as the gloss level on these can give inaccurate results depending on lighting and or viewing conditions.

Part M™ Section 0.26 indicates that the visual perception of one element of the building, or fitting within the building against another has a greater light reflectance value difference of 30 points, where black = 0 points and white = 100 points. Where illuminance on surfaces is greater than 200 LUX a difference in light reflectance value should be a minimum of 20 points.

Example: Anthracite grey (LRV 8.9) on a brilliant white background (LRV 100) gives a contrast of 91.1 points which complies with Part M™.

Section 4.30 '(m) frontplates contrast visually with their backgrounds'. This requirement is open to interpretation, with one being the complete product contrasting against its background and another with the switch contrasting against its frontplate. The Part M™ range of products satisfies both.

The contrast values are stipulated within - Design guidance for internal built environments - Reading University.

The information relayed in this brochure is for guidance only, with the specifier or contractor having the responsibility of selecting the products which comply with Part M™ and ensuring they are installed and positioned to meet the regulations.



WA095



WA102



WA106P



WA107P



GA100



WA4247

essentials™ For the complete range of back boxes see Essentials™ page m4.
For the complete range of FlameGuard® back boxes see Essentials™ page m8.

Galvanised Steel Back Boxes

WA092 1 Gang 16mm Deep Galvanised Steel K.O. Box
WA093 1 Gang 25mm Deep Galvanised Steel K.O. Box
WA094 2 Gang 25mm Deep Galvanised Steel K.O. Box
WA095 1 Gang 35mm Deep Galvanised Steel K.O. Box
WA096 2 Gang 35mm Deep Galvanised Steel K.O. Box
WA097 1 Gang 47mm Deep Galvanised Steel K.O. Box
WA098 2 Gang 47mm Deep Galvanised Steel K.O. Box
WA099 1 + 1 35mm Deep Dual Accessory Box
WA102 1 + 2 35mm Deep Dual Accessory Box

'Ezylink' Dry Lining Box Connector

GA100 'Ezylink' Dry Lining Box Connector

Dry Lining Boxes

WA087P 1 Gang 35mm Deep Dry Lining Box
WA088P 2 Gang 35mm Deep Dry Lining Box
WA106P 1 Gang 47mm Deep Dry Lining Box
WA107P 2 Gang 47mm Deep Dry Lining Box
WA108P Round Ceiling 34mm Deep Dry Lining Box

FlameGuard® Dry Lining Boxes

WA4135 1 Gang 35mm Deep FlameGuard® Dry Lining Box
WA4235 2 Gang 35mm Deep FlameGuard® Dry Lining Box
WA4147 1 Gang 47mm Deep FlameGuard® Dry Lining Box
WA4247 2 Gang 47mm Deep FlameGuard® Dry Lining Box

GRIDPRO

Interchangeable Plates & Modules







GRIDPRO®

Interchangeable Plates & Modules

Contents

New Features	**i5**
Clip Feature Assembly Guide	**i20**
Screw Feature Assembly Guide	**i22**
Modules	**i26**
Dimmer Mounting Kits	**i78**
Deco Plus® Frontplates	**i85**
Definity™ Assembly Guide	**i94**
Definity™ Frontplates	**i96**
Define® and Metal Clad Assembly Guide	**i102**
Define® Frontplates	**i104**
Deco® Frontplates	**i112**
Mode® Frontplates	**i120**
Polar™ Frontplates	**i126**
Metal Clad Frontplates	**i132**
Yokes and Back Boxes	**i137**

Now introducing the new range of GridPro® frontplates and modules. A comprehensive range of finishes and modules available to offer ultimate flexibility.

As well as a wide range of modules to choose from all of our switch modules are 20A rated so they are ideal for both domestic and commercial applications.

The GridPro® range will complement your existing Click® installation, as the range was specifically designed to seamlessly match our existing ranges of Click® wiring accessories.





GRIDPRO®

One Module Fits All


...via a clipping feature & screw attachment on each module.

Clipping feature
Allows easy removal and assembly of the module onto a grid Yoke by hand or small tool.

Screw attachment feature
Allows the modules to be assembled onto 1 - 4 gang GridPro® frontplates without a yoke.



Ergonomic front mounting module
Designed with a large radius on the corners, allowing easy assembly.

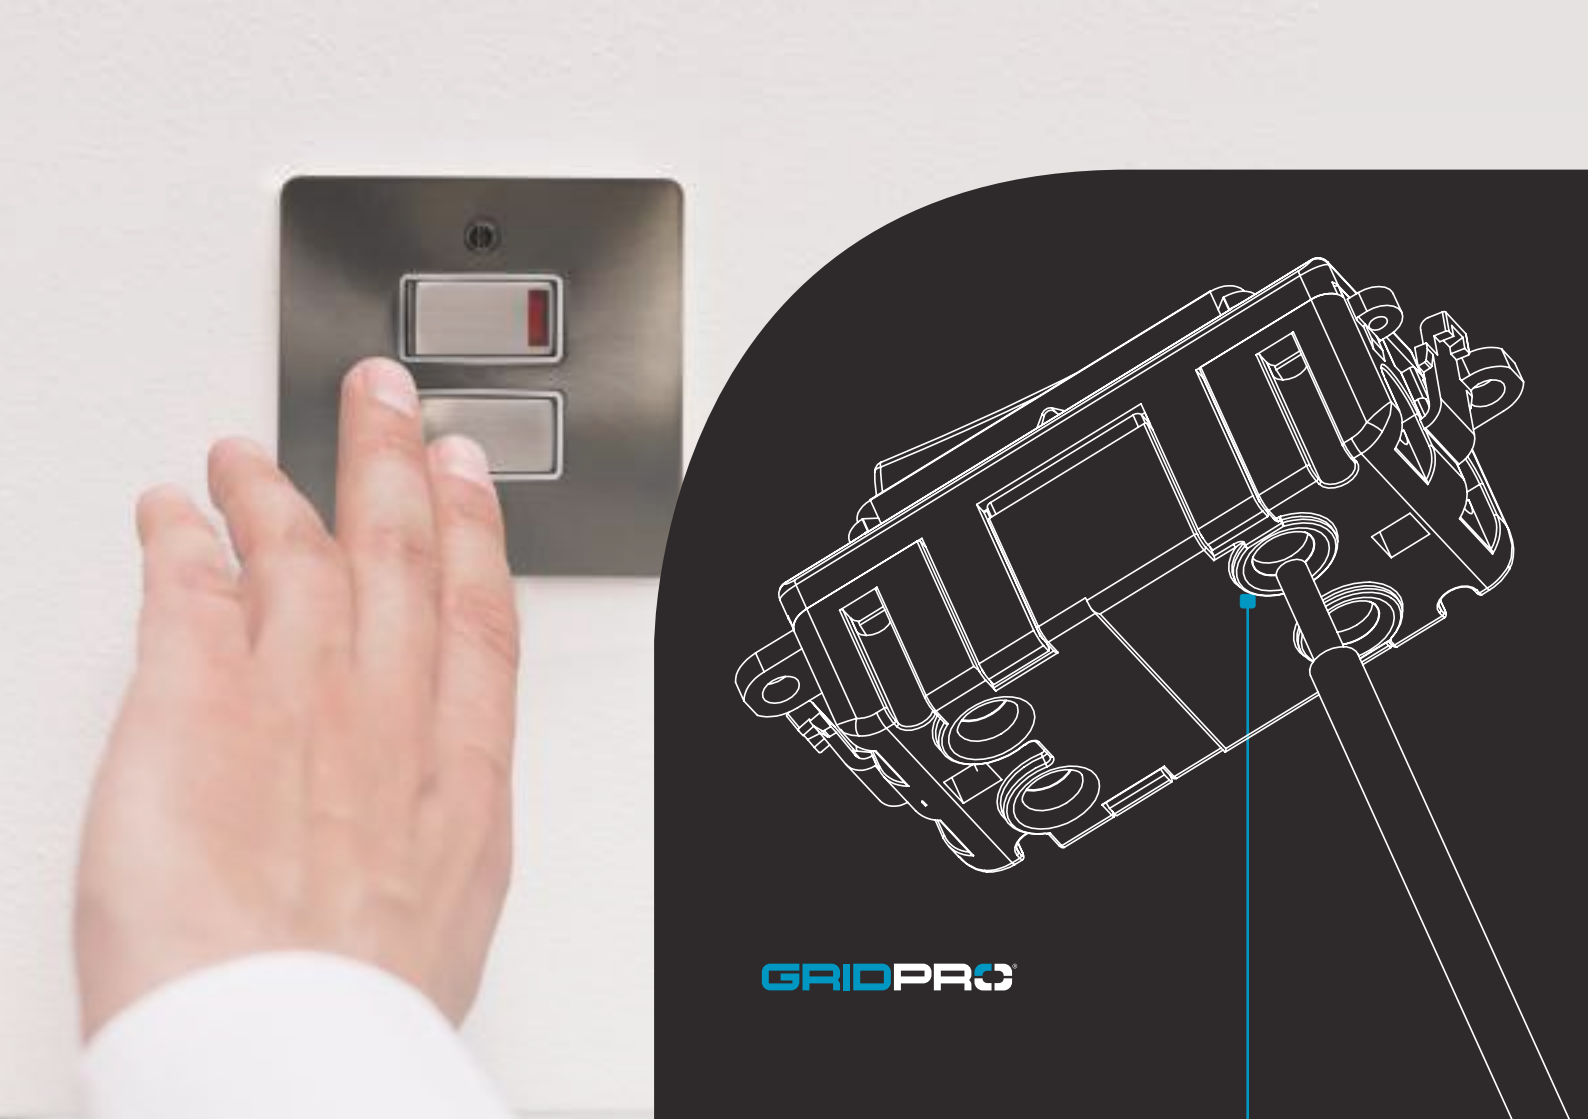

GRIDPRO

Ergonomic Modules


...every pro needs.

Large filleted terminal cable entry holes accepts 2 x 4mm² cable.

All modules come with backed off captivated terminal screws for ease of assembly.

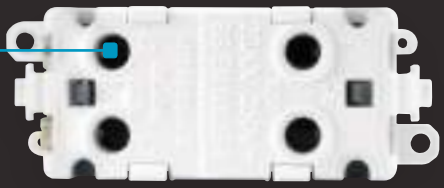

A screwdriver guide ensures the screwdriver easily locates with terminal screw head to clamp cable in position. The terminal screw apertures are designed to help guide the tool.



Our new range features design elements that enable quicker and easier installation whilst maintaining all the key features and stylish design of the existing range of Click® wiring accessories.

When a yoke is required for the larger GridPro® frontplates another unique feature of our modules is the clip on the top and bottom of the module, which allows easy removal and assembly of the module onto a grid Yoke by hand or a small tool.

Our GridPro® modules do not require a special back box so can be used with standard BS4662 Back Boxes.

GRIDPRO®


SCREW-IN MODULES

NO YOKE

STANDARD BACK BOX



For use with 1 - 4 gang GridPro® frontplates*...




*excluding the screwless Definity™ GridPro® frontplates, which have their own dedicated inserts.

No Yoke!

...for 1-4 gang GridPro® frontplates.

The GridPro® modules are secured to the back of the 1-4 gang GridPro® frontplates via the screw feature on the modules*. The benefit of not using a yoke is that it allows the installer to use standard back boxes!

*excluding the screwless Definity™ GridPro® frontplates, which have their own dedicated inserts.

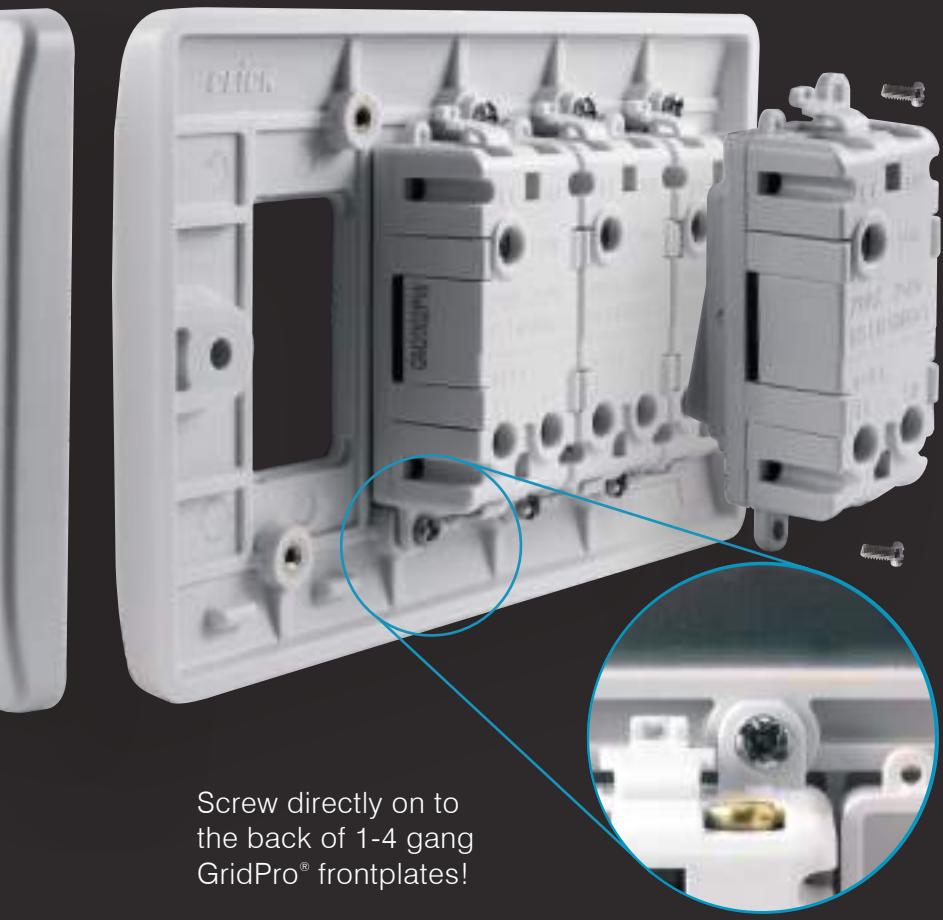


Screw directly on to the back of 1-4 gang GridPro® frontplates!

Clip-On Modules

...for fast and easy installation.


When a yoke is required on the multi tier GridPro® frontplates the module can be assembled using the clip attachment, which secures them to the metal yokes.

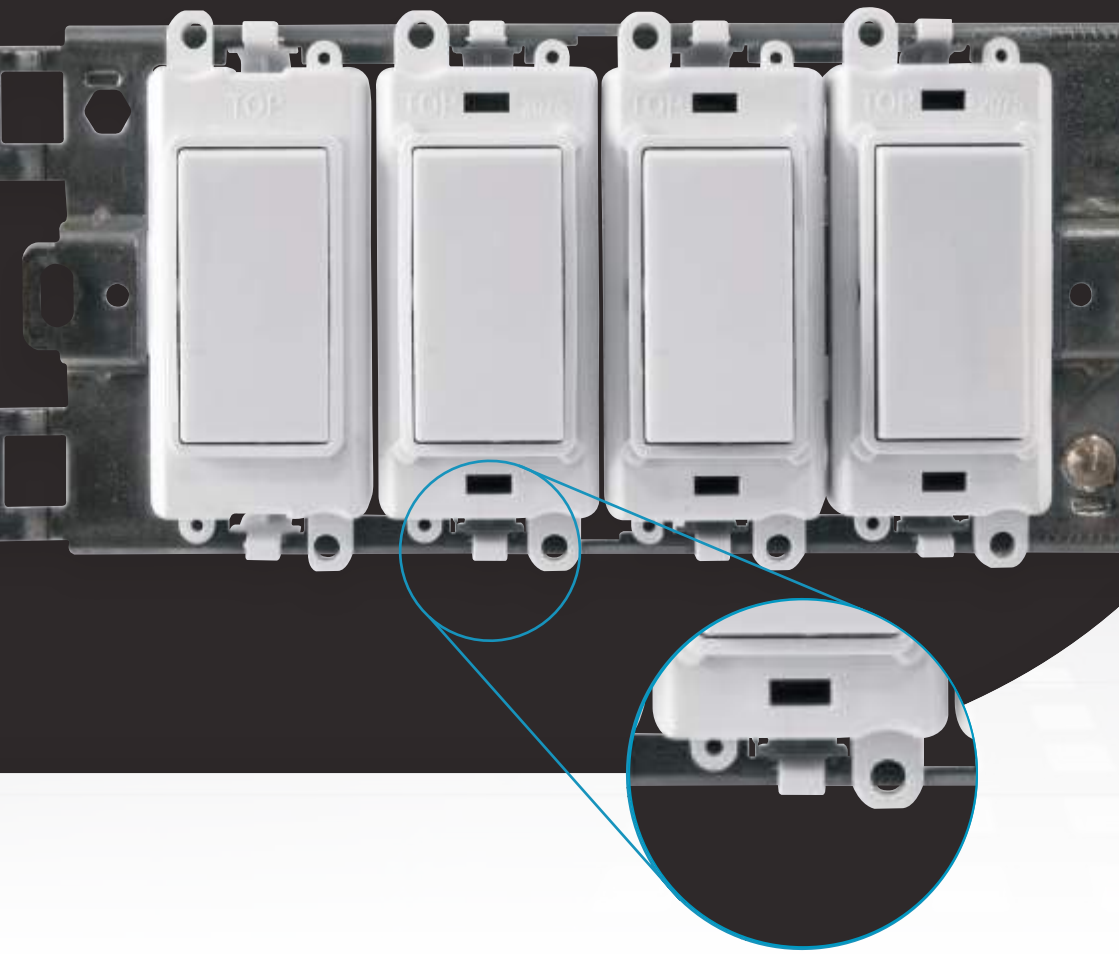


GRIDPRO®

CLIP-ON
MODULES



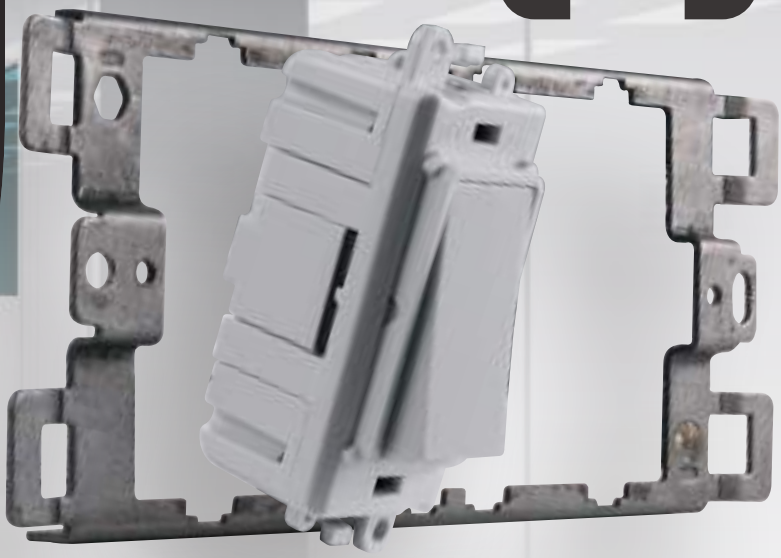

For use with 6 - 24 gang GridPro® frontplates*...

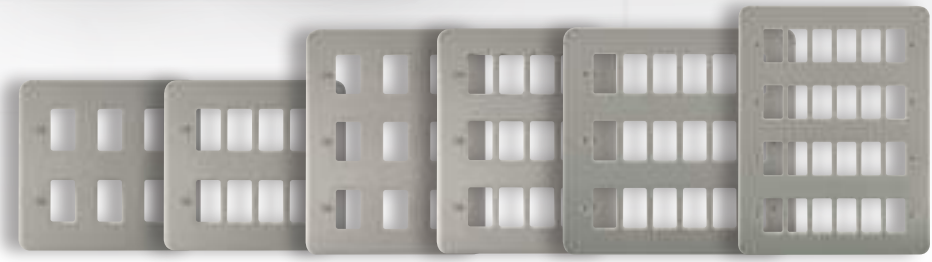

*excluding the screwless Definity™ GridPro® frontplates, which have their own dedicated inserts.



SCREW-IN MODULES

NO YOKE

Horizontal Fixing Screws

...on all GridPro® frontplates.


GridPro® frontplates have horizontal mounted screws to give a uniform, aesthetic look throughout the range.





No Yoke needed on 1 - 4 gang GridPro® frontplates!

Screw modules directly onto the back of 1-4 gang GridPro® frontplates*.

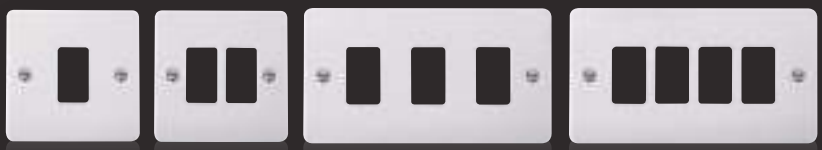

*excluding the screwless Definity™ GridPro® frontplates, which have their own dedicated inserts.



Antimicrobial Certified Products

The antimicrobial symbol is shown on all pages where products are protected by this feature.

All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases.



MODE® polar™



All products were independently tested and achieved a 99.9% kill rate across all four types of the strains of bacteria
- MRSA, E-Coli, Salmonella, and Klebsiella Pneumoniae.


GRIDPRO

Standard BS4662 Back Boxes

...are all you need.

A unique feature of 1 - 4 gang GridPro® frontplates is that any British Standard BS4662 flush mounted back boxes can be used. This is because our 1 - 4 gang GridPro® frontplates do not require a yoke!*



*excluding the screwless Definity™ GridPro® frontplates, which have their own dedicated inserts.




STANDARD BACK BOX

WITH TABS
FITTING ON
BACK BOX SURFACE



SNAP TABS
FITTING INSIDE BACK BOX

GRIDPRO®

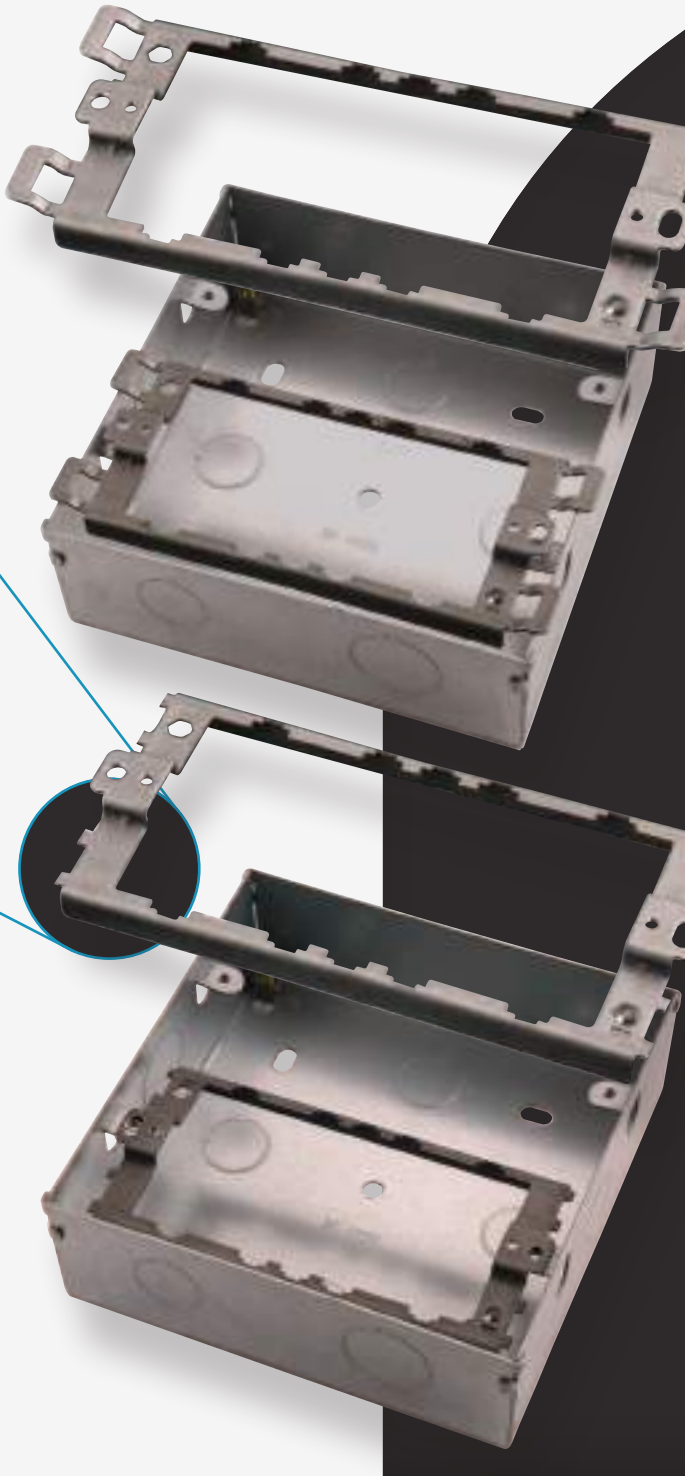


Universal Yokes

snap off tabs.

Removal of the end tabs allows the GridPro® yoke to be universal, therefore it may be used for any Click® plate styles* including Define® and Metal Clad variants.


*excluding the Definity™ GridPro® frontplates, which have their own dedicated inserts.

Remove tabs with a simple snap to allow the yoke to fit within the back box.

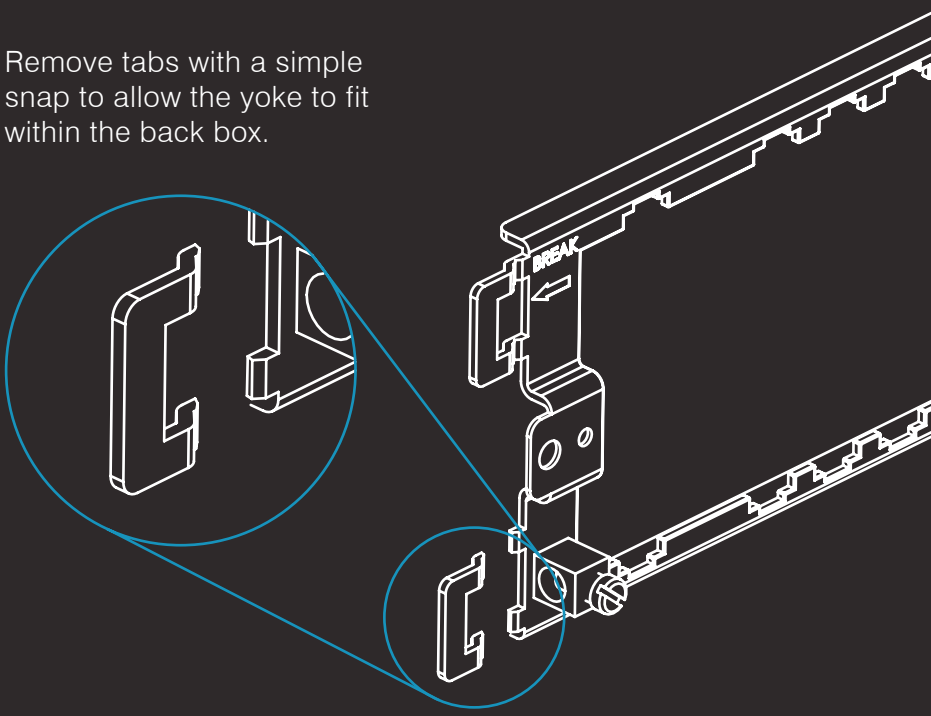

Clip Feature Assembly

1. Fit and secure appropriate back box and yoke, (for Define® and Metal Clad remove tabs on yoke). Pull the cable through yoke and strip insulation accordingly. Ensure an earth connection between frame and yoke (if required).

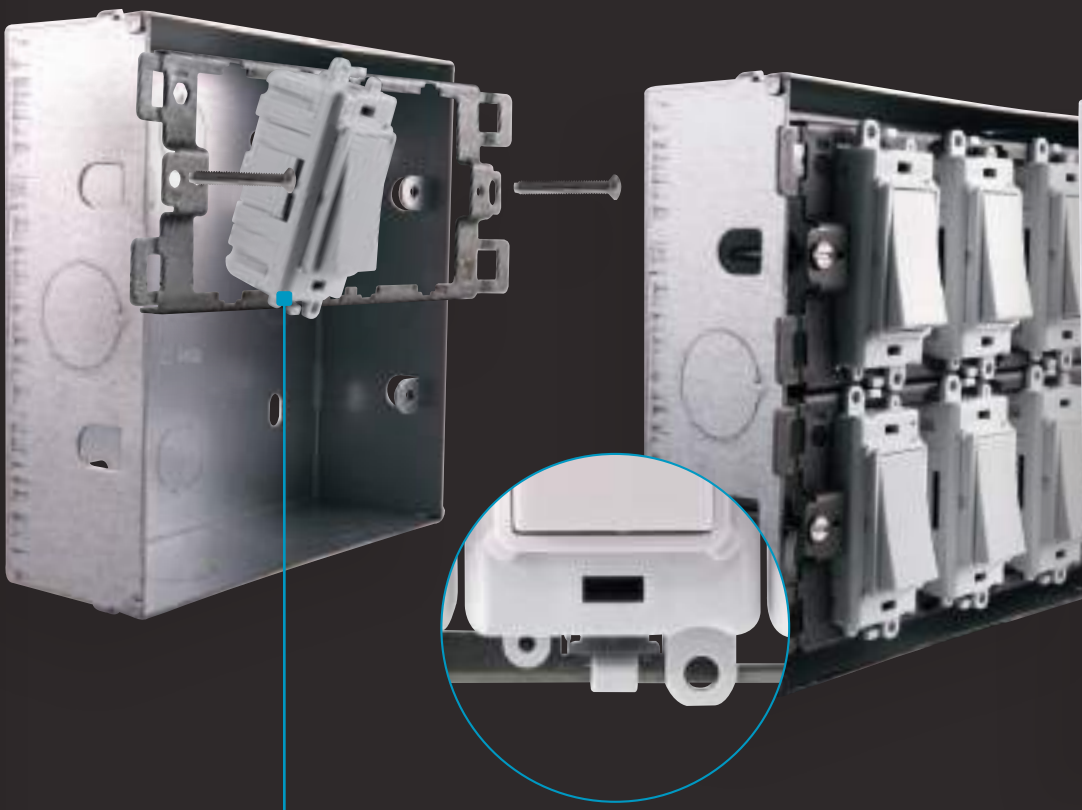

2. Systematically terminate cables into each module. Clip modules into yoke with a pivot motion.

GRIDPRO®

MODE® polar™ deco® deco PLUS®


CLIP-ON MODULES



3. Attach GridPro® frontplate using the fixing screws provided.

Screw Feature Assembly

1. Fit and secure appropriate back box, pull cable through frame and strip insulation accordingly.

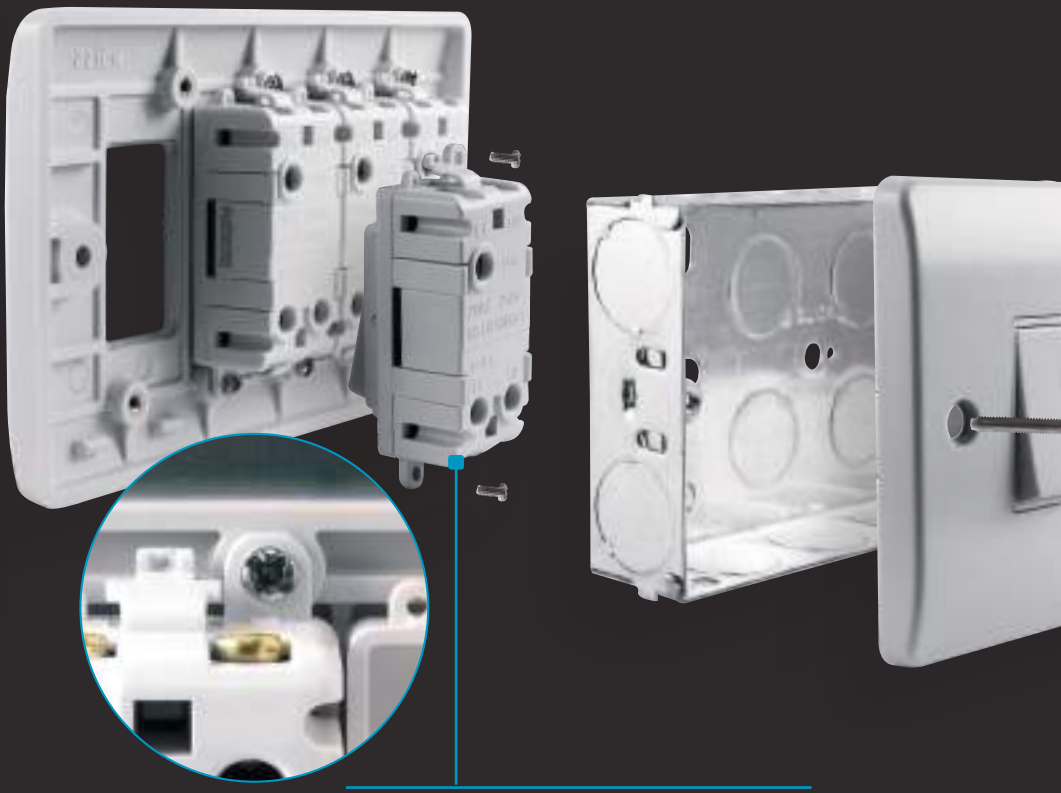


2. Screw each module into the GridPro® frontplate with the screws provided and systematically terminate cables into each module.

GRIDPRO®

essentials™ define® MODE® polar™ deco® deco PLUS

NO YOKE SCREW-IN MODULES

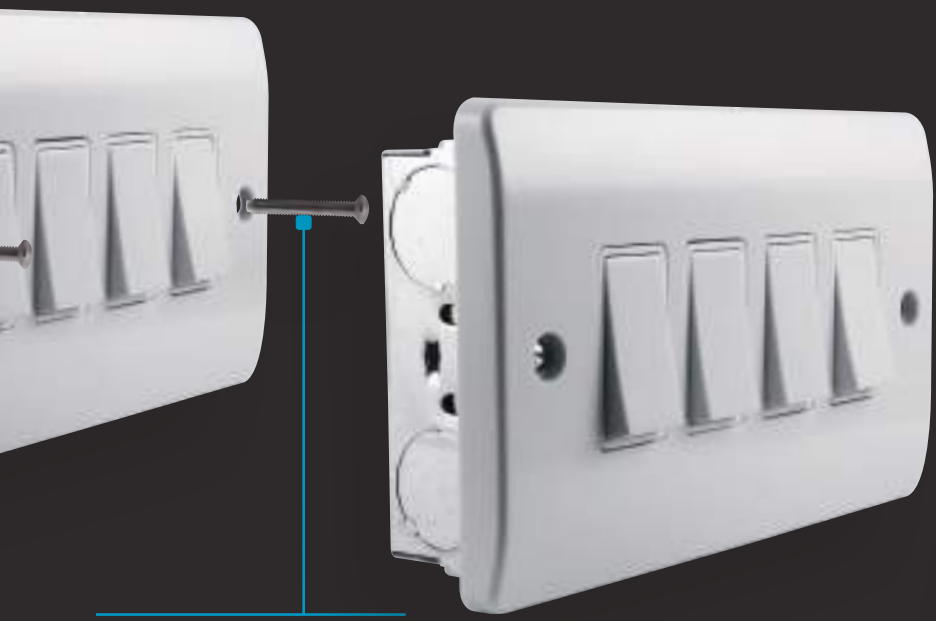

3. Attach the GridPro® frontplate using the fixing screws provided.



Module Finishes

All GridPro® modules featured in this brochure are available in eleven distinctive, quality finishes, with black or white inserts, excluding antique brass and black nickel finishes, which are available with black inserts only.

The GridPro® module rockers are styled to match the existing range of Click® wiring accessories to complement any existing Click® installation.

A simple code structure signifies the module colour and product finish...

GM	2001	BK	CH
GridPro® Module	Product	Module Colour	Product Finish

*UK Design Registration 3015621.



Brushed Stainless*
(BS)



Polished Brass
(BR)



Stainless Steel
(SS)



Satin Brass*
(SB)



Satin Chrome*
(SC)



Polished Chrome
(CH)



Pearl Nickel
(PN)



Black
(BK)



White
(PW)



Black Nickel
(BN)



Antique Brass*
(AB)



GM2001PW



GM2001PWPN



GM2001PWSB



GM2001PWSS



GM2001BK



GM2001BKBR



GM2001BKBS




MODULE BACK

20AX 1 Way Switch Modules


GM2001PW	20AX 1 Way Switch Module - White
GM2001BK	20AX 1 Way Switch Module - Black
GM2001PWBR	20AX 1 Way Switch Module - White - Polished Brass
GM2001PWBS	20AX 1 Way Switch Module - White - Brushed Stainless
GM2001PWCH	20AX 1 Way Switch Module - White - Polished Chrome
GM2001PWPN	20AX 1 Way Switch Module - White - Pearl Nickel
GM2001PWSB	20AX 1 Way Switch Module - White - Satin Brass
GM2001PWSC	20AX 1 Way Switch Module - White - Satin Chrome
GM2001PWSS	20AX 1 Way Switch Module - White - Stainless Steel
GM2001BKAB	20AX 1 Way Switch Module - Black - Antique Brass
GM2001BKBN	20AX 1 Way Switch Module - Black - Black Nickel
GM2001BKBR	20AX 1 Way Switch Module - Black - Polished Brass
GM2001BKBS	20AX 1 Way Switch Module - Black - Brushed Stainless
GM2001BKCH	20AX 1 Way Switch Module - Black - Polished Chrome
GM2001BKPN	20AX 1 Way Switch Module - Black - Pearl Nickel
GM2001BKSB	20AX 1 Way Switch Module - Black - Satin Brass
GM2001BKSC	20AX 1 Way Switch Module - Black - Satin Chrome
GM2001BKSS	20AX 1 Way Switch Module - Black - Stainless Steel

Standards: Switch Modules: BS EN 60669-1
Back Box Depth: 25mm Minimum **Cable Size:** 2 x 4mm, 3 x 2.5mm, 1 x 6mm

DIMENSIONS (mm)

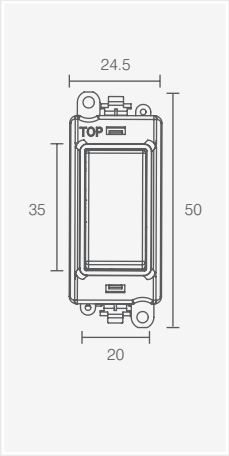

TYPICAL 1 WAY SWITCHED CIRCUIT

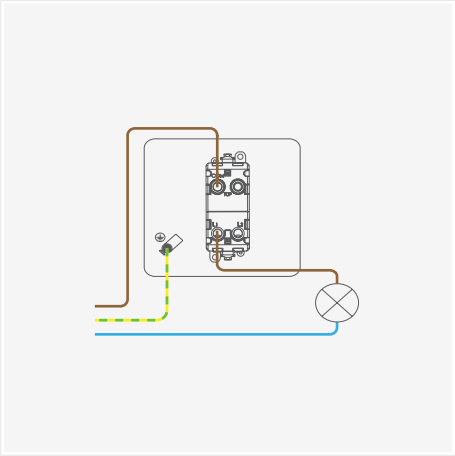

Material Composition	Rocker Switch: Urea or Urea + Stainless Steel Cover (Ingot) Cover, Insert & Rear Housing: Nylon Terminals: Brass Terminal Screws: Steel & Yellow Passivated Silver "on-lay" Copper / Brass Contacts
Voltage	250V~ 50Hz
Current Rating	20AX (suitable for inductive loads)
Terminal Size	5mm ø
Torque Value	1.2Nm
Cable Size	2 x 4mm², 3 x 2.5mm² or 1 x 6mm²
Back Box Depth	25mm - 47mm (Deco*, Deco Plus*, Mode*, Polar*) 35mm - 47mm (Define*, Definity*)
Modular	Yes
Warranty	10 Years
Antimicrobial Certified	Yes (Non Ingot Switches Only)
IP Rating	IP20
Operational Temperature	-5°C to +40°C
Standards	BS EN 60669-1:1999 + A1:2002 + A2:2008

Additional Information:
Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product.
These products are rated at 20AX; therefore all terminals should not exceed the stated amperage.
Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.
All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products were independently tested and achieved a 99.9% kill rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, and Klebsiella Pneumoniae.



GM2002PWCH



GM2002PWBR



GM2002PWSC



GM2002PWBS



GM2002BKBN



GM2002BKAB



GM2002BKSS




MODULE BACK

20AX 2 Way Switch Modules


GM2002PW	20AX 2 Way Switch Module - White
GM2002BK	20AX 2 Way Switch Module - Black
GM2002PWBR	20AX 2 Way Switch Module - White - Polished Brass
GM2002PWBS	20AX 2 Way Switch Module - White - Brushed Stainless
GM2002PWCH	20AX 2 Way Switch Module - White - Polished Chrome
GM2002PWPN	20AX 2 Way Switch Module - White - Pearl Nickel
GM2002PWSB	20AX 2 Way Switch Module - White - Satin Brass
GM2002PWSC	20AX 2 Way Switch Module - White - Satin Chrome
GM2002PWSS	20AX 2 Way Switch Module - White - Stainless Steel
GM2002BKAB	20AX 2 Way Switch Module - Black - Antique Brass
GM2002BKBN	20AX 2 Way Switch Module - Black - Black Nickel
GM2002BKBR	20AX 2 Way Switch Module - Black - Polished Brass
GM2002BKBS	20AX 2 Way Switch Module - Black - Brushed Stainless
GM2002BKCH	20AX 2 Way Switch Module - Black - Polished Chrome
GM2002BKPN	20AX 2 Way Switch Module - Black - Pearl Nickel
GM2002BKSB	20AX 2 Way Switch Module - Black - Satin Brass
GM2002BKSC	20AX 2 Way Switch Module - Black - Satin Chrome
GM2002BKSS	20AX 2 Way Switch Module - Black - Stainless Steel

Standards: Switch Modules: BS EN 60669-1
Back Box Depth: 25mm Minimum **Cable Size:** 2 x 4mm, 3 x 2.5mm, 1 x 6mm

DIMENSIONS (mm)



TYPICAL 2 WAY SWITCHED CIRCUIT

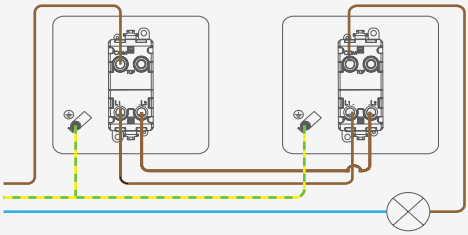

Material Composition	Rocker Switch: Urea or Urea + Stainless Steel Cover (Ingot) Cover, Insert & Rear Housing: Nylon Terminals: Brass Terminal Screws: Steel & Yellow Passivated Silver "on-lay" Copper / Brass Contacts
Voltage	250V~ 50Hz
Current Rating	20AX (suitable for inductive loads)
Terminal Size	5mm ø
Torque Value	1.2Nm
Cable Size	2 x 4mm², 3 x 2.5mm² or 1 x 6mm²
Back Box Depth	25mm - 47mm (Deco®, Deco Plus®, Mode®, Polar™) 35mm - 47mm (Define®, Definity™)
Modular	Yes
Warranty	10 Years
Antimicrobial Certified	Yes (Non Ingot Switches Only)
IP Rating	IP20
Operational Temperature	-5°C to +40°C
Standards	BS EN 60669-1:1999 + A1:2002 + A2:2008

Additional Information:

Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product. These products are rated at 20AX; therefore all terminals should not exceed the stated amperage.
Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.
All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products were independently tested and achieved a 99.9% kill rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, and Klebsiella Pneumoniae.



GM2004PW



GM2004PWPN



GM2004PWSB



GM2004PWSS



GM2004BK



GM2004BKCH



GM2004BKSC



MODULE BACK


Retractive switches are not suitable for use with fluorescent loads.

20AX 2 Way Retractive Switch Modules


GM2004PW	20AX 2 Way Retractive Switch Module - White
GM2004BK	20AX 2 Way Retractive Switch Module - Black
GM2004PWBR	20AX 2 Way Retractive Switch Module - White - Polished Brass
GM2004PWBS	20AX 2 Way Retractive Switch Module - White - Brushed Stainless
GM2004PWCH	20AX 2 Way Retractive Switch Module - White - Polished Chrome
GM2004PWPN	20AX 2 Way Retractive Switch Module - White - Pearl Nickel
GM2004PWSB	20AX 2 Way Retractive Switch Module - White - Satin Brass
GM2004PWSC	20AX 2 Way Retractive Switch Module - White - Satin Chrome
GM2004PWSS	20AX 2 Way Retractive Switch Module - White - Stainless Steel
GM2004BKAB	20AX 2 Way Retractive Switch Module - Black - Antique Brass
GM2004BKBN	20AX 2 Way Retractive Switch Module - Black - Black Nickel
GM2004BKBR	20AX 2 Way Retractive Switch Module - Black - Polished Brass
GM2004BKBS	20AX 2 Way Retractive Switch Module - Black - Brushed Stainless
GM2004BKCH	20AX 2 Way Retractive Switch Module - Black - Polished Chrome
GM2004BKPN	20AX 2 Way Retractive Switch Module - Black - Pearl Nickel
GM2004BKSB	20AX 2 Way Retractive Switch Module - Black - Satin Brass
GM2004BKSC	20AX 2 Way Retractive Switch Module - Black - Satin Chrome
GM2004BKSS	20AX 2 Way Retractive Switch Module - Black - Stainless Steel

Standards: Switch Modules: BS EN 60669-1
Back Box Depth: 25mm Minimum **Cable Size:** 2 x 4mm, 3 x 2.5mm, 1 x 6mm

DIMENSIONS (mm)



TYPICAL 2 WAY RETRACTIVE SWITCH CIRCUIT



Material Composition	Rocker Switch: Urea or Urea + Stainless Steel Cover (Ingot) Cover, Insert & Rear Housing: Nylon Terminals: Brass Terminal Screws: Steel & Yellow Passivated Silver "on-lay" Copper / Brass Contacts
Voltage	250V~ 50Hz
Current Rating	20AX
Terminal Size	5mm ø
Torque Value	1.2Nm
Cable Size	2 x 4mm², 3 x 2.5mm² or 1 x 6mm²
Back Box Depth	25mm - 47mm (Deco®, Deco Plus®, Mode®, Polar™) 35mm - 47mm (Define®, Definity™)
Modular	Yes
Warranty	10 Years
Antimicrobial Certified	Yes (Non Ingot Switches Only)
IP Rating	IP20
Operational Temperature	-5°C to +40°C
Standards	BS EN 60669-1:1999 + A1:2002 + A2:2008

Additional Information:
Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product. These products are rated at 20AX; therefore all terminals should not exceed the stated amperage.
Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.
All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products were independently tested and achieved a 99.9% kill rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, and Klebsiella Pneumoniae.



GM2028PWCH



GM2028PWBR



GM2028PWSC



GM2028PWBS



GM2028BKBN



GM2028BKPN



GM2028BKSB




MODULE BACK

20AX Intermediate Switch Modules


GM2028PW	20AX Intermediate Switch Module - White
GM2028BK	20AX Intermediate Switch Module - Black
GM2028PWBR	20AX Intermediate Switch Module - White - Polished Brass
GM2028PWBS	20AX Intermediate Switch Module - White - Brushed Stainless
GM2028PWCH	20AX Intermediate Switch Module - White - Polished Chrome
GM2028PWPN	20AX Intermediate Switch Module - White - Pearl Nickel
GM2028PWSB	20AX Intermediate Switch Module - White - Satin Brass
GM2028PWSC	20AX Intermediate Switch Module - White - Satin Chrome
GM2028PWSS	20AX Intermediate Switch Module - White - Stainless Steel
GM2028BKAB	20AX Intermediate Switch Module - Black - Antique Brass
GM2028BKBN	20AX Intermediate Switch Module - Black - Black Nickel
GM2028BKBR	20AX Intermediate Switch Module - Black - Polished Brass
GM2028BKBS	20AX Intermediate Switch Module - Black - Brushed Stainless
GM2028BKCH	20AX Intermediate Switch Module - Black - Polished Chrome
GM2028BKPN	20AX Intermediate Switch Module - Black - Pearl Nickel
GM2028BKSB	20AX Intermediate Switch Module - Black - Satin Brass
GM2028BKSC	20AX Intermediate Switch Module - Black - Satin Chrome
GM2028BKSS	20AX Intermediate Switch Module - Black - Stainless Steel

Standards: Switch Modules: BS EN 60669-1
Back Box Depth: 25mm Minimum **Cable Size:** 2 x 4mm, 3 x 2.5mm, 1 x 6mm

DIMENSIONS (mm)



TYPICAL INTERMEDIATE SWITCHED CIRCUIT

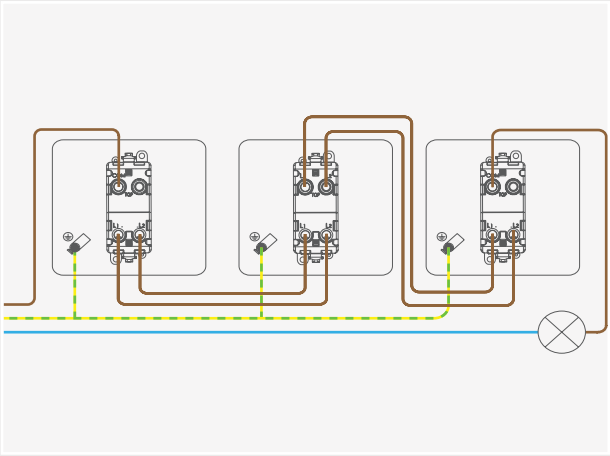

Material Composition	Rocker Switch: Urea or Urea + Stainless Steel Cover (Ingot) Cover, Insert & Rear Housing: Nylon Terminals: Brass Terminal Screws: Steel & Yellow Passivated Silver "on-lay" Copper / Brass Contacts
Voltage	250V~ 50Hz
Current Rating	20AX (suitable for inductive loads)
Terminal Size	5mm ø
Torque Value	1.2Nm
Cable Size	2 x 4mm², 3 x 2.5mm² or 1 x 6mm²
Back Box Depth	25mm - 47mm (Deco*, Deco Plus*, Mode*, Polar*) 35mm - 47mm (Define*, Definity*)
Modular	Yes
Warranty	10 Years
Antimicrobial Certified	Yes (Non Ingot Switches Only)
IP Rating	IP20
Operational Temperature	-5°C to +40°C
Standards	BS EN 60669-1:1999 + A1:2002 + A2:2008

Additional Information:
Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product.
These products are rated at 20AX; therefore all terminals should not exceed the stated amperage.
Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.
All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products were independently tested and achieved a 99.9% kill rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, and Klebsiella Pneumoniae.



GM2018PW



GM2018PWPN



GM2018PWSB



GM2018PWSS



GM2018BK



GM2018BKBR



GM2018BKBS




MODULE BACK

20AX Double Pole Switch Modules


GM2018PW	20AX Double Pole Switch Module - White
GM2018BK	20AX Double Pole Switch Module - Black
GM2018PWBR	20AX Double Pole Switch Module - White - Polished Brass
GM2018PWBS	20AX Double Pole Switch Module - White - Brushed Stainless
GM2018PWCH	20AX Double Pole Switch Module - White - Polished Chrome
GM2018PWPN	20AX Double Pole Switch Module - White - Pearl Nickel
GM2018PWSB	20AX Double Pole Switch Module - White - Satin Brass
GM2018PWSC	20AX Double Pole Switch Module - White - Satin Chrome
GM2018PWSS	20AX Double Pole Switch Module - White - Stainless Steel
GM2018BKAB	20AX Double Pole Switch Module - Black - Antique Brass
GM2018BKBN	20AX Double Pole Switch Module - Black - Black Nickel
GM2018BKBR	20AX Double Pole Switch Module - Black - Polished Brass
GM2018BKBS	20AX Double Pole Switch Module - Black - Brushed Stainless
GM2018BKCH	20AX Double Pole Switch Module - Black - Polished Chrome
GM2018BKPN	20AX Double Pole Switch Module - Black - Pearl Nickel
GM2018BKSB	20AX Double Pole Switch Module - Black - Satin Brass
GM2018BKSC	20AX Double Pole Switch Module - Black - Satin Chrome
GM2018BKSS	20AX Double Pole Switch Module - Black - Stainless Steel

Standards: Switch Modules: BS EN 60669-1
Back Box Depth: 25mm Minimum **Cable Size:** 2 x 4mm, 3 x 2.5mm, 1 x 6mm

DIMENSIONS (mm)

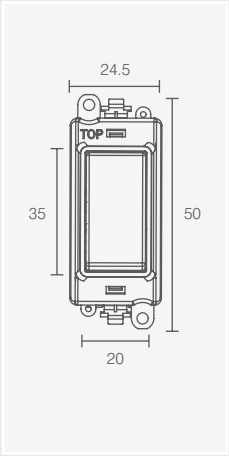

TYPICAL WIRING DIAGRAM

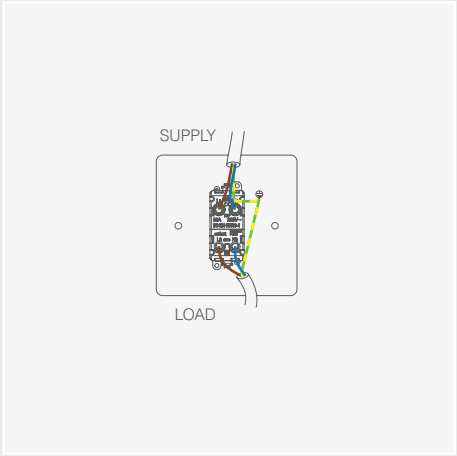

Material Composition	Rocker Switch: Urea or Urea + Stainless Steel Cover (Ingot) Cover, Insert & Rear Housing: Nylon Terminals: Brass, Terminal Screws: Steel & Yellow Passivated Silver "on-lay" Copper / Brass Contacts
Voltage	250V~ 50Hz
Current Rating	20AX
Terminal Size	5mm ø
Torque Value	1.2Nm
Cable Size	2 x 4mm², 3 x 2.5mm² or 1 x 6mm²
Back Box Depth	25mm - 47mm (Deco®, Deco Plus®, Mode®, Polar®) 35mm - 47mm (Define®, Definity®)
Double Pole	Yes
Modular	Yes
Warranty	10 Years
Antimicrobial Certified	Yes (Non Ingot Switches Only)
IP Rating	IP20
Operational Temperature	-5°C to +40°C
Standards	BS EN 60669-1:1999 + A1:2002 + A2:2008

Additional Information:

Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product. These products are rated at 20AX; therefore all terminals should not exceed the stated amperage.
Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.
All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products were independently tested and achieved a 99.9% kill rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, and Klebsiella Pneumoniae.



GM2018PW-CH



GM2018PWS-TD



GM2018BK-BL



MODULE BACK

The GM2018 modules listed are available with the following laser etched legends:

-WM	Washing Machine
-FD	Fridge
-TD	Tumble Dryer
-FZ	Freezer
-FF	Fridge Freezer
-FN	Fan
-DW	Dishwasher
-HB	Hob
-MW	Microwave
-BL	Boiler
-WD	Waste Disposal
-OV	Oven
-CH	Cooker Hood
-WH	Water Heater

Suffix the two letters to complete the product code with legend eg. GM2018PWCH-WM


IN HOUSE LASER ETCHING
Our in house laser printer provides flexibility to suit large volume batch or custom jobs.
The precision, permanent, fine marking effect is customisable, offering you and your customers a wider variety of options.

20AX Double Pole Switch Modules - Printed Legend


GM2018PW	20AX Double Pole Switch Module - White
GM2018BK	20AX Double Pole Switch Module - Black
GM2018PWBR	20AX Double Pole Switch Module - White - Polished Brass
GM2018PWBS	20AX Double Pole Switch Module - White - Brushed Stainless
GM2018PWCH	20AX Double Pole Switch Module - White - Polished Chrome
GM2018PWPN	20AX Double Pole Switch Module - White - Pearl Nickel
GM2018PWSB	20AX Double Pole Switch Module - White - Satin Brass
GM2018PWSC	20AX Double Pole Switch Module - White - Satin Chrome
GM2018PWSS	20AX Double Pole Switch Module - White - Stainless Steel
GM2018BKAB	20AX Double Pole Switch Module - Black - Antique Brass
GM2018BKBN	20AX Double Pole Switch Module - Black - Black Nickel
GM2018BKBR	20AX Double Pole Switch Module - Black - Polished Brass
GM2018BKBS	20AX Double Pole Switch Module - Black - Brushed Stainless
GM2018BKCH	20AX Double Pole Switch Module - Black - Polished Chrome
GM2018BKPN	20AX Double Pole Switch Module - Black - Pearl Nickel
GM2018BKSB	20AX Double Pole Switch Module - Black - Satin Brass
GM2018BKSC	20AX Double Pole Switch Module - Black - Satin Chrome
GM2018BKSS	20AX Double Pole Switch Module - Black - Stainless Steel

Standards: Switch Modules: BS EN 60669-1
Back Box Depth: 25mm Minimum **Cable Size:** 2 x 4mm, 3 x 2.5mm, 1 x 6mm

DIMENSIONS (mm)

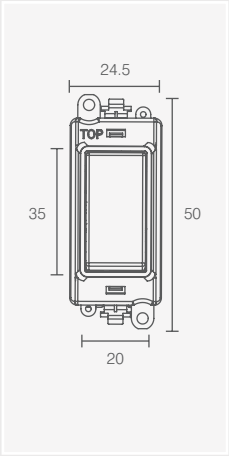

TYPICAL WIRING DIAGRAM

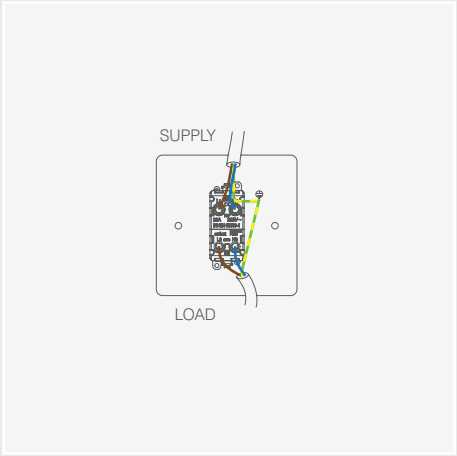

Material Composition	Rocker Switch: Urea or Urea + Stainless Steel Cover (Ingot) Cover, Insert & Rear Housing: Nylon Terminals: Brass, Terminal Screws: Steel & Yellow Passivated Silver "on-lay" Copper / Brass Contacts
Voltage	250V~ 50Hz
Current Rating	20AX
Terminal Size	5mm ø
Torque Value	1.2Nm
Cable Size	2 x 4mm², 3 x 2.5mm² or 1 x 6mm²
Back Box Depth	25mm - 47mm (Deco*, Deco Plus®, Mode*, Polar*) 35mm - 47mm (Define*, Definity*)
Double Pole	Yes
Modular	Yes
Warranty	10 Years
Antimicrobial Certified	Yes (Non Ingot Switches Only)
IP Rating	IP20
Operational Temperature	-5°C to +40°C
Standards	BS EN 60669-1:1999 + A1:2002 + A2:2008

Additional Information:
Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product.
These products are rated at 20AX; therefore all terminals should not exceed the stated amperage.
Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.
All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products were independently tested and achieved a 99.9% kill rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, and Klebsiella Pneumoniae.



GM2018NPWCH



GM2018NPWBR



GM2018NPWSC



GM2018NPWBS



GM2018NBKBN



GM2018NBKPN



GM2018NBKSB




MODULE BACK

20AX Double Pole Switch Modules with Neon


GM2018NPW	20AX Double Pole Switch With Neon Module - White
GM2018NBK	20AX Double Pole Switch With Neon Module - Black
GM2018NPWBR	20AX Double Pole Switch With Neon Module - White - Polished Brass
GM2018NPWBS	20AX Double Pole Switch With Neon Module - White - Brushed Stainless
GM2018NPWCH	20AX Double Pole Switch With Neon Module - White - Polished Chrome
GM2018NPWPN	20AX Double Pole Switch With Neon Module - White - Pearl Nickel
GM2018NPWSB	20AX Double Pole Switch With Neon Module - White - Satin Brass
GM2018NPWSC	20AX Double Pole Switch With Neon Module - White - Satin Chrome
GM2018NPWSS	20AX Double Pole Switch With Neon Module - White - Stainless Steel
GM2018NBKAB	20AX Double Pole Switch With Neon Module - Black - Antique Brass
GM2018NBKBN	20AX Double Pole Switch With Neon Module - Black - Black Nickel
GM2018NBKBR	20AX Double Pole Switch With Neon Module - Black - Polished Brass
GM2018NBKBS	20AX Double Pole Switch With Neon Module - Black - Brushed Stainless
GM2018NBKCH	20AX Double Pole Switch With Neon Module - Black - Polished Chrome
GM2018NBKPN	20AX Double Pole Switch With Neon Module - Black - Pearl Nickel
GM2018NBKSB	20AX Double Pole Switch With Neon Module - Black - Satin Brass
GM2018NBKSC	20AX Double Pole Switch With Neon Module - Black - Satin Chrome
GM2018NBKSS	20AX Double Pole Switch With Neon Module - Black - Stainless Steel

Standards: Switch Modules: BS EN 60669-1
Back Box Depth: 25mm Minimum **Cable Size:** 2 x 4mm, 3 x 2.5mm, 1 x 6mm

DIMENSIONS (mm)

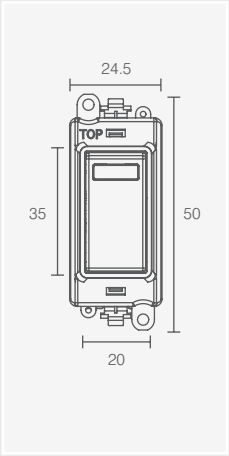

TYPICAL WIRING DIAGRAM

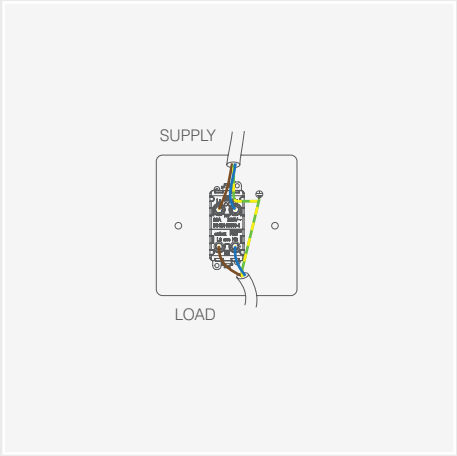

Material Composition	Rocker Switch: Urea or Urea + Stainless Steel Cover (Ingot) Cover, Insert & Rear Housing: Nylon Terminals: Brass, Terminal Screws: Steel & Yellow Passivated Silver "on-lay" Copper / Brass Contacts
Voltage	250V~ 50Hz
Current Rating	20AX
Terminal Size	5mm ø
Torque Value	1.2Nm
Cable Size	2 x 4mm², 3 x 2.5mm² or 1 x 6mm²
Back Box Depth	25mm - 47mm (Deco*, Deco Plus®, Mode*, Polar*) 35mm - 47mm (Define*, Definity*)
Double Pole	Yes
Modular	Yes
Warranty	10 Years
Antimicrobial Certified	Yes (Non Ingot Switches Only)
IP Rating	IP20
Operational Temperature	-5°C to +40°C
Standards	BS EN 60669-1:1999 + A1:2002 + A2:2008

Additional Information:
Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product.
These products are rated at 20AX; therefore all terminals should not exceed the stated amperage.
Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.
All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products were independently tested and achieved a 99.9% kill rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, and Klebsiella Pneumoniae.



GM2018NPWSC-DW



GM2018NPWSB-WM



GM2018NBKAB-OV



MODULE BACK

The GM2018N modules listed are available with the following laser etched legends:

WM	Washing Machine
FD	Fridge
TD	Tumble Dryer
FZ	Freezer
FF	Fridge Freezer
FN	Fan
DW	Dishwasher
HB	Hob
MW	Microwave
BL	Boiler
WD	Waste Disposal
OV	Oven
CH	Cooker Hood
WH	Water Heater

Suffix the two letters to complete the product code with legend eg. GM2018NPWCH-WM


IN HOUSE LASER ETCHING
Our in house laser printer provides flexibility to suit large volume batch or custom jobs.
The precision, permanent, fine marking effect is customisable, offering you and your customers a wider variety of options.

20AX Double Pole Switch Modules with Neon - Printed Legend


GM2018NPW	20AX Double Pole Switch With Neon Module - White
GM2018NBK	20AX Double Pole Switch With Neon Module - Black
GM2018NPWBR	20AX Double Pole Switch With Neon Module - White - Polished Brass
GM2018NPWBS	20AX Double Pole Switch With Neon Module - White - Brushed Stainless
GM2018NPWCH	20AX Double Pole Switch With Neon Module - White - Polished Chrome
GM2018NPWPN	20AX Double Pole Switch With Neon Module - White - Pearl Nickel
GM2018NPWSB	20AX Double Pole Switch With Neon Module - White - Satin Brass
GM2018NPWSC	20AX Double Pole Switch With Neon Module - White - Satin Chrome
GM2018NPWSS	20AX Double Pole Switch With Neon Module - White - Stainless Steel
GM2018NBKAB	20AX Double Pole Switch With Neon Module - Black - Antique Brass
GM2018NBKBN	20AX Double Pole Switch With Neon Module - Black - Black Nickel
GM2018NBKBR	20AX Double Pole Switch With Neon Module - Black - Polished Brass
GM2018NBKBS	20AX Double Pole Switch With Neon Module - Black - Brushed Stainless
GM2018NBKCH	20AX Double Pole Switch With Neon Module - Black - Polished Chrome
GM2018NBKPN	20AX Double Pole Switch With Neon Module - Black - Pearl Nickel
GM2018NBKSB	20AX Double Pole Switch With Neon Module - Black - Satin Brass
GM2018NBKSC	20AX Double Pole Switch With Neon Module - Black - Satin Chrome
GM2018NBKSS	20AX Double Pole Switch With Neon Module - Black - Stainless Steel

Standards: Switch Modules: BS EN 60669-1
Back Box Depth: 25mm Minimum **Cable Size:** 2 x 4mm, 3 x 2.5mm, 1 x 6mm

DIMENSIONS (mm)

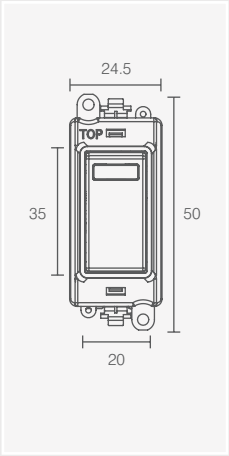

TYPICAL WIRING DIAGRAM

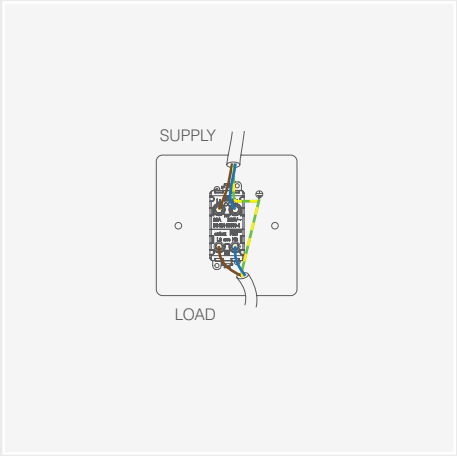

Material Composition	Rocker Switch: Urea or Urea + Stainless Steel Cover (Ingot) Cover, Insert & Rear Housing: Nylon Terminals: Brass, Terminal Screws: Steel & Yellow Passivated Silver "on-lay" Copper / Brass Contacts
Voltage	250V~ 50Hz
Current Rating	20AX
Terminal Size	5mm ø
Torque Value	1.2Nm
Cable Size	2 x 4mm², 3 x 2.5mm² or 1 x 6mm²
Back Box Depth	25mm - 47mm (Deco*, Deco Plus®, Mode*, Polar*) 35mm - 47mm (Define*, Definity*)
Double Pole	Yes
Modular	Yes
Warranty	10 Years
Antimicrobial Certified	Yes (Non Ingot Switches Only)
IP Rating	IP20
Operational Temperature	-5°C to +40°C
Standards	BS EN 60669-1:1999 + A1:2002 + A2:2008

Additional Information:
Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product.
These products are rated at 20AX; therefore all terminals should not exceed the stated amperage.
Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.
All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products were independently tested and achieved a 99.9% kill rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, and Klebsiella Pneumoniae.



GM2070PWCH



GM2070PWBR



GM2070PWSC



GM2070PWBS



GM2070BKBN



GM2070BKAB



GM2070BKSS




MODULE BACK

20AX 3 Position Switch Modules


GM2070PW	20AX 3 Position Switch Module - White
GM2070BK	20AX 3 Position Switch Module - Black
GM2070PWBR	20AX 3 Position Switch Module - White - Polished Brass
GM2070PWBS	20AX 3 Position Switch Module - White - Brushed Stainless
GM2070PWCH	20AX 3 Position Switch Module - White - Polished Chrome
GM2070PWPN	20AX 3 Position Switch Module - White - Pearl Nickel
GM2070PWSB	20AX 3 Position Switch Module - White - Satin Brass
GM2070PWSC	20AX 3 Position Switch Module - White - Satin Chrome
GM2070PWSS	20AX 3 Position Switch Module - White - Stainless Steel
GM2070BKAB	20AX 3 Position Switch Module - Black - Antique Brass
GM2070BKBN	20AX 3 Position Switch Module - Black - Black Nickel
GM2070BKBR	20AX 3 Position Switch Module - Black - Polished Brass
GM2070BKBS	20AX 3 Position Switch Module - Black - Brushed Stainless
GM2070BKCH	20AX 3 Position Switch Module - Black - Polished Chrome
GM2070BKPN	20AX 3 Position Switch Module - Black - Pearl Nickel
GM2070BKSB	20AX 3 Position Switch Module - Black - Satin Brass
GM2070BKSC	20AX 3 Position Switch Module - Black - Satin Chrome
GM2070BKSS	20AX 3 Position Switch Module - Black - Stainless Steel

Standards: Switch Modules: BS EN 60669-1
Back Box Depth: 25mm Minimum **Cable Size:** 2 x 4mm, 3 x 2.5mm, 1 x 6mm

DIMENSIONS (mm)



TYPICAL 3 POSITION SWITCHED CIRCUIT



Material Composition	Rocker Switch: Urea or Urea + Stainless Steel Cover (Ingot) Cover, Insert & Rear Housing: Nylon Terminals: Brass Terminal Screws: Steel & Yellow Passivated Silver "on-lay" Copper / Brass Contacts
Voltage	250V~ 50Hz
Current Rating	20AX (suitable for inductive loads)
Terminal Size	5mm ø
Torque Value	1.2Nm
Cable Size	2 x 4mm², 3 x 2.5mm² or 1 x 6mm²
Back Box Depth	25mm - 47mm (Deco®, Deco Plus®, Mode®, Polar™) 35mm - 47mm (Define®, Definity™)
Modular	Yes
Warranty	10 Years
Antimicrobial Certified	Yes (Non Ingot Switches Only)
IP Rating	IP20
Operational Temperature	-5°C to +40°C
Standards	BS EN 60669-1:1999 + A1:2002 + A2:2008

Additional Information:

Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product. These products are rated at 20AX; therefore all terminals should not exceed the stated amperage.
Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.
All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products were independently tested and achieved a 99.9% kill rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, and Klebsiella Pneumoniae.



GM2075PW



GM2075PWPN



GM2075PWSB



GM2075PWSS



GM2075BK



GM2075BKCH



GM2075BKSC



MODULE BACK


Retractive switches are not suitable for use with fluorescent loads.

20AX 3 Position Retractive Switch Modules


GM2075PW	20AX 3 Position Retractive Switch Module - White
GM2075BK	20AX 3 Position Retractive Switch Module - Black
GM2075PWBR	20AX 3 Position Retractive Switch Module - White - Polished Brass
GM2075PWBS	20AX 3 Position Retractive Switch Module - White - Brushed Stainless
GM2075PWCH	20AX 3 Position Retractive Switch Module - White - Polished Chrome
GM2075PWPN	20AX 3 Position Retractive Switch Module - White - Pearl Nickel
GM2075PWSB	20AX 3 Position Retractive Switch Module - White - Satin Brass
GM2075PWSC	20AX 3 Position Retractive Switch Module - White - Satin Chrome
GM2075PWSS	20AX 3 Position Retractive Switch Module - White - Stainless Steel
GM2075BKAB	20AX 3 Position Retractive Switch Module - Black - Antique Brass
GM2075BKBN	20AX 3 Position Retractive Switch Module - Black - Black Nickel
GM2075BKBR	20AX 3 Position Retractive Switch Module - Black - Polished Brass
GM2075BKBS	20AX 3 Position Retractive Switch Module - Black - Brushed Stainless
GM2075BKCH	20AX 3 Position Retractive Switch Module - Black - Polished Chrome
GM2075BKPN	20AX 3 Position Retractive Switch Module - Black - Pearl Nickel
GM2075BKSB	20AX 3 Position Retractive Switch Module - Black - Satin Brass
GM2075BKSC	20AX 3 Position Retractive Switch Module - Black - Satin Chrome
GM2075BKSS	20AX 3 Position Retractive Switch Module - Black - Stainless Steel

Standards: Switch Modules: BS EN 60669-1
Back Box Depth: 25mm Minimum **Cable Size:** 2 x 4mm, 3 x 2.5mm, 1 x 6mm

DIMENSIONS (mm)

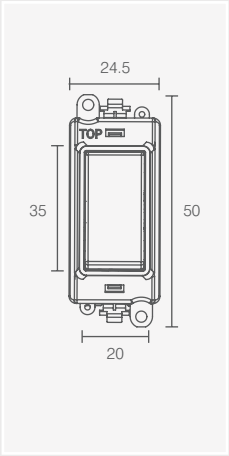

TYPICAL WIRING DIAGRAM

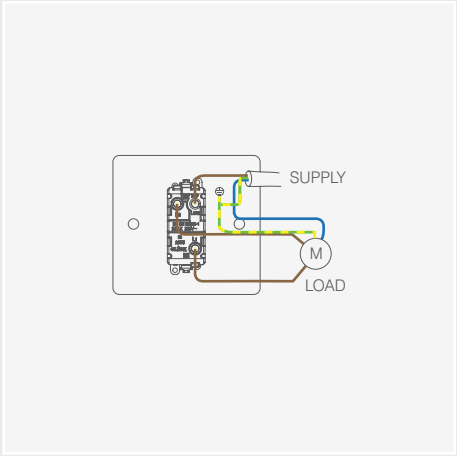

Material Composition	Rocker Switch: Urea or Urea + Stainless Steel Cover (Ingot) Cover, Insert & Rear Housing: Nylon Terminals: Brass Terminal Screws: Steel & Yellow Passivated Silver "on-lay" Copper / Brass Contacts
Voltage	250V~ 50Hz
Current Rating	20AX
Terminal Size	5mm ø
Torque Value	1.2Nm
Cable Size	2 x 4mm², 3 x 2.5mm² or 1 x 6mm²
Back Box Depth	25mm - 47mm (Deco*, Deco Plus*, Mode*, Polar*) 35mm - 47mm (Define*, Definity*)
Modular	Yes
Warranty	10 Years
Antimicrobial Certified	Yes (Non Ingot Switches Only)
IP Rating	IP20
Operational Temperature	-5°C to +40°C
Standards	BS EN 60669-1:1999 + A1:2002 + A2:2008

Additional Information:

Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product.
These products are rated at 20AX; therefore all terminals should not exceed the stated amperage.
Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.
All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products were independently tested and achieved a 99.9% kill rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, and Klebsiella Pneumoniae.



GM2003PW



GM2003PWPN



GM2003PWSB



GM2003PWSS



GM2003BK



GM2003BKBR



GM2003BKBS




MODULE BACK

20AX 2 Way Keyswitch Modules


GM2003PW	20AX 2 Way Keyswitch Module - White
GM2003BK	20AX 2 Way Keyswitch Module - Black
GM2003PWBR	20AX 2 Way Keyswitch Module - White - Polished Brass
GM2003PWBS	20AX 2 Way Keyswitch Module - White - Brushed Stainless
GM2003PWCH	20AX 2 Way Keyswitch Module - White - Polished Chrome
GM2003PWPN	20AX 2 Way Keyswitch Module - White - Pearl Nickel
GM2003PWSB	20AX 2 Way Keyswitch Module - White - Satin Brass
GM2003PWSC	20AX 2 Way Keyswitch Module - White - Satin Chrome
GM2003PWSS	20AX 2 Way Keyswitch Module - White - Stainless Steel
GM2003BKAB	20AX 2 Way Keyswitch Module - Black - Antique Brass
GM2003BKBN	20AX 2 Way Keyswitch Module - Black - Black Nickel
GM2003BKBR	20AX 2 Way Keyswitch Module - Black - Polished Brass
GM2003BKBS	20AX 2 Way Keyswitch Module - Black - Brushed Stainless
GM2003BKCH	20AX 2 Way Keyswitch Module - Black - Polished Chrome
GM2003BKPN	20AX 2 Way Keyswitch Module - Black - Pearl Nickel
GM2003BKSB	20AX 2 Way Keyswitch Module - Black - Satin Brass
GM2003BKSC	20AX 2 Way Keyswitch Module - Black - Satin Chrome
GM2003BKSS	20AX 2 Way Keyswitch Module - Black - Stainless Steel

Standards: Switch Modules: BS EN 60669-1
Back Box Depth: 25mm Minimum **Cable Size:** 2 x 4mm, 3 x 2.5mm, 1 x 6mm

DIMENSIONS (mm)



TYPICAL 2 WAY SWITCHED CIRCUIT

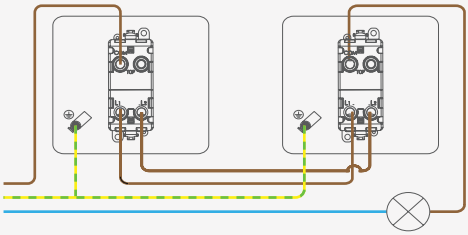

Material Composition	Rocker Switch: Urea or Urea + Stainless Steel Cover (Ingot) Cover, Insert & Rear Housing: Nylon Terminals: Brass Terminal Screws: Steel & Yellow Passivated Silver "on-lay" Copper / Brass Contacts
Voltage	250V~ 50Hz
Current Rating	20AX (suitable for inductive loads)
Terminal Size	5mm ø
Torque Value	1.2Nm
Cable Size	2 x 4mm², 3 x 2.5mm² or 1 x 6mm²
Back Box Depth	25mm - 47mm (Deco*, Deco Plus*, Mode*, Polar*) 35mm - 47mm (Define*, Definity*)
Modular	Yes
Warranty	10 Years
Antimicrobial Certified	Yes (Non Ingot Switches Only)
IP Rating	IP20
Operational Temperature	-5°C to +40°C
Standards	BS EN 60669-1:1999 + A1:2002 + A2:2008

Additional Information:

Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product. These products are rated at 20AX; therefore all terminals should not exceed the stated amperage.
Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.
All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products were independently tested and achieved a 99.9% kill rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, and Klebsiella Pneumoniae.



GM2014PW



GM2014PWPN



GM2014PWSB



GM2014PWSS



GM2014BK



GM2014BKCH



GM2014BKSC



MODULE BACK


Retractive switches are not suitable for use with fluorescent loads.

20AX 2 Way Retractive Keyswitch Modules


GM2014PW	20AX 2 Way Retractive Keyswitch Module - White
GM2014BK	20AX 2 Way Retractive Keyswitch Module - Black
GM2014PWBR	20AX 2 Way Retractive Keyswitch Module - White - Polished Brass
GM2014PWBS	20AX 2 Way Retractive Keyswitch Module - White - Brushed Stainless
GM2014PWCH	20AX 2 Way Retractive Keyswitch Module - White - Polished Chrome
GM2014PWPN	20AX 2 Way Retractive Keyswitch Module - White - Pearl Nickel
GM2014PWSB	20AX 2 Way Retractive Keyswitch Module - White - Satin Brass
GM2014PWSC	20AX 2 Way Retractive Keyswitch Module - White - Satin Chrome
GM2014PWSS	20AX 2 Way Retractive Keyswitch Module - White - Stainless Steel
GM2014BKAB	20AX 2 Way Retractive Keyswitch Module - Black - Antique Brass
GM2014BKBN	20AX 2 Way Retractive Keyswitch Module - Black - Black Nickel
GM2014BKBR	20AX 2 Way Retractive Keyswitch Module - Black - Polished Brass
GM2014BKBS	20AX 2 Way Retractive Keyswitch Module - Black - Brushed Stainless
GM2014BKCH	20AX 2 Way Retractive Keyswitch Module - Black - Polished Chrome
GM2014BKPN	20AX 2 Way Retractive Keyswitch Module - Black - Pearl Nickel
GM2014BKSB	20AX 2 Way Retractive Keyswitch Module - Black - Satin Brass
GM2014BKSC	20AX 2 Way Retractive Keyswitch Module - Black - Satin Chrome
GM2014BKSS	20AX 2 Way Retractive Keyswitch Module - Black - Stainless Steel

Standards: Switch Modules: BS EN 60669-1
Back Box Depth: 25mm Minimum **Cable Size:** 2 x 4mm, 3 x 2.5mm, 1 x 6mm

DIMENSIONS (mm)



TYPICAL RETRACTIVE SWITCH CIRCUIT



Material Composition	Rocker Switch: Urea or Urea + Stainless Steel Cover (Ingot) Cover, Insert & Rear Housing: Nylon Terminals: Brass Terminal Screws: Steel & Yellow Passivated Silver "on-lay" Copper / Brass Contacts
Voltage	250V~ 50Hz
Current Rating	20AX
Terminal Size	5mm ø
Torque Value	1.2Nm
Cable Size	2 x 4mm², 3 x 2.5mm² or 1 x 6mm²
Back Box Depth	25mm - 47mm (Deco*, Deco Plus®, Mode*, Polar~) 35mm - 47mm (Define*, Definity~)
Modular	Yes
Warranty	10 Years
Antimicrobial Certified	Yes (Non Ingot Switches Only)
IP Rating	IP20
Operational Temperature	-5°C to +40°C
Standards	BS EN 60669-1:1999 + A1:2002 + A2:2008

Additional Information:
Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product. These products are rated at 20AX; therefore all terminals should not exceed the stated amperage.
Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.
All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products were independently tested and achieved a 99.9% kill rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, and Klebsiella Pneumoniae.



GM2029PWCH



GM2029PWBR



GM2029PWSC



GM2029PWBS



GM2029BKBN



GM2029BKAB



GM2029BKSS




MODULE BACK

20AX Intermediate Keyswitch Modules


GM2029PW	20AX Intermediate Keyswitch Module - White
GM2029BK	20AX Intermediate Keyswitch Module - Black
GM2029PWBR	20AX Intermediate Keyswitch Module - White - Polished Brass
GM2029PWBS	20AX Intermediate Keyswitch Module - White - Brushed Stainless
GM2029PWCH	20AX Intermediate Keyswitch Module - White - Polished Chrome
GM2029PWPN	20AX Intermediate Keyswitch Module - White - Pearl Nickel
GM2029PWSB	20AX Intermediate Keyswitch Module - White - Satin Brass
GM2029PWSC	20AX Intermediate Keyswitch Module - White - Satin Chrome
GM2029PWSS	20AX Intermediate Keyswitch Module - White - Stainless Steel
GM2029BKAB	20AX Intermediate Keyswitch Module - Black - Antique Brass
GM2029BKBN	20AX Intermediate Keyswitch Module - Black - Black Nickel
GM2029BKBR	20AX Intermediate Keyswitch Module - Black - Polished Brass
GM2029BKBS	20AX Intermediate Keyswitch Module - Black - Brushed Stainless
GM2029BKCH	20AX Intermediate Keyswitch Module - Black - Polished Chrome
GM2029BKPN	20AX Intermediate Keyswitch Module - Black - Pearl Nickel
GM2029BKSB	20AX Intermediate Keyswitch Module - Black - Satin Brass
GM2029BKSC	20AX Intermediate Keyswitch Module - Black - Satin Chrome
GM2029BKSS	20AX Intermediate Keyswitch Module - Black - Stainless Steel

Standards: Switch Modules: BS EN 60669-1
Back Box Depth: 25mm Minimum **Cable Size:** 2 x 4mm, 3 x 2.5mm, 1 x 6mm

DIMENSIONS (mm)



TYPICAL INTERMEDIATE SWITCHED CIRCUIT

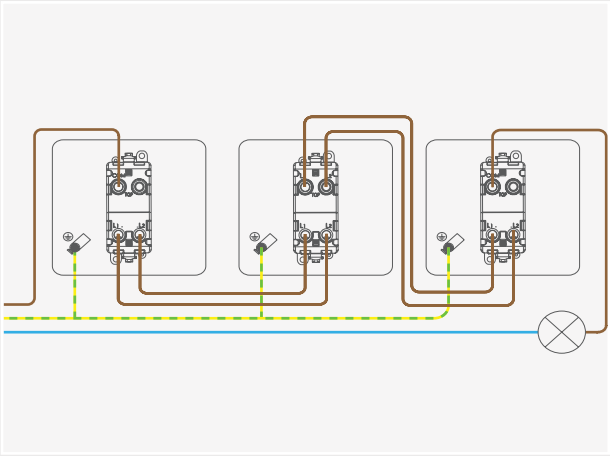

Material Composition	Rocker Switch: Urea or Urea + Stainless Steel Cover (Ingot) Cover, Insert & Rear Housing: Nylon Terminals: Brass Terminal Screws: Steel & Yellow Passivated Silver "on-lay" Copper / Brass Contacts
Voltage	250V~ 50Hz
Current Rating	20AX (suitable for inductive loads)
Terminal Size	5mm ø
Torque Value	1.2Nm
Cable Size	2 x 4mm², 3 x 2.5mm² or 1 x 6mm²
Back Box Depth	25mm - 47mm (Deco*, Deco Plus*, Mode*, Polar*) 35mm - 47mm (Define*, Definity*)
Modular	Yes
Warranty	10 Years
Antimicrobial Certified	Yes (Non Ingot Switches Only)
IP Rating	IP20
Operational Temperature	-5°C to +40°C
Standards	BS EN 60669-1:1999 + A1:2002 + A2:2008

Additional Information:
Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product. These products are rated at 20AX; therefore all terminals should not exceed the stated amperage.
Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.
All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products were independently tested and achieved a 99.9% kill rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, and Klebsiella Pneumoniae.



GM2046PWCH



GM2046PWBR



GM2046PWSC



GM2046PWBS



GM2046BKBN



GM2046BKPN



GM2046BKSB




MODULE BACK

20AX Double Pole Keyswitch Modules


GM2046PW	20AX Double Pole Keyswitch Module - White
GM2046BK	20AX Double Pole Keyswitch Module - Black
GM2046PWBR	20AX Double Pole Keyswitch Module - White - Polished Brass
GM2046PWBS	20AX Double Pole Keyswitch Module - White - Brushed Stainless
GM2046PWCH	20AX Double Pole Keyswitch Module - White - Polished Chrome
GM2046PWPN	20AX Double Pole Keyswitch Module - White - Pearl Nickel
GM2046PWSB	20AX Double Pole Keyswitch Module - White - Satin Brass
GM2046PWSC	20AX Double Pole Keyswitch Module - White - Satin Chrome
GM2046PWSS	20AX Double Pole Keyswitch Module - White - Stainless Steel
GM2046BKAB	20AX Double Pole Keyswitch Module - Black - Antique Brass
GM2046BKBN	20AX Double Pole Keyswitch Module - Black - Black Nickel
GM2046BKBR	20AX Double Pole Keyswitch Module - Black - Polished Brass
GM2046BKBS	20AX Double Pole Keyswitch Module - Black - Brushed Stainless
GM2046BKCH	20AX Double Pole Keyswitch Module - Black - Polished Chrome
GM2046BKPN	20AX Double Pole Keyswitch Module - Black - Pearl Nickel
GM2046BKSB	20AX Double Pole Keyswitch Module - Black - Satin Brass
GM2046BKSC	20AX Double Pole Keyswitch Module - Black - Satin Chrome
GM2046BKSS	20AX Double Pole Keyswitch Module - Black - Stainless Steel

Standards: Switch Modules: BS EN 60669-1
Back Box Depth: 25mm Minimum **Cable Size:** 2 x 4mm, 3 x 2.5mm, 1 x 6mm

DIMENSIONS (mm)

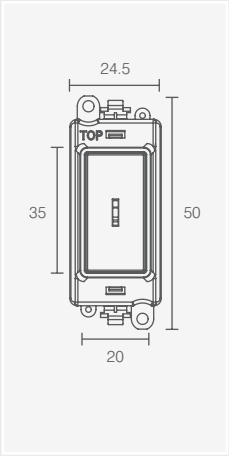

TYPICAL WIRING DIAGRAM

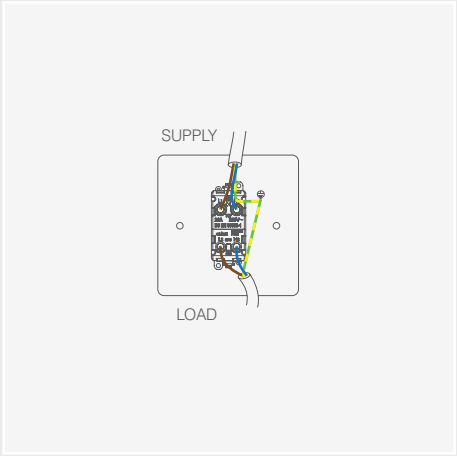

Material Composition	Rocker Switch: Urea or Urea + Stainless Steel Cover (Ingot) Cover, Insert & Rear Housing: Nylon Terminals: Brass, Terminal Screws: Steel & Yellow Passivated Silver "on-lay" Copper / Brass Contacts
Voltage	250V~ 50Hz
Current Rating	20AX
Terminal Size	5mm ø
Torque Value	1.2Nm
Cable Size	2 x 4mm², 3 x 2.5mm² or 1 x 6mm²
Back Box Depth	25mm - 47mm (Deco*, Deco Plus®, Mode*, Polar*) 35mm - 47mm (Define*, Definity*)
Double Pole	Yes
Modular	Yes
Warranty	10 Years
Antimicrobial Certified	Yes (Non Ingot Switches Only)
IP Rating	IP20
Operational Temperature	-5°C to +40°C
Standards	BS EN 60669-1:1999 + A1:2002 + A2:2008

Additional Information:

Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product. These products are rated at 20AX; therefore all terminals should not exceed the stated amperage.
Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.
All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products were independently tested and achieved a 99.9% kill rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, and Klebsiella Pneumoniae.


GM2046PW


GM2046PWPN


GM2046PWSB


GM2046PWSS


GM2046BK


GM2046BKCH


GM2046BKSC



MODULE BACK

20AX Double Pole Keyswitch Modules - 'Emergency Test'


GM2046BKET	20AX Double Pole Keyswitch 'Emergency Test' - Black
GM2046PWET	20AX Double Pole Keyswitch 'Emergency Test' - White
GM2046PWBRET	20AX Double Pole Keyswitch 'Emergency Test' - White - Polished Brass
GM2046PWBSET	20AX Double Pole Keyswitch 'Emergency Test' - White - Brushed Stainless
GM2046PWCHET	20AX Double Pole Keyswitch 'Emergency Test' - White - Polished Chrome
GM2046PWPNET	20AX Double Pole Keyswitch 'Emergency Test' - White - Pearl Nickel
GM2046PWSBET	20AX Double Pole Keyswitch 'Emergency Test' - White - Satin Brass
GM2046PWSCET	20AX Double Pole Keyswitch 'Emergency Test' - White - Satin Chrome
GM2046PWSSET	20AX Double Pole Keyswitch 'Emergency Test' - White - Stainless Steel
GM2046BKABET	20AX Double Pole Keyswitch 'Emergency Test' - Black - Antique Brass
GM2046BKBNET	20AX Double Pole Keyswitch 'Emergency Test' - Black - Black Nickel
GM2046BKBRET	20AX Double Pole Keyswitch 'Emergency Test' - Black - Polished Brass
GM2046BKBSET	20AX Double Pole Keyswitch 'Emergency Test' - Black - Brushed Stainless
GM2046BKCHET	20AX Double Pole Keyswitch 'Emergency Test' - Black - Polished Chrome
GM2046BKPNET	20AX Double Pole Keyswitch 'Emergency Test' - Black - Pearl Nickel
GM2046BKSBET	20AX Double Pole Keyswitch 'Emergency Test' - Black - Satin Brass
GM2046BKSCET	20AX Double Pole Keyswitch 'Emergency Test' - Black - Satin Chrome
GM2046BKSSET	20AX Double Pole Keyswitch 'Emergency Test' - Black - Stainless Steel

Standards: Switch Modules: BS EN 60669-1
Back Box Depth: 25mm Minimum **Cable Size:** 2 x 4mm, 3 x 2.5mm, 1 x 6mm

DIMENSIONS (mm)

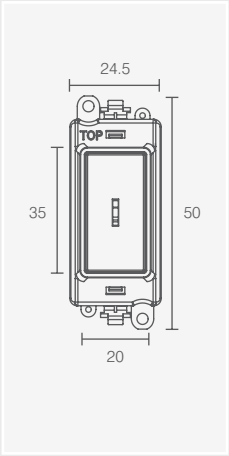

TYPICAL WIRING DIAGRAM

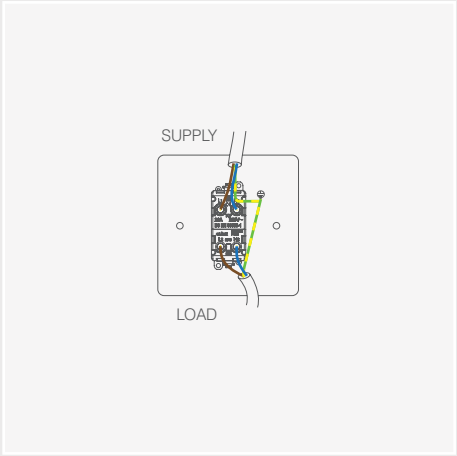

Material Composition	Rocker Switch: Urea or Urea + Stainless Steel Cover (Ingot) Cover, Insert & Rear Housing: Nylon Terminals: Brass, Terminal Screws: Steel & Yellow Passivated Silver "on-lay" Copper / Brass Contacts
Voltage	250V~ 50Hz
Current Rating	20AX
Terminal Size	5mm ø
Torque Value	1.2Nm
Cable Size	2 x 4mm², 3 x 2.5mm² or 1 x 6mm²
Back Box Depth	25mm - 47mm (Deco*, Deco Plus®, Mode*, Polar*) 35mm - 47mm (Define*, Definity*)
Double Pole	Yes
Modular	Yes
Warranty	10 Years
Antimicrobial Certified	Yes (Non Ingot Switches Only)
IP Rating	IP20
Operational Temperature	-5°C to +40°C
Standards	BS EN 60669-1:1999 + A1:2002 + A2:2008

Additional Information:

Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product. These products are rated at 20AX; therefore all terminals should not exceed the stated amperage.
Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.
All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products were independently tested and achieved a 99.9% kill rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, and Klebsiella Pneumoniae.



GM2047PWCH



GM2047PWBR



GM2047PWSC



GM2047PWBS



GM2047BKBN



GM2047BKAB



GM2047BKSS




MODULE BACK

13A Fused Modules


GM2047PW	13A Fused Module - White
GM2047BK	13A Fused Module - Black
GM2047PWBR	13A Fused Module - White - Polished Brass
GM2047PWBS	13A Fused Module - White - Brushed Stainless
GM2047PWCH	13A Fused Module - White - Polished Chrome
GM2047PWPN	13A Fused Module - White - Pearl Nickel
GM2047PWSB	13A Fused Module - White - Satin Brass
GM2047PWSC	13A Fused Module - White - Satin Chrome
GM2047PWSS	13A Fused Module - White - Stainless Steel
GM2047BKAB	13A Fused Module - Black - Antique Brass
GM2047BKBN	13A Fused Module - Black - Black Nickel
GM2047BKBR	13A Fused Module - Black - Polished Brass
GM2047BKBS	13A Fused Module - Black - Brushed Stainless
GM2047BKCH	13A Fused Module - Black - Polished Chrome
GM2047BKPN	13A Fused Module - Black - Pearl Nickel
GM2047BKSB	13A Fused Module - Black - Satin Brass
GM2047BKSC	13A Fused Module - Black - Satin Chrome
GM2047BKSS	13A Fused Module - Black - Stainless Steel

Standards: Fused Module: BS 1363-4: 1995
Back Box Depth: 25mm Minimum **Cable Size:** 2 x 4mm, 3 x 2.5mm, 1 x 6mm

DIMENSIONS (mm)

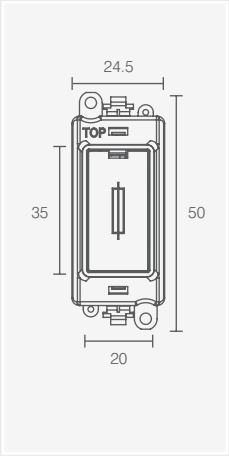

TYPICAL WIRING DIAGRAM

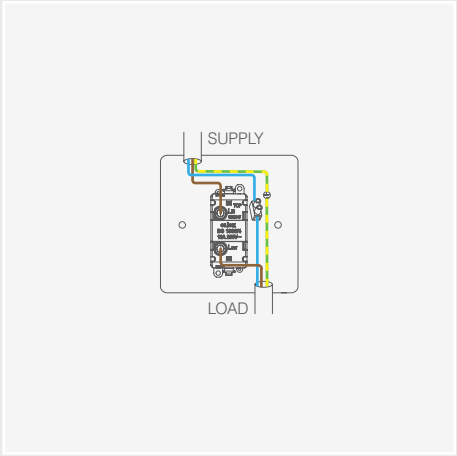

Material Composition	Module Front: Urea or Urea + Stainless Steel Cover (Ingot) Cover, Insert & Rear Housing: Nylon Terminals: Brass, Terminal Screws: Steel & Yellow Passivated
Voltage	250V~ 50Hz
Current Rating	13A
Terminal Size	5mm ø
Torque Value	1.2Nm
Cable Size	2 x 4mm², 3 x 2.5mm² or 1 x 6mm²
Back Box Depth	25mm - 47mm (Deco®, Deco Plus®, Mode®, Polar™) 35mm - 47mm (Define®, Definity™)
Lockable	No
Modular	Yes
Warranty	10 Years
Antimicrobial Certified	Yes (Non Ingot Modules Only)
IP Rating	IP20
Operational Temperature	-5°C to +40°C
Standards	BS 1363-4: 1995

Additional Information:
Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product.
These products are rated at 13A; therefore all terminals should not exceed the stated amperage.
Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.
All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products were independently tested and achieved a 99.9% kill rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, and Klebsiella Pneumoniae.



GM2047-LPW



GM2047-LPWPN



GM2047-LPWSB



GM2047-LPWSS



GM2047-LBK



GM2047-LBKBR



GM2047-LBKBS




MODULE BACK

13A Lockable Fused Modules


GM2047-LPW	13A Fused Lockable Module - White
GM2047-LBK	13A Fused Lockable Module - Black
GM2047-LPWBR	13A Fused Lockable Module - White - Polished Brass
GM2047-LPWBS	13A Fused Lockable Module - White - Brushed Stainless
GM2047-LPWCH	13A Fused Lockable Module - White - Polished Chrome
GM2047-LPWPN	13A Fused Lockable Module - White - Pearl Nickel
GM2047-LPWSB	13A Fused Lockable Module - White - Satin Brass
GM2047-LPWSC	13A Fused Lockable Module - White - Satin Chrome
GM2047-LPWSS	13A Fused Lockable Module - White - Stainless Steel
GM2047-LBKAB	13A Fused Lockable Module - Black - Antique Brass
GM2047-LBKBN	13A Fused Lockable Module - Black - Black Nickel
GM2047-LBKBR	13A Fused Lockable Module - Black - Polished Brass
GM2047-LBKBS	13A Fused Lockable Module - Black - Brushed Stainless
GM2047-LBKCH	13A Fused Lockable Module - Black - Polished Chrome
GM2047-LBKPN	13A Fused Lockable Module - Black - Pearl Nickel
GM2047-LBKSB	13A Fused Lockable Module - Black - Satin Brass
GM2047-LBKSC	13A Fused Lockable Module - Black - Satin Chrome
GM2047-LBKSS	13A Fused Lockable Module - Black - Stainless Steel

Standards: Fused Module: BS 1363-4: 1995
Back Box Depth: 25mm Minimum **Cable Size:** 2 x 4mm, 3 x 2.5mm, 1 x 6mm

DIMENSIONS (mm)

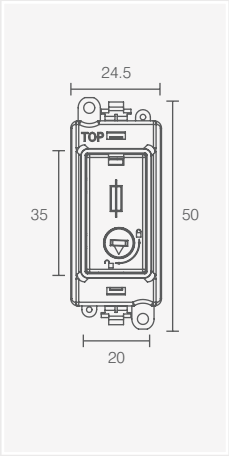

TYPICAL WIRING DIAGRAM

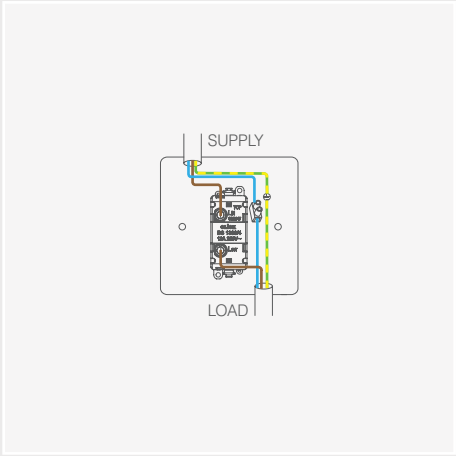

Material Composition	Module Front: Urea or Urea + Stainless Steel Cover (Ingot) Cover, Insert & Rear Housing: Nylon Terminals: Brass, Terminal Screws: Steel & Yellow Passivated
Voltage	250V~ 50Hz
Current Rating	13A
Terminal Size	5mm ø
Torque Value	1.2Nm
Cable Size	2 x 4mm², 3 x 2.5mm² or 1 x 6mm²
Back Box Depth	25mm - 47mm (Deco®, Deco Plus®, Mode®, Polar™) 35mm - 47mm (Define®, Definity™)
Lockable	GM2047-L Only
Modular	Yes
Warranty	10 Years
Antimicrobial Certified	Yes (Non Ingot Modules Only)
IP Rating	IP20
Operational Temperature	-5°C to +40°C
Standards	BS 1363-4: 1995

Additional Information:
Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product.
These products are rated at 13A; therefore all terminals should not exceed the stated amperage.
Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.
All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products were independently tested and achieved a 99.9% kill rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, and Klebsiella Pneumoniae.



GM2017PW



GM2017PWPN



GM2017PWSB



GM2017PWSS



GM2017BK



GM2017BKCH



GM2017BKSC




MODULE BACK

20A Flex Outlet Modules


GM2017PW	20A Flex Outlet Module - White
GM2017BK	20A Flex Outlet Module - Black
GM2017PWBR	20A Flex Outlet Module - White - Polished Brass
GM2017PWBS	20A Flex Outlet Module - White - Brushed Stainless
GM2017PWCH	20A Flex Outlet Module - White - Polished Chrome
GM2017PWPN	20A Flex Outlet Module - White - Pearl Nickel
GM2017PWSB	20A Flex Outlet Module - White - Satin Brass
GM2017PWSC	20A Flex Outlet Module - White - Satin Chrome
GM2017PWSS	20A Flex Outlet Module - White - Stainless Steel
GM2017BKAB	20A Flex Outlet Module - Black - Antique Brass
GM2017BKBN	20A Flex Outlet Module - Black - Black Nickel
GM2017BKBR	20A Flex Outlet Module - Black - Polished Brass
GM2017BKBS	20A Flex Outlet Module - Black - Brushed Stainless
GM2017BKCH	20A Flex Outlet Module - Black - Polished Chrome
GM2017BKPN	20A Flex Outlet Module - Black - Pearl Nickel
GM2017BKSB	20A Flex Outlet Module - Black - Satin Brass
GM2017BKSC	20A Flex Outlet Module - Black - Satin Chrome
GM2017BKSS	20A Flex Outlet Module - Black - Stainless Steel

Standards: Flex Outlet Module: BS5733
Back Box Depth: 25mm Minimum **Cable Size:** 2 x 4mm, 3 x 2.5mm, 1 x 6mm

DIMENSIONS (mm)

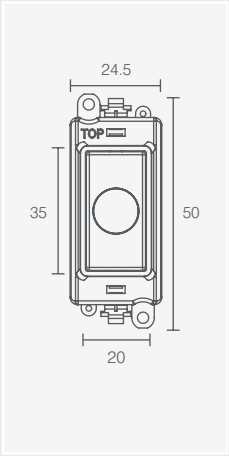

TYPICAL WIRING DIAGRAM

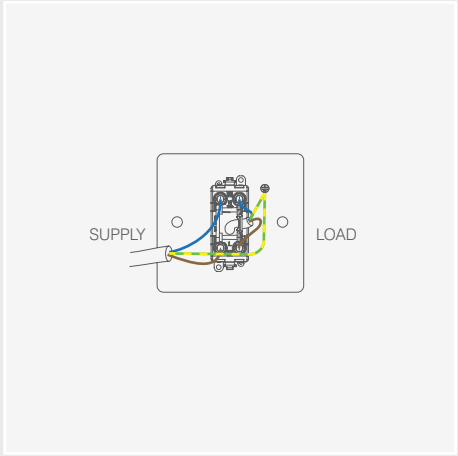

Material Composition	Module Front: Urea or Urea + Stainless Steel Cover (Ingot) Cover, Insert & Rear Housing: Nylon Terminals: Brass Terminal Screws: Steel & Yellow Passivated
Voltage	250V~ 50Hz
Current Rating	20A
Terminal Size	5mm ø
Torque Value	1.2Nm
Cable Size	2 x 4mm², 3 x 2.5mm² or 1 x 6mm²
Back Box Depth	25mm - 47mm (Deco®, Deco Plus®, Mode®, Polar®) 35mm - 47mm (Define®, Definity®)
Modular	Yes
Warranty	10 Years
Antimicrobial Certified	Yes (Non Ingot Modules Only)
IP Rating	IP20
Operational Temperature	-5°C to +40°C
Standards	BS 5733: 2010

Additional Information:

Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product.
These products are rated at 20A; therefore all terminals should not exceed the stated amperage.
Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.
All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products were independently tested and achieved a 99.9% kill rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, and Klebsiella Pneumoniae.



GM2008PWCH



GM2008PWBR



GM2008PWSC



GM2008PWBS



GM2008BKBN



GM2008BKPN



GM2008BKSB




MODULE BACK

Blank Modules

GM2008PW	Blank Module - White
GM2008BK	Blank Module - Black
GM2008PWBR	Blank Module - White - Polished Brass
GM2008PWBS	Blank Module - White - Brushed Stainless
GM2008PWCH	Blank Module - White - Polished Chrome
GM2008PWPN	Blank Module - White - Pearl Nickel
GM2008PWSB	Blank Module - White - Satin Brass
GM2008PWSC	Blank Module - White - Satin Chrome
GM2008PWSS	Blank Module - White - Stainless Steel
GM2008BKAB	Blank Module - Black - Antique Brass
GM2008BKBN	Blank Module - Black - Black Nickel
GM2008BKBR	Blank Module - Black - Polished Brass
GM2008BKBS	Blank Module - Black - Brushed Stainless
GM2008BKCH	Blank Module - Black - Polished Chrome
GM2008BKPN	Blank Module - Black - Pearl Nickel
GM2008BKSB	Blank Module - Black - Satin Brass
GM2008BKSC	Blank Module - Black - Satin Chrome
GM2008BKSS	Blank Module - Black - Stainless Steel

Back Box Depth: 25mm Minimum

DIMENSIONS (mm)

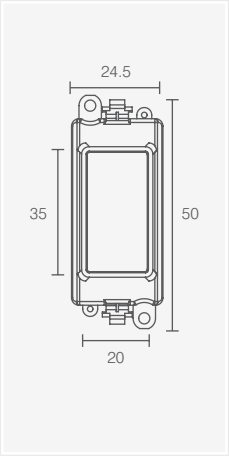

Material Composition	Module Front: Nylon or Nylon + Stainless Steel Cover (Ingot) Cover, Insert & Rear Housing: Nylon
Back Box Depth	25mm - 47mm (Deco®, Deco Plus®, Mode®, Polar®) 35mm - 47mm (Define®, Definity®)
Modular	Yes
Warranty	10 Years
Antimicrobial Certified	No
IP Rating	IP20
Operational Temperature	-5°C to +40°C
Standards	BS 5733:2010 (where applicable)

Additional Information:
Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product. Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.



GM2080PW



GM2081PW



GM2082PW



GM2080BK



GM2081BK



GM2082BK




MODULE BACK

Indicator Modules


GM2080BK	240V~ Red Indicator Module - Black
GM2080PW	240V~ Red Indicator Module - White
GM2081BK	240V~ Amber Indicator Module - Black
GM2081PW	240V~ Amber Indicator Module - White
GM2082BK	240V~ Green Indicator Module - Black
GM2082PW	240V~ Green Indicator Module - White

Standards: Indicator Module: BS5733
Back Box Depth: 25mm Minimum **Cable Size:** 2 x 4mm, 3 x 2.5mm, 1 x 6mm

DIMENSIONS (mm)
GM2080/ GM2081/ GM2082



TYPICAL WIRING DIAGRAM



Material Composition	Indicator Lens: Polycarbonate / ABS Cover, Insert & Rear Housing: Nylon Terminals: Brass, Terminal Screws: Steel & Yellow Passivated
Voltage	250V~ 50Hz
Terminal Size	5mm ø
Torque Value	1.2Nm
Cable Size	2 x 4mm^2, 3 x 2.5mm^2 or 1 x 6mm^2
Back Box Depth	25mm - 47mm (Deco®, Deco Plus®, Mode®, Polar®) 35mm - 47mm (Define®, Definity®)
Modular	Yes
Warranty	10 Years
IP Rating	IP20
Operational Temperature	-5°C to +40°C
Standards	BS 5733: 2010

Additional Information:
Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product. Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.


GM2008GTAB


GM2008RTBS


GM2008GTPW


MODULE BACK

IN HOUSE LASER ETCHING
Our in house laser printer provides flexibility to suit large volume batch or custom jobs.
The precision, permanent, fine marking effect is customisable, offering you and your customers a wider variety of options.

Ideal for Hotel locations
See the range of compatible Hotel Accessory Plates in the GridPro® range of frontplates.

Green Blank Illuminated Modules


GM2008GTBK	250V~ Green Transparent Illuminated Blank Module - Black
GM2008GTPW	250V~ Green Transparent Illuminated Blank Module - White
GM2008GTAB	250V~ Green Transparent Illuminated Blank Module - Antique Brass
GM2008GTBN	250V~ Green Transparent Illuminated Blank Module - Black Nickel
GM2008GTBR	250V~ Green Transparent Illuminated Blank Module - Polished Brass
GM2008GTBS	250V~ Green Transparent Illuminated Blank Module - Brushed Steel
GM2008GTCH	250V~ Green Transparent Illuminated Blank Module - Polished Chrome
GM2008GTPN	250V~ Green Transparent Illuminated Blank Module - Pearl Nickel
GM2008GTSB	250V~ Green Transparent Illuminated Blank Module - Satin Brass
GM2008GTSC	250V~ Green Transparent Illuminated Blank Module - Satin Chrome
GM2008GTSS	250V~ Green Transparent Illuminated Blank Module - Stainless Steel

Red Blank Illuminated Modules


GM2008RTBK	250V~ Red Transparent Illuminated Blank Module - Black
GM2008RTPW	250V~ Red Transparent Illuminated Blank Module - White
GM2008RTAB	250V~ Red Transparent Illuminated Blank Module - Antique Brass
GM2008RTBN	250V~ Red Transparent Illuminated Blank Module - Black Nickel
GM2008RTBR	250V~ Red Transparent Illuminated Blank Module - Polished Brass
GM2008RTBS	250V~ Red Transparent Illuminated Blank Module - Brushed Steel
GM2008RTCH	250V~ Red Transparent Illuminated Blank Module - Polished Chrome
GM2008RTPN	250V~ Red Transparent Illuminated Blank Module - Pearl Nickel
GM2008RTSB	250V~ Red Transparent Illuminated Blank Module - Satin Brass
GM2008RTSC	250V~ Red Transparent Illuminated Blank Module - Satin Chrome
GM2008RTSS	250V~ Red Transparent Illuminated Blank Module - Stainless Steel

Standards: Indicator Module: BS5733
Back Box Depth: 25mm Minimum **Cable Size:** 2 x 4mm, 3 x 2.5mm, 1 x 6mm

GM2008

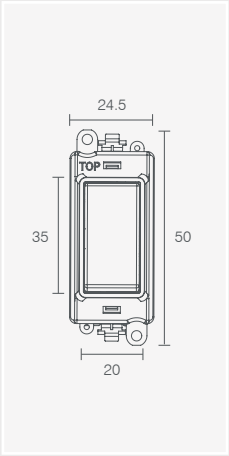

TYPICAL WIRING DIAGRAM

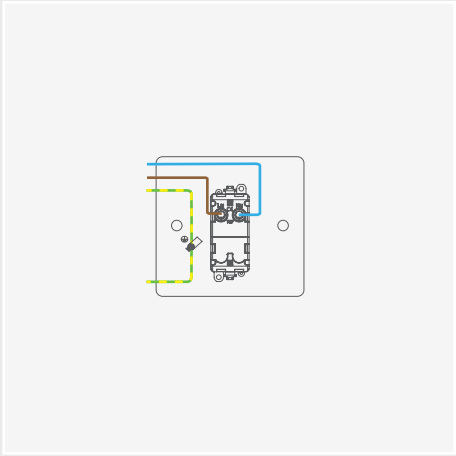

Material Composition	Transparent Trim: Polycarbonate Blank Section: Decorative (Stainless Steel), Moulded (Polycarbonate) Rear Housing: Nylon Terminals: Brass Terminal Screws: Steel & Yellow Passivated
Voltage	250V~ 50Hz
Terminal Size	5mm ø
Torque Value	1.2Nm
Cable Size	2 x 4mm^2, 3 x 2.5mm^2 or 1 x 6mm^2
Back Box Depth	25mm - 47mm (Deco™, Deco Plus, Mode™, Polar™) 35mm - 47mm (Define™, Definity™)
Modular	Yes
Warranty	10 Years
Anti Microbial Certified	Yes (Non Ingot Switches Only)
IP Rating	IP20
Operational Temperature	+5°C to +40°C
Standards	BS 5733: 2010


Additional Information:
Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product. Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.


GM2001BTBK


GM2002BTPW


GM20018BTBK

GM2001/ GM2002 / GM2018




MODULE BACK


MODULE BACK


MODULE BACK

20AX Locator Switch Modules


GM2001BTBK	20AX 1 Way Locator Black Switch Module With Blue Transparent Surround
GM2001BTPW	20AX 1 Way Locator White Switch Module With Blue Transparent Surround
GM2002BTBK	20AX 2 Way Locator Black Switch Module With Blue Transparent Surround
GM2002BTPW	20AX 2 Way Locator White Switch Module With Blue Transparent Surround

20AX Switch Module


GM2018BTBK	20AX Double Pole Black Switch Module With Blue Transparent Surround
GM2018BTPW	20AX Double Pole White Switch Module With Blue Transparent Surround

Standards: Switch Modules: BS EN 60669-1
Back Box Depth: 25mm Minimum **Cable Size:** 2 x 4mm, 3 x 2.5mm, 1 x 6mm


TYPICAL 1 WAY SWITCHED CIRCUIT

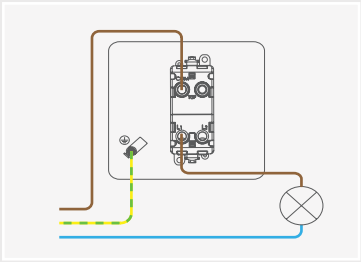

TYPICAL DOUBLE POLE WIRING DIAGRAM

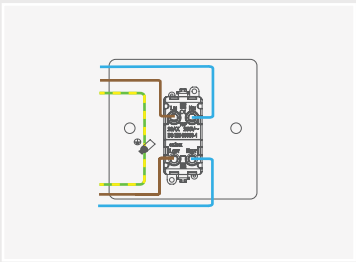

TYPICAL 2 WAY SWITCHED CIRCUIT

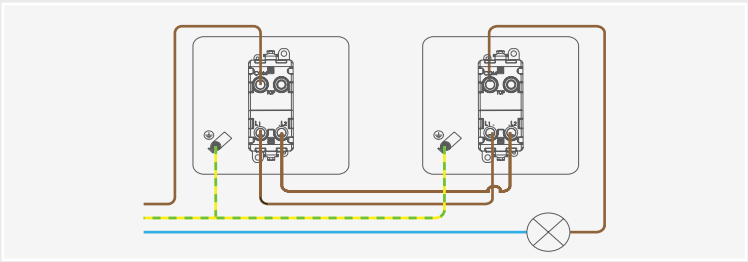

Material Composition	Transparent Trim: Polycarbonate Switch: Urea Rear Housing: Nylon Terminals: Brass Terminal Screws: Steel & Yellow Passivated Contacts: Silver "on-lay" Copper / Brass
Voltage	250V~ 50Hz
Current Rating	20AX (suitable for inductive loads)
Terminal Size	5mm ø
Torque Value	1.2Nm
Cable Size	2 x 4mm², 3 x 2.5mm² or 1 x 6mm²
Back Box Depth	25mm - 47mm (Deco™, Deco Plus, Mode™, Polar™) 35mm - 47mm (Define®, Definity™)
Modular	Yes
Warranty	10 Years
Anti Microbial Certified	Yes (Non Ingot Switches Only)
IP Rating	IP20
Operational Temperature	+5°C to +40°C
Standards	BS EN 60669-1: 1999 + A1: 2002 +A2: 2008

Additional Information:

Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product. These products are rated at 20AX; therefore all terminals should not exceed the stated amperage.
Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.
All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products were independently tested and achieved a 99.9% kill rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, and Klebsiella Pneumoniae.


GM2650PW


GM2600BK


GM2300BK



MODULE BACK
GM2650PW


MODULE BACK
GM2600BK

Buzzer Module

GM2650BK	230V~ Buzzer Unit Module - Black
GM2650PW	230V~ Buzzer Unit Module - White

Time Delay Switch Modules


GM2600BK	230V~ Time Delay Switch 300W - Black
GM2600PW	230V~ Time Delay Switch 300W - White
	Time Settings: 10 minutes or 30 minutes

USB Connection Modules

GM2300BK	USB Throughput Module - Black
GM2300PW	USB Throughput Module - White
	Flylead: 95mm overall length

Standards: BS5733
Back Box Depth: 16mm Minimum **Cable Size:** 1 X 1.5mm² **Warranty:** 1 Year
Dimensions: **GM2650:** 24.5mm x 50mm x 31.5mm **GM2600:** 24.5mm x 50mm x 25mm

GM2600/2650/2300



	GM2600	GM2650	GM2300
Material Composition	Rocker Switch: Urea or Urea + Stainless Steel Cover (Ingot) Cover, Insert & Rear Housing: Nylon Terminals: Brass Terminal Screws: Steel & Yellow Passivated Silver "on-lay" Copper / Brass Contacts		
Voltage	240V	200-250V	30V DC MAX
Current Rating	20AX (suitable for inductive loads)		
Terminal Size	5mm ø		
Torque Value	1.2Nm		
Cable Size	1 x 1.5mm^2		
Back Box Depth	25mm - 47mm (Deco™, Deco Plus, Mode™, Polar™) 35mm - 47mm (Define™, Definity™)		
Modular	Yes		
Warranty	10 Years		
Anti Microbial Certified	Yes (Non Ingot Switches Only)		
IP Rating	IP20		
Operational Temperature	-5°C to +40°C		
Standards	The Low Voltage Directive 2014/35/EU BS EN 60669-1:1999 + A1:2002 + A2:2008		

Additional Information:

Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product. These products are rated at 20AX; therefore all terminals should not exceed the stated amperage.
Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.
All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products were independently tested and achieved a 99.9% kill rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, and Klebsiella Pneumoniae.


GM2490PW


GM2495PW


GM2497PW


GM2496BK


GM2490PW
MODULE BACK


GM2495PW
MODULE BACK



GM2497PW
MODULE BACK

Media Modules

GM2490BK	RCA X 2 Outlet Module - Black
GM2490PW	RCA X 2 Outlet Module - White
GM2495BK	Loudspeaker X 2 Outlet Module - Black
GM2495PW	Loudspeaker X 2 Outlet Module - White
GM2496BK	3.5mm Audio Jack Module - Black
GM2496PW	3.5mm Audio Jack Module - White
	Flylead: 98mm overall length
GM2497BK	HIFI Module- Black
GM2497PW	HIFI Module - White

Standards: Switch Modules: BS EN 60669-1 **Fuse Module**: BS1363/4 **Indicator Module**: BS5733 **Flex Outlet Module**: BS5733
Back Box Depth: 16mm Minimum **Cable Size:** Dependant on module used **Warranty:** 1 Year
Dimensions: GM2490: 24.5mm x 50mm x 15mm **GM2495:** 24.5mm x 50mm x 13.5mm **GM2496:** 24.5mm x 50mm x 35mm
GM2497: 24.5mm x 50mm x 19.5mm

GM2001



Material Composition	Rocker Switch: Urea or Urea + Stainless Steel Cover (Ingot) Cover, Insert & Rear Housing: Nylon Terminals: Brass Terminal Screws: Steel & Yellow Passivated Silver "on-lay" Copper / Brass Contacts
Voltage	250V~ 50Hz
Current Rating	20AX (suitable for inductive loads)
Terminal Size	5mm ø
Torque Value	1.2Nm
Cable Size	2 x 4mm², 3 x 2.5mm² or 1 x 6mm²
Back Box Depth	25mm - 47mm (Deco™, Deco Plus, Mode™, Polar™) 35mm - 47mm (Define®, Definity™)
Modular	Yes
Warranty	10 Years
Anti Microbial Certified	Yes (Non Ingot Switches Only)
IP Rating	IP20
Operational Temperature	-5°C to +40°C
Standards	The Low Voltage Directive 2014/35/EU BS EN 60669-1:1999 + A1:2002 + A2:2008

Additional Information:

Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product. These products are rated at 20AX; therefore all terminals should not exceed the stated amperage.
Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.
All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products were independently tested and achieved a 99.9% kill rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, and Klebsiella Pneumoniae.



GM2460PW



GM2465PW



GM2470PW



GM2485PW



GM2460PW



GM2465PW



GM2470PW




GM2485PW MODULE BACK

Telephone/Data Modules

GM2460BK	Telephone Socket Module (Master) - Black
GM2460PW	Telephone Socket Module (Master) - White
GM2465BK	Telephone Socket Module (Secondary) - Black
GM2465PW	Telephone Socket Module (Secondary) - White
GM2470BK	RJ11 Module - Black
GM2470PW	RJ11 Module -White
GM2485BK	RJ45 Cat-6 Module - Black
GM2485PW	RJ45 Cat-6 Module - White

Standards: Switch Modules: BS EN 60669-1 **Fuse Module**: BS1363/4 **Indicator Module**: BS5733 **Flex Outlet Module**: BS5733
Back Box Depth: 16mm Minimum **Cable Size:** Dependant on module used **Warranty:** 1 Year
Dimensions: GM2460: 24.5mm x 50mm x 18mm **GM2465:** 24.5mm x 50mm x 18mm **GM2470:** 24.5mm x 50mm x 16mm
GM2485: 24.5mm x 50mm x 17.5mm

GM2460/ GM2465/ GM2470 / GM2485

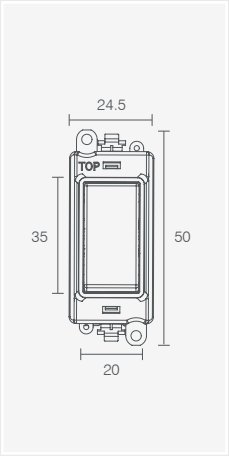

Material Composition	Rocker Switch: Urea or Urea + Stainless Steel Cover (Ingot) Cover, Insert & Rear Housing: Nylon Terminals: Brass Terminal Screws: Steel & Yellow Passivated Silver "on-lay" Copper / Brass Contacts
Voltage	250V~ 50Hz
Current Rating	20AX (suitable for inductive loads)
Terminal Size	5mm ø
Torque Value	1.2Nm
Cable Size	2 x 4mm², 3 x 2.5mm² or 1 x 6mm²
Back Box Depth	25mm - 47mm (Deco™, Deco Plus, Mode™, Polar™) 35mm - 47mm (Define®, Definity™)
Modular	Yes
Warranty	10 Years
Anti Microbial Certified	Yes (Non Ingot Switches Only)
IP Rating	IP20
Operational Temperature	-5°C to +40°C
Standards	The Low Voltage Directive 2014/35/EU BS EN 60669-1:1999 + A1:2002 + A2:2008

Additional Information:

Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product. These products are rated at 20AX; therefore all terminals should not exceed the stated amperage.
Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.
All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products were independently tested and achieved a 99.9% kill rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, and Klebsiella Pneumoniae.



GM2405PW



GM2410BK



GM2415PW



GM2405PW
MODULE BACK



GM2410PW / GM2415PW
MODULE BACK



GM2305BK




GM2501PW

TV/Satellite Modules

GM2305BK	VGA Module - Black
GM2305PW	VGA Module - White Flylead: 160mm overall length
GM2405BK	Satellite Module - Black
GM2405PW	Satellite Module - White
GM2410BK	Non-Isolated Female Coaxial Module - Black
GM2410PW	Non-Isolated Female Coaxial Module - White
GM2415BK	Non-Isolated Male Coaxial Module - Black
GM2415PW	Non-Isolated Male Coaxial Module - White
GM2501BK	HDMI Module (V2.0) - Black
GM2501PW	HDMI Module (V2.0) - White Flylead: 145mm overall length

Standards: Switch Modules: BS EN 60669-1 **Fuse Module**: BS1363/4 **Indicator Module**: BS5733 **Flex Outlet Module**: BS5733
Back Box Depth: 16mm Minimum **Cable Size:** Dependant on module used **Warranty:** 1 Year
Dimensions: GM2305: 24.5mm x 50mm x 43mm **GM2405:** 24.5mm x 50mm x 20mm **GM2410:** 24.5mm x 50mm x 20mm
GM2415: 24.5mm x 50mm x 20mm **GM2501:** 24.5mm x 50mm x 45mm

GM2305/ GM2405/ GM2410/ GM2501

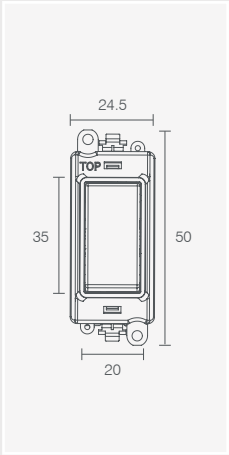

Material Composition	Rocker Switch: Urea or Urea + Stainless Steel Cover (Ingot) Cover, Insert & Rear Housing: Nylon Terminals: Brass Terminal Screws: Steel & Yellow Passivated Silver "on-lay" Copper / Brass Contacts
Voltage	250V~ 50Hz
Current Rating	20AX (suitable for inductive loads)
Terminal Size	5mm ø
Torque Value	1.2Nm
Cable Size	2 x 4mm², 3 x 2.5mm² or 1 x 6mm²
Back Box Depth	25mm - 47mm (Deco™, Deco Plus, Mode™, Polar™) 35mm - 47mm (Define®, Definity™)
Modular	Yes
Warranty	10 Years
Anti Microbial Certified	Yes (Non Ingot Switches Only)
IP Rating	IP20
Operational Temperature	-5°C to +40°C
Standards	The Low Voltage Directive 2014/35/EU BS EN 60669-1:1999 + A1:2002 + A2:2008

Additional Information:

Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product. These products are rated at 20AX; therefore all terminals should not exceed the stated amperage.
Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.
All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products were independently tested and achieved a 99.9% kill rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, and Klebsiella Pneumoniae.



GM050PW



GM050PWSB



MADE UP MODULE



GM050BK



GM050BKBS



MODULE BACK


Dimmer mounting kits include the mounting modules, locking nut, locking tool and knob.
For Dimmer Modules see page i82.

1 Module Dimmer Mounting Kit

GM050PW	1 Module Dimmer Mounting Kit - White
GM050BK	1 Module Dimmer Mounting Kit - Black
GM050PWBR	1 Module Dimmer Mounting Kit - White - Polished Brass
GM050PWBS	1 Module Dimmer Mounting Kit - White - Brushed Stainless
GM050PWCH	1 Module Dimmer Mounting Kit - White - Polished Chrome
GM050PWPN	1 Module Dimmer Mounting Kit - White - Pearl Nickel
GM050PWSB	1 Module Dimmer Mounting Kit - White - Satin Brass
GM050PWSC	1 Module Dimmer Mounting Kit - White - Satin Chrome
GM050PWSS	1 Module Dimmer Mounting Kit - White - Stainless Steel
GM050BKAB	1 Module Dimmer Mounting Kit - Black - Antique Brass
GM050BKBN	1 Module Dimmer Mounting Kit - Black - Black Nickel
GM050BKBR	1 Module Dimmer Mounting Kit - Black - Polished Brass
GM050BKBS	1 Module Dimmer Mounting Kit - Black - Brushed Stainless
GM050BKCH	1 Module Dimmer Mounting Kit - Black - Polished Chrome
GM050BKPN	1 Module Dimmer Mounting Kit - Black - Pearl Nickel
GM050BKSB	1 Module Dimmer Mounting Kit - Black - Satin Brass
GM050BKSC	1 Module Dimmer Mounting Kit - Black - Satin Chrome
GM050BKSS	1 Module Dimmer Mounting Kit - Black - Stainless Steel

Standards: Switch Modules: BS EN 60669-1
Back Box Depth: 47mm Minimum **Cable Size:** Dependant on Dimmer used

DIMENSIONS (mm)



INSTALLATION

The dimmer mounting modules attach to a dimmer module via the supplied locking nut, this is achieved with the locking tool. Then the knob simply pushes into place.



Material Composition	Mounting Kit: Nylon
Back Box Depth	47mm Minimum (Deco®, Deco Plus®, Mode®, Polar®, Define®, Definity®)
Modular	Yes
Warranty	10 Years
Antimicrobial Certified	No
IP Rating	IP20
Operational Temperature	-5°C to +40°C
Standards	BS 5733: 2010

Additional Information:
Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product. Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.



GM150PWCH



GM150PWBR



MADE UP MODULE



GM150BKBN



GM150BKAB



MODULE BACK


Dimmer mounting kits include the mounting modules, locking nut, locking tool and knob.
For Dimmer Modules see page i82.

2 Module Dimmer Mounting Kit

GM150PW	2 Module Dimmer Mounting Kit - White
GM150BK	2 Module Dimmer Mounting Kit - Black
GM150PWBR	2 Module Dimmer Mounting Kit - White - Polished Brass
GM150PWBS	2 Module Dimmer Mounting Kit - White - Brushed Stainless
GM150PWCH	2 Module Dimmer Mounting Kit - White - Polished Chrome
GM150PWPN	2 Module Dimmer Mounting Kit - White - Pearl Nickel
GM150PWSB	2 Module Dimmer Mounting Kit - White - Satin Brass
GM150PWSC	2 Module Dimmer Mounting Kit - White - Satin Chrome
GM150PWSS	2 Module Dimmer Mounting Kit - White - Stainless Steel
GM150BKAB	2 Module Dimmer Mounting Kit - Black - Antique Brass
GM150BKBN	2 Module Dimmer Mounting Kit - Black - Black Nickel
GM150BKBR	2 Module Dimmer Mounting Kit - Black - Polished Brass
GM150BKBS	2 Module Dimmer Mounting Kit - Black - Brushed Stainless
GM150BKCH	2 Module Dimmer Mounting Kit - Black - Polished Chrome
GM150BKPN	2 Module Dimmer Mounting Kit - Black - Pearl Nickel
GM150BKSB	2 Module Dimmer Mounting Kit - Black - Satin Brass
GM150BKSC	2 Module Dimmer Mounting Kit - Black - Satin Chrome
GM150BKSS	2 Module Dimmer Mounting Kit - Black - Stainless Steel

Standards: Switch Modules: BS EN 60669-1
Back Box Depth: 47mm Minimum **Cable Size:** Dependant on Dimmer used

DIMENSIONS (mm)

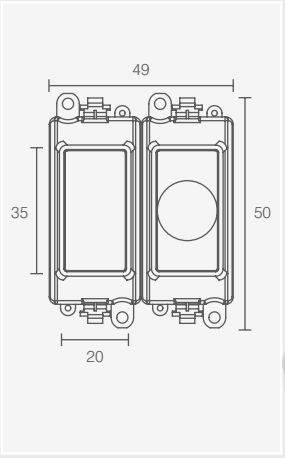

INSTALLATION

The dimmer mounting modules attach to a dimmer module via the supplied locking nut, this is achieved with the locking tool. Then the knob simply pushes into place.



Suitable for rotary dimmer modules where the spindle is off centre and overlaps the next module space.
Suitable for plates with 2, 4, 8, 12, 18 or 24 apertures.

Material Composition	Mounting Kit: Nylon
Back Box Depth	47mm Minimum (Deco®, Deco Plus®, Mode®, Polar®, Define®, Definity®)
Modular	Yes
Warranty	10 Years
Antimicrobial Certified	No
IP Rating	IP20
Operational Temperature	-5°C to +40°C
Standards	BS 5733: 2010

Additional Information:
Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product. Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.




GM9010



MD9014

For dimmer mounting kits
see pages i78 and i80.

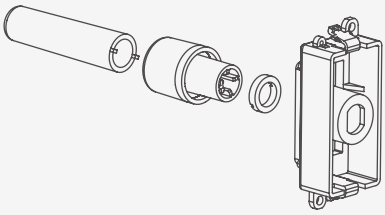

Dimmer Modules

GM9001	6A 2 Way Push On/Off (Non-Dimmable) Module
GM9010	1-10V Analogue Dimmer Module
GM9022	250W 2 Way Dimmer Module
GM9042	400W 2 Way Dimmer Module


The Click® dimming modules above are suitable for mounting next to each other using the appropriate mounting kit. Due to their physical size, they are not suitable to be mounted directly above each other.

Dimmer Modules

MD9014 100W Dual Mode Dimmer Module with Trim (26.5 x 55mm)

Due to the reduced height, the MD9014 is suitable for mounting directly above each other.

Standards: BS EN 60669, BS EN 55015
Back Box Depth: 25-47mm **Cable Size:** 2 x 1.5mm²
Dimmer Type: Leading Edge **MD9014:** Leading & Trailing Edge

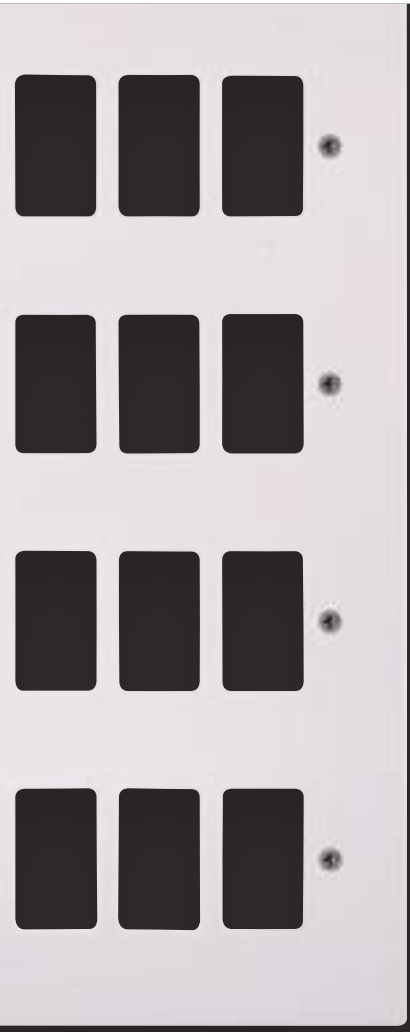

GridPro® Frontplates

The GridPro® frontplates illustrated on the following pages are all unfurnished for easy and quick configuration with the required modules.

The new 1 - 24 gang frontplates designed for GridPro® are available from each of the existing Click® wiring accessory ranges.

These new additions to each range seamlessly match the range they belong to, including standard fixing centres allowing uniform alignment. All existing range finishes and warranties apply to the new GridPro® frontplates.

In continuing the consistency of the range for the new GridPro® frontplates, we have ensured all Mode® and Polar™ products maintain the urea material to ensure consistent aesthetics and colour matching throughout the range as well as keeping the antimicrobial properties these ranges are known for.

define® definity™ MODE® deco PLUS+ polar™ essentials™ deco®



Deco Plus® GridPro® Frontplates

The Deco Plus® range is a premium decorative metal range of wiring accessories, this range is available in seven finishes to complement any room.



DPAB20401



DPBR20401



DPCH20401



DPSB20402



DPSC20402



DPSS20402

Accessory can be used with standard BS4662 Back Boxes.

deco PLUS

Deco Plus® 1 Gang GridPro® Frontplates

DPAB20401	1 Gang GridPro® Frontplate - Antique Brass
DPBN20401	1 Gang GridPro® Frontplate - Black Nickel
DPBR20401	1 Gang GridPro® Frontplate - Polished Brass
DPCH20401	1 Gang GridPro® Frontplate - Polished Chrome
DPSB20401	1 Gang GridPro® Frontplate - Satin Brass
DPSC20401	1 Gang GridPro® Frontplate - Satin Chrome
DPSS20401	1 Gang GridPro® Frontplate - Stainless Steel

Deco Plus® 2 Gang GridPro® Frontplates

DPAB20402	2 Gang GridPro® Frontplate - Antique Brass
DPBN20402	2 Gang GridPro® Frontplate - Black Nickel
DPBR20402	2 Gang GridPro® Frontplate - Polished Brass
DPCH20402	2 Gang GridPro® Frontplate - Polished Chrome
DPSB20402	2 Gang GridPro® Frontplate - Satin Brass
DPSC20402	2 Gang GridPro® Frontplate - Satin Chrome
DPSS20402	2 Gang GridPro® Frontplate - Stainless Steel


SCREW-IN MODULES

NO YOKE


STANDARD BACK BOX

Back Box Depth: Dependant on module used
Dimensions: 88mm x 88mm x 8mm

Understanding the code:
DP - Plate Style **BN** - Plate Finish **20401** - Product No.
AB Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome, **BN** Black Nickel, **SS** Stainless Steel.

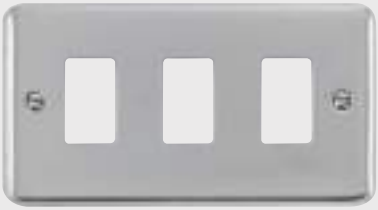


DPCH20403

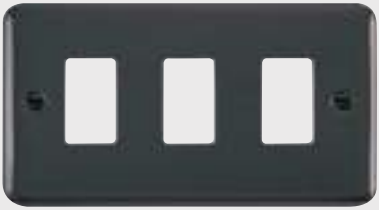

DPBN20403



DPSB20404

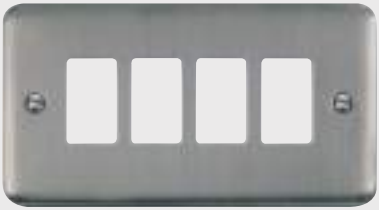

DPSS20404

deco PLUS

Accessory can be used with standard BS4662 Back Boxes.

Deco Plus® 3 Gang GridPro® Frontplates

DPAB20403	3 Gang GridPro® Frontplate - Antique Brass
DPBN20403	3 Gang GridPro® Frontplate - Black Nickel
DPBR20403	3 Gang GridPro® Frontplate - Polished Brass
DPCH20403	3 Gang GridPro® Frontplate - Polished Chrome
DPSB20403	3 Gang GridPro® Frontplate - Satin Brass
DPSC20403	3 Gang GridPro® Frontplate - Satin Chrome
DPSS20403	3 Gang GridPro® Frontplate - Stainless Steel

Deco Plus® 4 Gang GridPro® Frontplates

DPAB20404	4 Gang GridPro® Frontplate - Antique Brass
DPBN20404	4 Gang GridPro® Frontplate - Black Nickel
DPBR20404	4 Gang GridPro® Frontplate - Polished Brass
DPCH20404	4 Gang GridPro® Frontplate - Polished Chrome
DPSB20404	4 Gang GridPro® Frontplate - Satin Brass
DPSC20404	4 Gang GridPro® Frontplate - Satin Chrome
DPSS20404	4 Gang GridPro® Frontplate - Stainless Steel

SCREW-IN MODULES

NO YOKE


STANDARD BACK BOX

Back Box Depth: Dependant on module used
Dimensions: 148mm x 88mm x 8mm

Understanding the code:
DP - Plate Style **BN** - Plate Finish **20403** - Product No.
AB Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome, **BN** Black Nickel, **SS** Stainless Steel.



DPAB31102

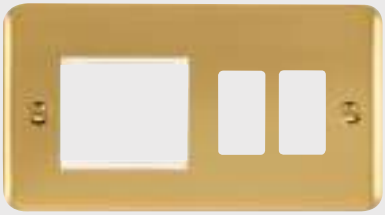

DPBR31102



DPCH31102



DPSS31102

Accessory can be used with standard BS4662 Back Boxes.

deco PLUS

Deco Plus® Hotel Accessory GridPro® Frontplates

DPAB31102	Hotel Accessory Plate - 2 Gang Gridpro® Frontplate With Twin New Media Aperture - Antique Brass
DPBN31102	Hotel Accessory Plate - 2 Gang Gridpro® Frontplate With Twin New Media Aperture - Black Nickel
DPBR31102	Hotel Accessory Plate - 2 Gang Gridpro® Frontplate With Twin New Media Aperture - Polished Brass
DPCH31102	Hotel Accessory Plate - 2 Gang Gridpro® Frontplate With Twin New Media Aperture - Polished Chrome
DPSB31102	Hotel Accessory Plate - 2 Gang Gridpro® Frontplate With Twin New Media Aperture - Satin Brass
DPSC31102	Hotel Accessory Plate - 2 Gang Gridpro® Frontplate With Twin New Media Aperture - Satin Chrome
DPSS31102	Hotel Accessory Plate - 2 Gang Gridpro® Frontplate With Twin New Media Aperture - Stainless Steel

SCREW-IN MODULES

NO YOKE

STANDARD BACK BOX

new media™


See our dedicated New Media™ section for more information on the range of New Media™ modules available.

Back Box Depth: Dependant on module used
Dimensions: 148mm x 88mm x 8mm

Understanding the code:
DP - Plate Style **BN** - Plate Finish **31102** - Product No.
AB Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome, **BN** Black Nickel, **SS** Stainless Steel.



DPCH20506

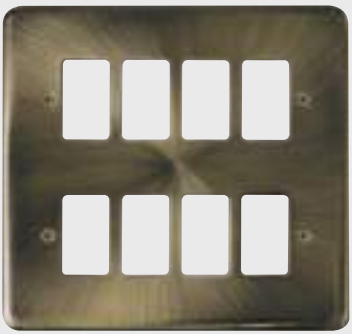

DPAB20508

deco PLUS

Compatible with Back Box WA512.
For more information on Back Boxes and Yokes see from page i137.

Deco Plus® 6 Gang GridPro® Frontplates

DPAB20506	6 Gang GridPro® Frontplate - Antique Brass
DPBN20506	6 Gang GridPro® Frontplate - Black Nickel
DPBR20506	6 Gang GridPro® Frontplate - Polished Brass
DPCH20506	6 Gang GridPro® Frontplate - Polished Chrome
DPSB20506	6 Gang GridPro® Frontplate - Satin Brass
DPSC20506	6 Gang GridPro® Frontplate - Satin Chrome
DPSS20506	6 Gang GridPro® Frontplate - Stainless Steel

Deco Plus® 8 Gang GridPro® Frontplates


DPAB20508	8 Gang GridPro® Frontplate - Antique Brass
DPBN20508	8 Gang GridPro® Frontplate - Black Nickel
DPBR20508	8 Gang GridPro® Frontplate - Polished Brass
DPCH20508	8 Gang GridPro® Frontplate - Polished Chrome
DPSB20508	8 Gang GridPro® Frontplate - Satin Brass
DPSC20508	8 Gang GridPro® Frontplate - Satin Chrome
DPSS20508	8 Gang GridPro® Frontplate - Stainless Steel

CLIP-ON MODULES


WITH TABS FITTING ON BACK BOX SURFACE

Back Box Depth: 47mm Minimum **Dimensions:** 148mm x 148mm x 8mm

Understanding the code:
DP - Plate Style **BN** - Plate Finish **20506** - Product No.
AB Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome, **BN** Black Nickel, **SS** Stainless Steel.

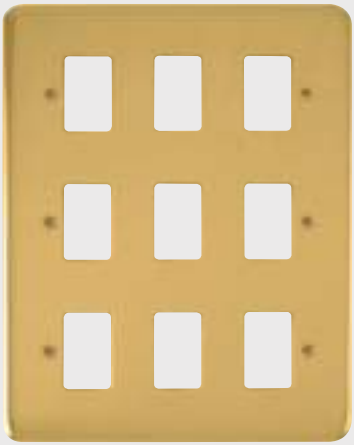

DPBR20509

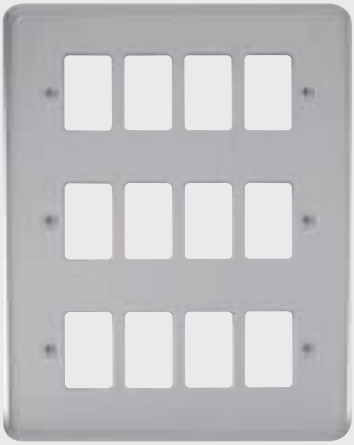

DPCH20512

Compatible with Back Box WA518.
For more information on Back Boxes and Yokes see from page i137.

deco PLUS

Deco Plus® 9 Gang GridPro® Frontplates

DPAB20509	9 Gang GridPro® Frontplate - Antique Brass
DPBN20509	9 Gang GridPro® Frontplate - Black Nickel
DPBR20509	9 Gang GridPro® Frontplate - Polished Brass
DPCH20509	9 Gang GridPro® Frontplate - Polished Chrome
DPSB20509	9 Gang GridPro® Frontplate - Satin Brass
DPSC20509	9 Gang GridPro® Frontplate - Satin Chrome
DPSS20509	9 Gang GridPro® Frontplate - Stainless Steel

CLIP-ON MODULES


Deco Plus® 12 Gang GridPro® Frontplates

DPAB20512	12 Gang GridPro® Frontplate - Antique Brass
DPBN20512	12 Gang GridPro® Frontplate - Black Nickel
DPBR20512	12 Gang GridPro® Frontplate - Polished Brass
DPCH20512	12 Gang GridPro® Frontplate - Polished Chrome
DPSB20512	12 Gang GridPro® Frontplate - Satin Brass
DPSC20512	12 Gang GridPro® Frontplate - Satin Chrome
DPSS20512	12 Gang GridPro® Frontplate - Stainless Steel

WITH TABS FITTING ON BACK BOX SURFACE

Back Box Depth: 47mm Minimum
Dimensions: 148mm x 207mm x 8mm

Understanding the code:
DP - Plate Style **BN** - Plate Finish **20509** - Product No.
AB Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome, **BN** Black Nickel, **SS** Stainless Steel.

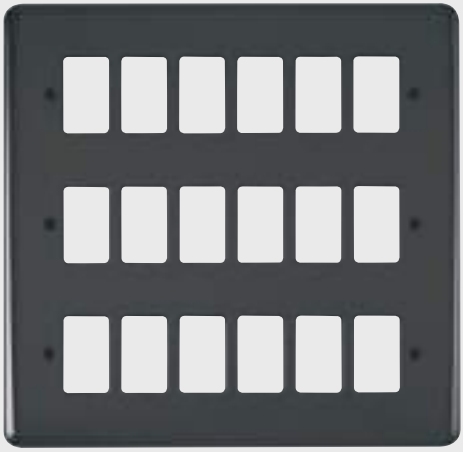

DPBN20518

Compatible with Back Box WA20518.
For more information on Back Boxes and Yokes see from page i137.

deco PLUS

Deco Plus® 18 Gang GridPro® Frontplates


DPAB20518	18 Gang GridPro® Frontplate - Antique Brass
DPBN20518	18 Gang GridPro® Frontplate - Black Nickel
DPBR20518	18 Gang GridPro® Frontplate - Polished Brass
DPCH20518	18 Gang GridPro® Frontplate - Polished Chrome
DPSB20518	18 Gang GridPro® Frontplate - Satin Brass
DPSC20518	18 Gang GridPro® Frontplate - Satin Chrome
DPSS20518	18 Gang GridPro® Frontplate - Stainless Steel

CLIP-ON MODULES

WITH TABS FITTING ON BACK BOX SURFACE

Back Box Depth: 56mm Minimum
Dimensions: 198mm x 207mm x 8mm

Understanding the code:
DP - Plate Style **BN** - Plate Finish **20518** - Product No.
AB Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome, **BN** Black Nickel, **SS** Stainless Steel.

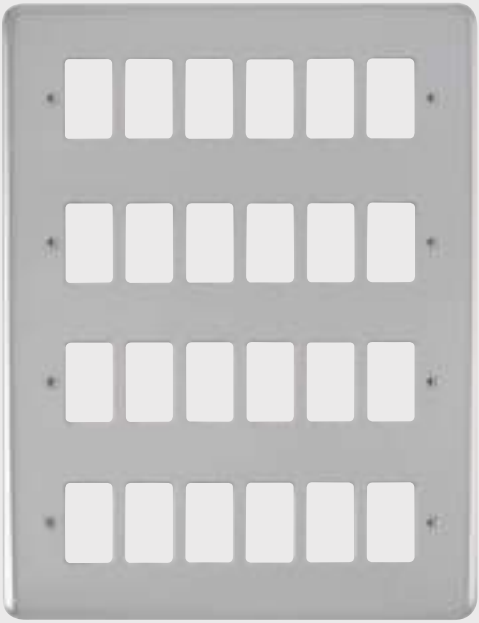

DPCH20524

deco PLUS

Compatible with Back Box WA20524.
For more information on Back Boxes and Yokes see from page i137.

Deco Plus® 24 Gang GridPro® Frontplates

DPAB20524	24 Gang GridPro® Frontplate - Antique Brass
DPBN20524	24 Gang GridPro® Frontplate - Black Nickel
DPBR20524	24 Gang GridPro® Frontplate - Polished Brass
DPCH20524	24 Gang GridPro® Frontplate - Polished Chrome
DPSB20524	24 Gang GridPro® Frontplate - Satin Brass
DPSC20524	24 Gang GridPro® Frontplate - Satin Chrome
DPSS20524	24 Gang GridPro® Frontplate - Stainless Steel

CLIP-ON MODULES

WITH TABS FITTING ON BACK BOX SURFACE

Back Box Depth: 56mm Minimum
Dimensions: 198mm x 270mm x 8mm

Understanding the code:
DP - Plate Style **BN** - Plate Finish **20518** - Product No.
AB Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome, **BN** Black Nickel, **SS** Stainless Steel.

Definity™ GridPro® Frontplates

The Screwless Range

Screwless, push-fit frontplates in 5 assorted finishes, the ultimate finishing touch.

The frontplates are supplied independently of the inserts which means that the initial installation of the product can be carried out and any subsequent decoration or maintenance completed before the final selection and fixing of the frontplate.








Definity™ Assembly

1. Fit and secure appropriate back box and insert, pull cable through insert and strip insulation accordingly.
   Ensure an earth connection between frame and insert (if required).



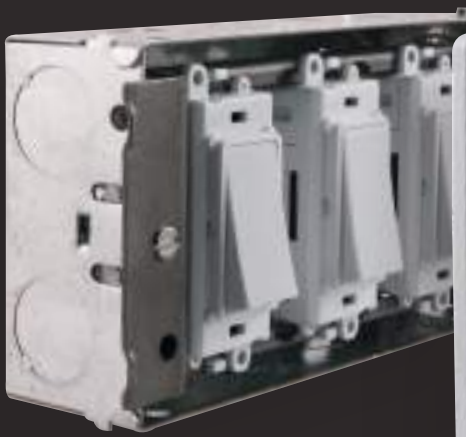



2. Systematically terminate cables into each module.
   Clip the modules into a designated Definity™ insert with a pivot motion.

GRIDPRO®

definity™

CLIP-ON
MODULES



3. Clip the Definity™ GridPro® frontplate directly to insert.



SCP20401CH



SCP20401BK

definity™

The Definity™ GridPro® frontplates on this page require the designated 1 and 2 module insert shown below.



SIN20200



SCP20402BS



SCP20402SS

definity™

Requires designated insert.
Accessory can be used with standard BS4662 Back Boxes.

Definity™ 1 Gang GridPro® Frontplates

SCP20401BK	1 Gang GridPro® Frontplate - Black
SCP20401BS	1 Gang GridPro® Frontplate - Brushed Stainless
SCP20401CH	1 Gang GridPro® Frontplate - Polished Chrome
SCP20401PW	1 Gang GridPro® Frontplate - White
SCP20401SS	1 Gang GridPro® Frontplate - Stainless Steel

Definity™ 2 Gang GridPro® Frontplates

SCP20402BK	2 Gang GridPro® Frontplate - Black
SCP20402BS	2 Gang GridPro® Frontplate - Brushed Stainless
SCP20402CH	2 Gang GridPro® Frontplate - Polished Chrome
SCP20402PW	2 Gang GridPro® Frontplate - White
SCP20402SS	2 Gang GridPro® Frontplate - Stainless Steel

Definity™ Module Insert

SIN20200	1 & 2 GridPro® Module Insert

CLIP-ON MODULES

NO YOKE


STANDARD BACK BOX

Back Box Depth: Dependant on module used
Dimensions: 86mm x 86mm x 4mm

Understanding the code:
SCP - Plate Style **20401** - Product No. **CH** - Plate Finish
CH Polished Chrome, **BS** Brushed Stainless, **SS** Stainless Steel, **BK** Matt Black, **PW** White.



SCP20403PW

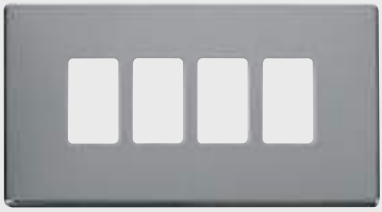

SCP20404CH

definity™

The Definity™ GridPro® frontplates on this page require the designated 3 and 4 module insert shown below.



SIN20400

Requires designated insert.
Accessory can be used with standard BS4662 Back Boxes.

definity™

Definity™ 3 Gang GridPro® Frontplates

SCP20403BK	3 Gang GridPro® Frontplate - Black
SCP20403BS	3 Gang GridPro® Frontplate - Brushed Stainless
SCP20403CH	3 Gang GridPro® Frontplate - Polished Chrome
SCP20403PW	3 Gang GridPro® Frontplate - White
SCP20403SS	3 Gang GridPro® Frontplate - Stainless Steel

Definity™ 4 Gang GridPro® Frontplates

SCP20404BK	4 Gang GridPro® Frontplate - Black
SCP20404BS	4 Gang GridPro® Frontplate - Brushed Stainless
SCP20404CH	4 Gang GridPro® Frontplate - Polished Chrome
SCP20404PW	4 Gang GridPro® Frontplate - White
SCP20404SS	4 Gang GridPro® Frontplate - Stainless Steel

Definity™ Module Insert

SIN20400	3 & 4 GridPro® Module Insert

CLIP-ON MODULES

NO YOKE

STANDARD BACK BOX

Back Box Depth: Dependant on module used
Dimensions: 146mm x 86mm x 4mm

Understanding the code:
SCP - Plate Style **20403** - Product No. **CH** - Plate Finish
CH Polished Chrome, **BS** Brushed Stainless, **SS** Stainless Steel, **BK** Matt Black, **PW** White.




SCP31102BS



SCP31102PW

definity™

The Definity™ GridPro® frontplates on this page require the designated Hotel Accessory module insert shown below.



SIN31102

Requires designated insert.
Accessory can be used with standard BS4662 Back Boxes.

definity™

Definity™ Hotel Accessory GridPro® Frontplates

SCP31102BK	Hotel Accessory Plate - 2 Gang Gridpro® Frontplate With Twin New Media Aperture Cover Plate - Matt Black
SCP31102BS	Hotel Accessory Plate - 2 Gang Gridpro® Frontplate With Twin New Media Aperture Cover Plate - Brushed Stainless
SCP31102CH	Hotel Accessory Plate - 2 Gang Gridpro® Frontplate With Twin New Media Aperture Cover Plate - Polished Chrome
SCP31102PW	Hotel Accessory Plate - 2 Gang Gridpro® Frontplate With Twin New Media Aperture Cover Plate - White
SCP31102SS	Hotel Accessory Plate - 2 Gang Gridpro® Frontplate With Twin New Media Aperture Cover Plate - Stainless Steel

CLIP-ON MODULES

NO YOKE

Definity™ Hotel Accessory GridPro® Insert

SIN31102BK	Hotel Accessory Plate - 2 Gang Gridpro® Frontplate With Twin New Media Aperture Insert


STANDARD BACK BOX

new media™


See our dedicated New Media™ section for more information on the range of New Media™ modules available.

Back Box Depth: Dependant on module used
Dimensions: 146mm x 86mm x 4mm

Understanding the code:
SCP - Plate Style **31102** - Product No. **CH** - Plate Finish
CH Polished Chrome, **BS** Brushed Stainless, **SS** Stainless Steel, **BK** Matt Black, **PW** White.

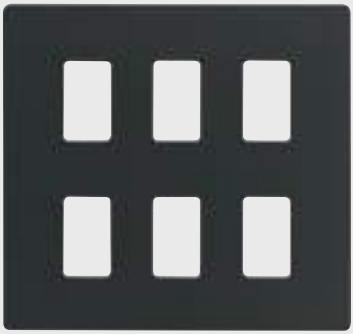

SCP20506BK

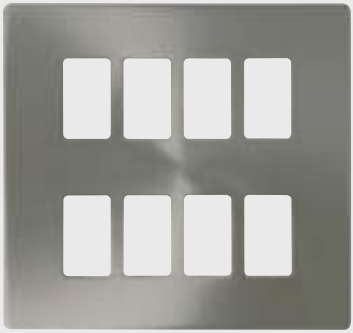

SCP20508BS

definity™

The Definity™ GridPro® frontplates on this page require the designated 3 and 4 module insert shown here.



SIN20400

definity™

Requires designated insert.
Compatible with Back Box WA512.
For more information on Back Boxes see from page i137.

Definity™ 6 Gang GridPro® Frontplates

SCP20506BK	6 Gang GridPro® Frontplate - Black
SCP20506BS	6 Gang GridPro® Frontplate - Brushed Stainless
SCP20506CH	6 Gang GridPro® Frontplate - Polished Chrome
SCP20506PW	6 Gang GridPro® Frontplate - White
SCP20506SS	6 Gang GridPro® Frontplate - Stainless Steel

Definity™ 8 Gang GridPro® Frontplates

SCP20508BK	8 Gang GridPro® Frontplate - Black
SCP20508BS	8 Gang GridPro® Frontplate - Brushed Stainless
SCP20508CH	8 Gang GridPro® Frontplate - Polished Chrome
SCP20508PW	8 Gang GridPro® Frontplate - White
SCP20508SS	8 Gang GridPro® Frontplate - Stainless Steel

CLIP-ON MODULES

NO YOKE

Definity™ Module Insert

SIN20400	3 & 4 GridPro® Module Insert

Back Box Depth: 47mm Minimum
Dimensions: 146mm x 146mm x 4mm

Understanding the code:
SCP - Plate Style **20401** - Product No. **CH** - Plate Finish
CH Polished Chrome, **BS** Brushed Stainless, **SS** Stainless Steel, **BK** Matt Black, **PW** White.





Define® GridPro® Frontplates


The Decorative Flat Plate Range

The Define® flat plate range of accessories offers up a host of new design opportunities with a comprehensive range of electrical accessory products available in 5 different decorative plate finishes.

define®

Fully Adjustable Assembly

1. Fit and secure appropriate back box and yoke with tabs removed. Pull the cable through yoke and strip insulation accordingly. Ensure an earth connection between frame and yoke (if required). The fixing screws are backed off to allow adjustment for yoke.

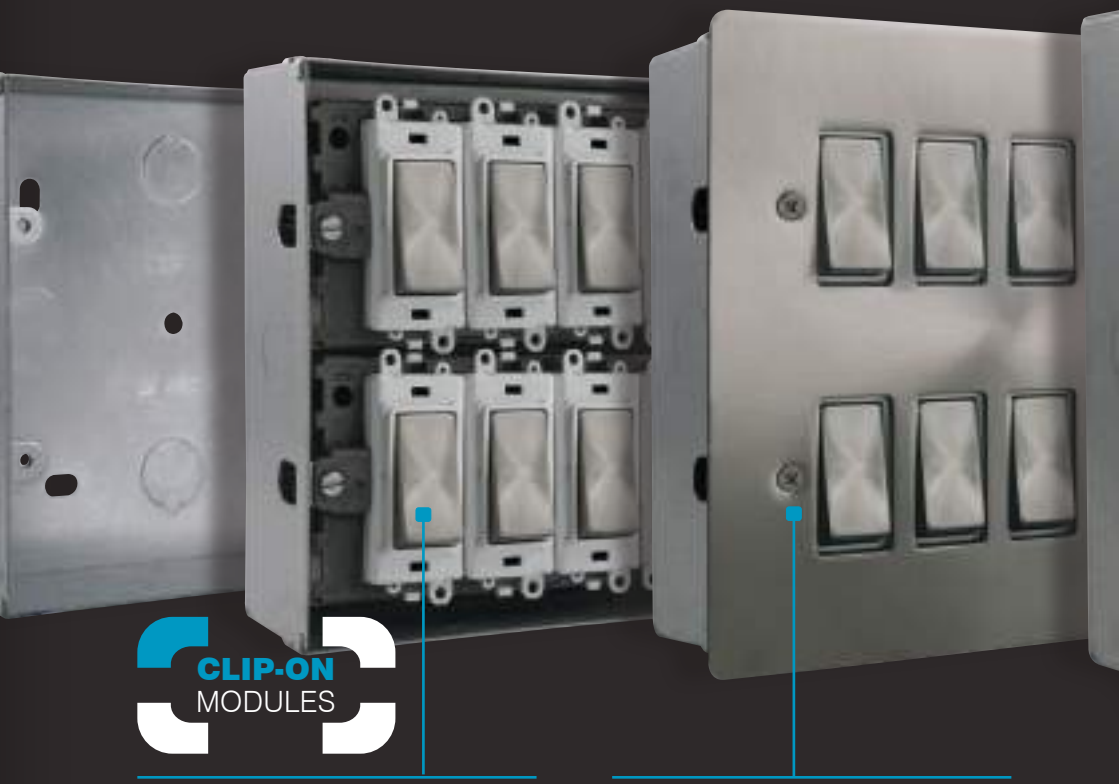

2. Systematically terminate cables into each module. Clip modules into yoke with a pivot motion.

3. Attach the frontplate using the fixing screws provided. The yokes containing the modules sit behind the frontplate until the captive fixing screws tighten up and pull them forward into place.

GRIDPRO

essentials™ define®





4. The position of the frontplate in relation to the wall can be adjusted by the captive fixing screws. If the back box is not recessed level with the wall then the yoke will adjust so that the frontplate mounts flush to the wall.

To accommodate Metal Clad and Define® frontplates there is an adjustment in the yoke feature.



FPBN20401



FPCH20401



FPPN20401



FPBS20402



FPSS20402



FPPN20402

define®

Accessory can be used with standard BS4662 Back Boxes.

Define® 1 Gang GridPro® Frontplates

FPBN20401	1 Gang GridPro® Frontplate - Black Nickel
FPBS20401	1 Gang GridPro® Frontplate - Brushed Stainless
FPCH20401	1 Gang GridPro® Frontplate - Polished Chrome
FPPN20401	1 Gang GridPro® Frontplate - Pearl Nickel
FPSS20401	1 Gang GridPro® Frontplate - Stainless Steel

Define® 2 Gang GridPro® Frontplates

FPBN20402	2 Gang GridPro® Frontplate - Black Nickel
FPBS20402	2 Gang GridPro® Frontplate - Brushed Stainless
FPCH20402	2 Gang GridPro® Frontplate - Polished Chrome
FPPN20402	2 Gang GridPro® Frontplate - Pearl Nickel
FPSS20402	2 Gang GridPro® Frontplate - Stainless Steel

SCREW-IN MODULES

NO YOKE


STANDARD BACK BOX

Back Box Depth: Dependant on module used
Dimensions: 88mm x 88mm x 1.3mm *Excluding gasket

Understanding the code:
FP - Plate Style **BN** - Plate Finish **20401** - Product No.
CH Polished Chrome, **BN** Black Nickel, **PN** Pearl Nickel, **BS** Brushed Stainless, **SS** Stainless Steel.




FPBN20403

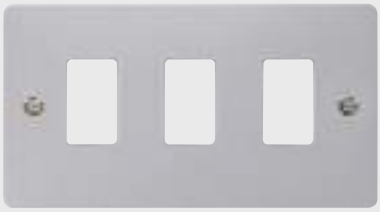

FPCH20403



FPPN20404

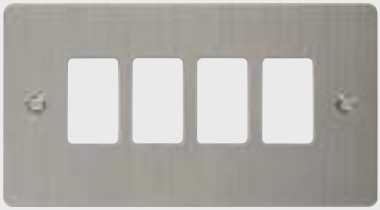

FPSS20404

Accessory can be used with standard BS4662 Back Boxes.

define®

Define® 3 Gang GridPro® Frontplates

FPBN20403	3 Gang GridPro® Frontplate - Black Nickel
FPBS20403	3 Gang GridPro® Frontplate - Brushed Stainless
FPCH20403	3 Gang GridPro® Frontplate - Polished Chrome
FPPN20403	3 Gang GridPro® Frontplate - Pearl Nickel
FPSS20403	3 Gang GridPro® Frontplate - Stainless Steel

Define® 4 Gang GridPro® Frontplates

FPBN20404	4 Gang GridPro® Frontplate - Black Nickel
FPBS20404	4 Gang GridPro® Frontplate - Brushed Stainless
FPCH20404	4 Gang GridPro® Frontplate - Polished Chrome
FPPN20404	4 Gang GridPro® Frontplate - Pearl Nickel
FPSS20404	4 Gang GridPro® Frontplate - Stainless Steel

SCREW-IN MODULES

NO YOKE

STANDARD BACK BOX

Back Box Depth: Dependant on module used
Dimensions: 146mm x 88mm x 1.3mm *Excluding gasket

Understanding the code:
FP - Plate Style **BN** - Plate Finish **20404** - Product No.
CH Polished Chrome, **BN** Black Nickel, **PN** Pearl Nickel, **BS** Brushed Stainless, **SS** Stainless Steel.




FPCH31102



FPBN31102



FPBS31102

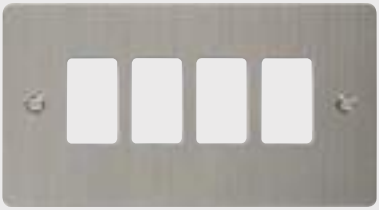

FPSS31102

define®

Accessory can be used with standard BS4662 Back Boxes.

Define® Hotel Accessory GridPro® Frontplates

FPBN31102	Hotel Accessory Plate - 2 Gang Gridpro® Frontplate With Twin New Media Aperture - Black Nickel
FPBS31102	Hotel Accessory Plate - 2 Gang Gridpro® Frontplate With Twin New Media Aperture - Brushed Stainless
FPCH31102	Hotel Accessory Plate - 2 Gang Gridpro® Frontplate With Twin New Media Aperture - Polished Chrome
FPPN31102	Hotel Accessory Plate - 2 Gang Gridpro® Frontplate With Twin New Media Aperture - Pearl Nickel
FPSS31102	Hotel Accessory Plate - 2 Gang Gridpro® Frontplate With Twin New Media Aperture - Stainless Steel

SCREW-IN MODULES

NO YOKE

STANDARD BACK BOX

new media™


See our dedicated New Media™ section for more information on the range of New Media™ modules available.

Back Box Depth: Dependant on module used
Dimensions: 146mm x 88mm x 1.3mm *Excluding gasket

Understanding the code:
FP - Plate Style **BN** - Plate Finish **31102** - Product No.
CH Polished Chrome, **BN** Black Nickel, **PN** Pearl Nickel, **BS** Brushed Stainless, **SS** Stainless Steel.



FPPN20506

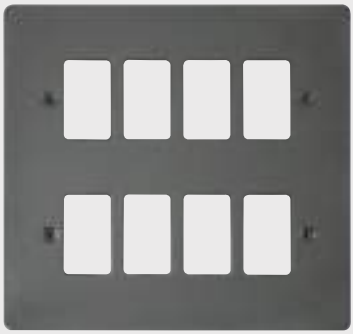

FPBN20508

Compatible with Back Box WA512.
For more information on Back Boxes and Yokes see from page i137.

define®

Define® 6 Gang GridPro® Frontplates

FPBN20506	6 Gang GridPro® Frontplate - Black Nickel
FPBS20506	6 Gang GridPro® Frontplate - Brushed Stainless
FPCH20506	6 Gang GridPro® Frontplate - Polished Chrome
FPPN20506	6 Gang GridPro® Frontplate - Pearl Nickel
FPSS20506	6 Gang GridPro® Frontplate - Stainless Steel

Define® 8 Gang GridPro® Frontplates


FPBN20508	8 Gang GridPro® Frontplate - Black Nickel
FPBS20508	8 Gang GridPro® Frontplate - Brushed Stainless
FPCH20508	8 Gang GridPro® Frontplate - Polished Chrome
FPPN20508	8 Gang GridPro® Frontplate - Pearl Nickel
FPSS20508	8 Gang GridPro® Frontplate - Stainless Steel

CLIP-ON MODULES


SNAP TABS FITTING INSIDE BACK BOX

Back Box Depth: 47mm Minimum
Dimensions: 146mm x 146mm x 1.3mm *Excluding gasket

Understanding the code:
FP - Plate Style **BN** - Plate Finish **20404** - Product No.
CH Polished Chrome, **BN** Black Nickel, **PN** Pearl Nickel, **BS** Brushed Stainless, **SS** Stainless Steel.

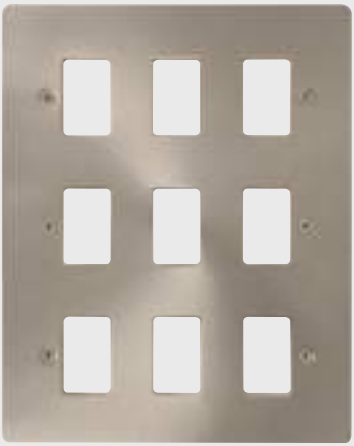

FPBS20509

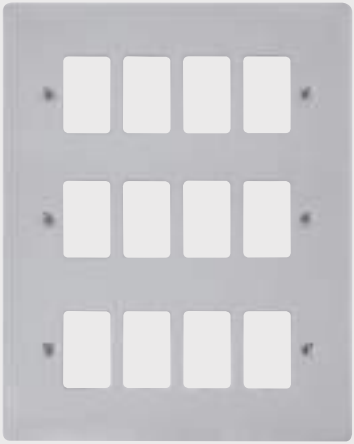

FPCH20512

define®

Compatible with Back Box WA518.
For more information on Back Boxes and Yokes see from page i137.

Define® 9 Gang GridPro® Frontplates

FPBN20509	9 Gang GridPro® Frontplate - Black Nickel
FPBS20509	9 Gang GridPro® Frontplate - Brushed Stainless
FPCH20509	9 Gang GridPro® Frontplate - Polished Chrome
FPPN20509	9 Gang GridPro® Frontplate - Pearl Nickel
FPSS20509	9 Gang GridPro® Frontplate - Stainless Steel

Define® 12 Gang GridPro® Frontplates


FPBN20512	12 Gang GridPro® Frontplate - Black Nickel
FPBS20512	12 Gang GridPro® Frontplate - Brushed Stainless
FPCH20512	12 Gang GridPro® Frontplate - Polished Chrome
FPPN20512	12 Gang GridPro® Frontplate - Pearl Nickel
FPSS20512	12 Gang GridPro® Frontplate - Stainless Steel

CLIP-ON MODULES

SNAP TABS FITTING INSIDE BACK BOX

Back Box Depth: 47mm Minimum
Dimensions: 146mm x 207mm x 1.3mm *Excluding gasket

Understanding the code:
FP - Plate Style **BN** - Plate Finish **20509** - Product No.
CH Polished Chrome, **BN** Black Nickel, **PN** Pearl Nickel, **BS** Brushed Stainless, **SS** Stainless Steel.

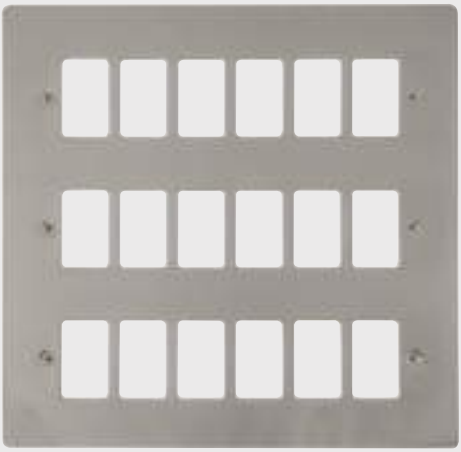

FPPN20518

Compatible with Back Box WA20518.
For more information on Back Boxes and Yokes see from page i137.

define®

Define® 18 Gang GridPro® Frontplates


FPBN20518	18 Gang GridPro® Frontplate - Black Nickel
FPBS20518	18 Gang GridPro® Frontplate - Brushed Stainless
FPCH20518	18 Gang GridPro® Frontplate - Polished Chrome
FPPN20518	18 Gang GridPro® Frontplate - Pearl Nickel
FPSS20518	18 Gang GridPro® Frontplate - Stainless Steel

CLIP-ON MODULES

SNAP TABS FITTING INSIDE BACK BOX

Back Box Depth: 56mm Minimum
Dimensions: 196mm x 206mm x 1.3mm *Excluding gasket

Understanding the code:
FP - Plate Style **BN** - Plate Finish **20518** - Product No.
CH Polished Chrome, **BN** Black Nickel, **PN** Pearl Nickel, **BS** Brushed Stainless, **SS** Stainless Steel.

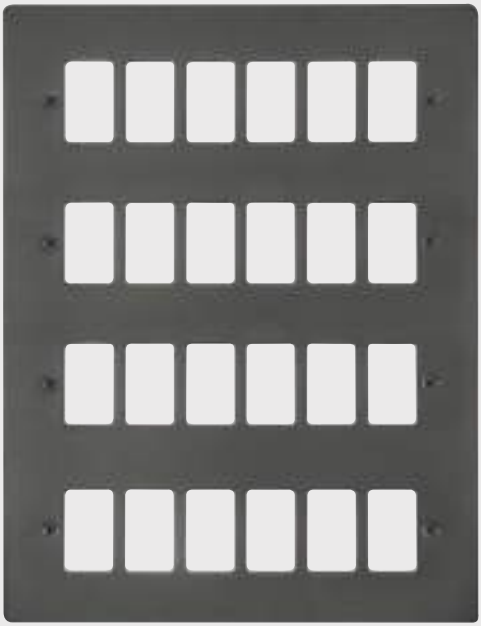

FPBN20524

define®

Compatible with Back Box WA20524.
For more information on Back Boxes and Yokes see from page i137.

Define® 24 Gang GridPro® Frontplates

FPBN20524	24 Gang GridPro® Frontplate - Black Nickel
FPBS20524	24 Gang GridPro® Frontplate - Brushed Stainless
FPCH20524	24 Gang GridPro® Frontplate - Polished Chrome
FPPN20524	24 Gang GridPro® Frontplate - Pearl Nickel
FPSS20524	24 Gang GridPro® Frontplate - Stainless Steel

CLIP-ON MODULES

SNAP TABS FITTING INSIDE BACK BOX

Back Box Depth: 56mm Minimum
Dimensions: 196mm x 266mm x 1.3mm *Excluding gasket

Understanding the code:
FP - Plate Style **BN** - Plate Finish **20518** - Product No.
CH Polished Chrome, **BN** Black Nickel, **PN** Pearl Nickel, **BS** Brushed Stainless, **SS** Stainless Steel.

Deco® GridPro® Frontplates

Decorative Metal Wiring Accessories.

Available in 8 finishes, a brand that is synonymous with high quality, long life, high specification and unprecedented value for money.

deco







VPCH20401



VPSB20401



VPSS20401



VPPN20402



VPSC20402



VPBN20402

deco

Accessory can be used with standard BS4662 Back Boxes.

Deco® 1 Gang GridPro® Frontplates

VPAB20401	1 Gang GridPro® Frontplate - Antique Brass
VPBN20401	1 Gang GridPro® Frontplate - Black Nickel
VPBR20401	1 Gang GridPro® Frontplate - Polished Brass
VPCH20401	1 Gang GridPro® Frontplate - Polished Chrome
VPPN20401	1 Gang GridPro® Frontplate - Pearl Nickel
VPSB20401	1 Gang GridPro® Frontplate - Satin Brass
VPSC20401	1 Gang GridPro® Frontplate - Satin Chrome
VPSS20401	1 Gang GridPro® Frontplate - Stainless Steel

Deco® 2 Gang GridPro® Frontplates

VPAB20402	2 Gang GridPro® Frontplate - Antique Brass
VPBN20402	2 Gang GridPro® Frontplate - Black Nickel
VPBR20402	2 Gang GridPro® Frontplate - Polished Brass
VPCH20402	2 Gang GridPro® Frontplate - Polished Chrome
VPPN20402	2 Gang GridPro® Frontplate - Pearl Nickel
VPSB20402	2 Gang GridPro® Frontplate - Satin Brass
VPSC20402	2 Gang GridPro® Frontplate - Satin Chrome
VPSS20402	2 Gang GridPro® Frontplate - Stainless Steel


SCREW-IN MODULES

NO YOKE

STANDARD BACK BOX

Back Box Depth: Dependant on module used
Dimensions: 88mm x 88mm x 8mm


Understanding the code:
VP - Plate Style **BN** - Plate Finish **20401** - Product No.
CH Polished Chrome, **SC** Satin Chrome, **BR** Polished Brass, **BN** Black Nickel, **PN** Pearl Nickel,
AB Antique Brass, **SB** Satin Brass, **SS** Stainless Steel.

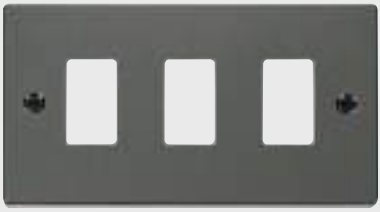

VPBN20403



VPBR20403

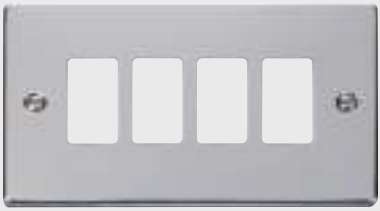

VPCH20404



VPAB20404

Accessory can be used with standard BS4662 Back Boxes.

deco

Deco® 3 Gang GridPro® Frontplates

VPAB20403	3 Gang GridPro® Frontplate - Antique Brass
VPBN20403	3 Gang GridPro® Frontplate - Black Nickel
VPBR20403	3 Gang GridPro® Frontplate - Polished Brass
VPCH20403	3 Gang GridPro® Frontplate - Polished Chrome
VPPN20403	3 Gang GridPro® Frontplate - Pearl Nickel
VPSB20403	3 Gang GridPro® Frontplate - Satin Brass
VPSC20403	3 Gang GridPro® Frontplate - Satin Chrome
VPSS20403	3 Gang GridPro® Frontplate - Stainless Steel

Deco® 4 Gang GridPro® Frontplates

VPAB20404	4 Gang GridPro® Frontplate - Antique Brass
VPBN20404	4 Gang GridPro® Frontplate - Black Nickel
VPBR20404	4 Gang GridPro® Frontplate - Polished Brass
VPCH20404	4 Gang GridPro® Frontplate - Polished Chrome
VPPN20404	4 Gang GridPro® Frontplate - Pearl Nickel
VPSB20404	4 Gang GridPro® Frontplate - Satin Brass
VPSC20404	4 Gang GridPro® Frontplate - Satin Chrome
VPSS20404	4 Gang GridPro® Frontplate - Stainless Steel


SCREW-IN MODULES

NO YOKE

STANDARD BACK BOX

Back Box Depth: Dependant on module used
Dimensions: 146mm x 88mm x 8mm

Understanding the code:
VP - Plate Style **BN** - Plate Finish **20403** - Product No.
CH Polished Chrome, **SC** Satin Chrome, **BR** Polished Brass, **BN** Black Nickel, **PN** Pearl Nickel,
AB Antique Brass, **SB** Satin Brass, **SS** Stainless Steel.

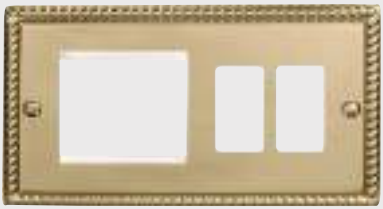

GCBR31102



VPSC31102



VPPN31102



VPAB31102

deco

Accessory can be used with standard BS4662 Back Boxes.

Deco® Hotel Accessory GridPro Frontplates

VPAB31102	Hotel Accessory Plate - 2 Gang Gridpro® Frontplate With Twin New Media Aperture - Antique Brass
VPBN31102	Hotel Accessory Plate - 2 Gang Gridpro® Frontplate With Twin New Media Aperture - Black Nickel
VPBR31102	Hotel Accessory Plate - 2 Gang Gridpro® Frontplate With Twin New Media Aperture - Polished Brass
VPCH31102	Hotel Accessory Plate - 2 Gang Gridpro® Frontplate With Twin New Media Aperture - Polished Chrome
VPPN31102	Hotel Accessory Plate - 2 Gang Gridpro® Frontplate With Twin New Media Aperture - Pearl Nickel
VPSB31102	Hotel Accessory Plate - 2 Gang Gridpro® Frontplate With Twin New Media Aperture - Satin Brass
VPSC31102	Hotel Accessory Plate - 2 Gang Gridpro® Frontplate With Twin New Media Aperture - Satin Chrome
VPSS31102	Hotel Accessory Plate - 2 Gang Gridpro® Frontplate With Twin New Media Aperture - Stainless Steel

SCREW-IN MODULES

NO YOKE


STANDARD BACK BOX

new media™


See our dedicated New Media™ section for more information on the range of New Media™ modules available.

Back Box Depth: Dependant on module used
Dimensions: 146mm x 88mm x 8mm

Understanding the code:
VP - Plate Style **BN** - Plate Finish **31102** - Product No.
CH Polished Chrome, **SC** Satin Chrome, **BR** Polished Brass, **BN** Black Nickel, **PN** Pearl Nickel, **AB** Antique Brass, **SB** Satin Brass, **SS** Stainless Steel.

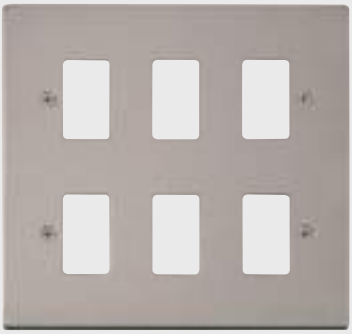

VPPN20506

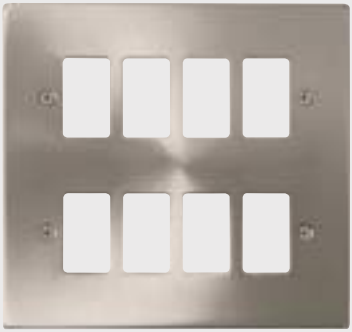

VPSC20508

Compatible with Back Box WA512.
For more information on Back Boxes and Yokes see from page i137.

deco

Deco® 6 Gang GridPro® Frontplates

VPAB20506	6 Gang GridPro® Frontplate - Antique Brass
VPBN20506	6 Gang GridPro® Frontplate - Black Nickel
VPBR20506	6 Gang GridPro® Frontplate - Polished Brass
VPCH20506	6 Gang GridPro® Frontplate - Polished Chrome
VPPN20506	6 Gang GridPro® Frontplate - Pearl Nickel
VPSB20506	6 Gang GridPro® Frontplate - Satin Brass
VPSC20506	6 Gang GridPro® Frontplate - Satin Chrome
VPSS20506	6 Gang GridPro® Frontplate - Stainless Steel

Deco® 8 Gang GridPro® Frontplates


VPAB20508	8 Gang GridPro® Frontplate - Antique Brass
VPBN20508	8 Gang GridPro® Frontplate - Black Nickel
VPBR20508	8 Gang GridPro® Frontplate - Polished Brass
VPCH20508	8 Gang GridPro® Frontplate - Polished Chrome
VPPN20508	8 Gang GridPro® Frontplate - Pearl Nickel
VPSB20508	8 Gang GridPro® Frontplate - Satin Brass
VPSC20508	8 Gang GridPro® Frontplate - Satin Chrome
VPSS20508	8 Gang GridPro® Frontplate - Stainless Steel

CLIP-ON MODULES


WITH TABS FITTING ON BACK BOX SURFACE

Back Box Depth: 47mm Minimum
Dimensions: 146mm x 146mm x 8mm

Understanding the code:
VP - Plate Style **BN** - Plate Finish **20506** - Product No.
CH Polished Chrome, **SC** Satin Chrome, **BR** Polished Brass, **BN** Black Nickel, **PN** Pearl Nickel,
AB Antique Brass, **SB** Satin Brass, **SS** Stainless Steel.

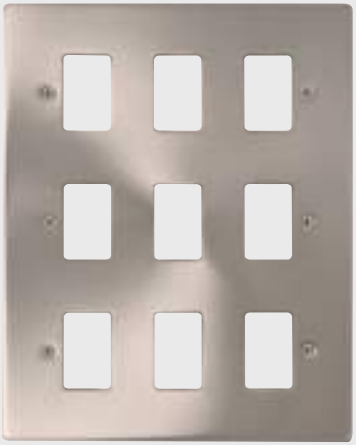

VPSC20509

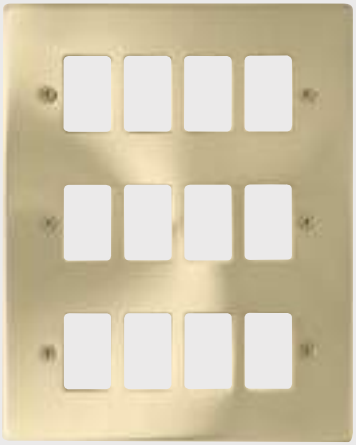

VPSB20512

deco

Compatible with Back Box WA518.
For more information on Back Boxes and Yokes see from page i137.

Deco® 9 Gang GridPro® Frontplates

VPAB20509	9 Gang GridPro® Frontplate - Antique Brass
VPBN20509	9 Gang GridPro® Frontplate - Black Nickel
VPBR20509	9 Gang GridPro® Frontplate - Polished Brass
VPCH20509	9 Gang GridPro® Frontplate - Polished Chrome
VPPN20509	9 Gang GridPro® Frontplate - Pearl Nickel
VPSB20509	9 Gang GridPro® Frontplate - Satin Brass
VPSC20509	9 Gang GridPro® Frontplate - Satin Chrome
VPSS20509	9 Gang GridPro® Frontplate - Stainless Steel

Deco® 12 Gang GridPro® Frontplates


VPAB20512	12 Gang GridPro® Frontplate - Antique Brass
VPBN20512	12 Gang GridPro® Frontplate - Black Nickel
VPBR20512	12 Gang GridPro® Frontplate - Polished Brass
VPCH20512	12 Gang GridPro® Frontplate - Polished Chrome
VPPN20512	12 Gang GridPro® Frontplate - Pearl Nickel
VPSB20512	12 Gang GridPro® Frontplate - Satin Brass
VPSC20512	12 Gang GridPro® Frontplate - Satin Chrome
VPSS20512	12 Gang GridPro® Frontplate - Stainless Steel

CLIP-ON MODULES

WITH TABS FITTING ON BACK BOX SURFACE

Back Box Depth: 47mm Minimum
Dimensions: 146mm x 206mm x 8mm

Understanding the code:
VP - Plate Style **BN** - Plate Finish **20509** - Product No.
CH Polished Chrome, **SC** Satin Chrome, **BR** Polished Brass, **BN** Black Nickel, **PN** Pearl Nickel,
AB Antique Brass, **SB** Satin Brass, **SS** Stainless Steel.

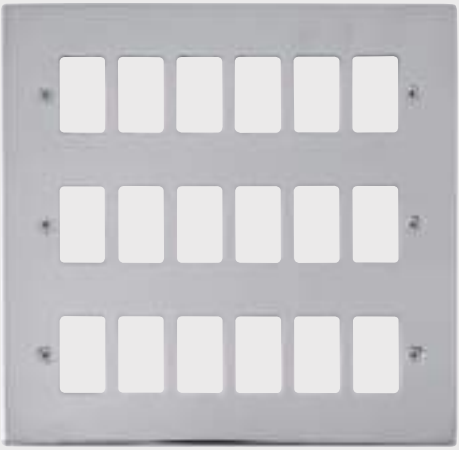

VPCH20518

Compatible with Back Box WA20518.
For more information on Back Boxes and Yokes see from page i137.

deco

Deco® 18 Gang GridPro® Frontplates


VPAB20518	18 Gang GridPro® Frontplate - Antique Brass
VPBN20518	18 Gang GridPro® Frontplate - Black Nickel
VPBR20518	18 Gang GridPro® Frontplate - Polished Brass
VPCH20518	18 Gang GridPro® Frontplate - Polished Chrome
VPPN20518	18 Gang GridPro® Frontplate - Pearl Nickel
VPSB20518	18 Gang GridPro® Frontplate - Satin Brass
VPSC20518	18 Gang GridPro® Frontplate - Satin Chrome
VPSS20518	18 Gang GridPro® Frontplate - Stainless Steel

CLIP-ON MODULES

WITH TABS FITTING ON BACK BOX SURFACE

Back Box Depth: 56mm Minimum
Dimensions: 196mm x 207mm x 8mm

Understanding the code:
VP - Plate Style **BN** - Plate Finish **20506** - Product No.
CH Polished Chrome, **SC** Satin Chrome, **BR** Polished Brass, **BN** Black Nickel, **PN** Pearl Nickel,
AB Antique Brass, **SB** Satin Brass, **SS** Stainless Steel.

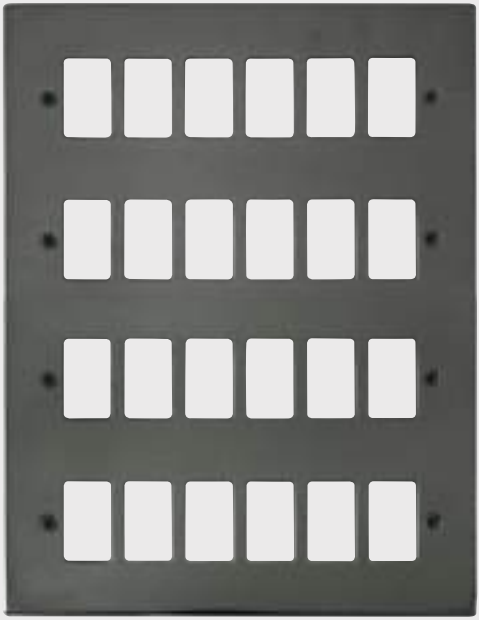

VPBN20524

deco

Compatible with Back Box WA20524.
For more information on Back Boxes and Yokes see from page i137.

Deco® 24 Gang GridPro® Frontplates

VPAB20524	24 Gang GridPro® Frontplate - Antique Brass
VPBN20524	24 Gang GridPro® Frontplate - Black Nickel
VPBR20524	24 Gang GridPro® Frontplate - Polished Brass
VPCH20524	24 Gang GridPro® Frontplate - Polished Chrome
VPPN20524	24 Gang GridPro® Frontplate - Pearl Nickel
VPSB20524	24 Gang GridPro® Frontplate - Satin Brass
VPSC20524	24 Gang GridPro® Frontplate - Satin Chrome
VPSS20524	24 Gang GridPro® Frontplate - Stainless Steel

CLIP-ON MODULES

WITH TABS FITTING ON BACK BOX SURFACE

Back Box Depth: 56mm Minimum
Dimensions: 196mm x 267mm x 8mm

Understanding the code:
VP - Plate Style **BN** - Plate Finish **20509** - Product No.
CH Polished Chrome, **SC** Satin Chrome, **BR** Polished Brass, **BN** Black Nickel, **PN** Pearl Nickel,
AB Antique Brass, **SB** Satin Brass, **SS** Stainless Steel.



Mode® GridPro® Frontplates

A stylish, contemporary and flexible range of smooth profile wiring accessories

MODE®

Mode® accessories have been designed and developed as a high quality, flexible and modern solution to virtually any domestic or commercial wiring requirement.

All Mode® accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases.

All products were independently tested and achieved a 99.9% kill rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, and Klebsiella Pneumoniae.



CMA20401



CMA20403



CMA20404



CMA31102

MODE®

Antimicrobial certified products.
Accessory can be used with standard BS4662 Back Boxes.
Compatible with standard Click® surface mounted boxes.

Mode® 1 Gang GridPro® Frontplates

CMA20401 1 Gang GridPro® Frontplate

Mode® 2 Gang GridPro® Frontplates

CMA20402 2 Gang GridPro® Frontplate

Mode® 3 Gang GridPro® Frontplates

CMA20403 3 Gang GridPro® Frontplate

Mode® 4 Gang GridPro® Frontplates

CMA20404 4 Gang GridPro® Frontplate

Mode® Hotel Accessory GridPro® Frontplates

CMA31102 Hotel Accessory Plate - 2 Gang Gridpro® Frontplate
With Twin New Media Aperture - White

SCREW-IN MODULES

NO YOKE

STANDARD BACK BOX

new media™

See our dedicated New Media™ section for more information on the range of New Media™ modules available.

ANTIMICROBIAL PRODUCTS

Back Box Depth: Dependant on module used
Dimensions: **1 Gang:** 86mm x 86mm x 9.5mm, **2 Gang:** 146mm x 86mm x 9.5mm



CMA20506



CMA20508

Antimicrobial certified products.
Compatible with Back Box WA512.
For more information on Back Boxes and Yokes see from page i137.

MODE®

Mode® 6 Gang GridPro® Frontplates

CMA20506 6 Gang GridPro® Frontplate

Mode® 8 Gang GridPro® Frontplates


CMA20508 8 Gang GridPro® Frontplate - Mode

CLIP-ON MODULES

WITH TABS FITTING ON BACK BOX SURFACE

ANTIMICROBIAL PRODUCTS

Back Box Depth: 47mm Minimum
Dimensions: 146mm x 146mm x 9.5mm

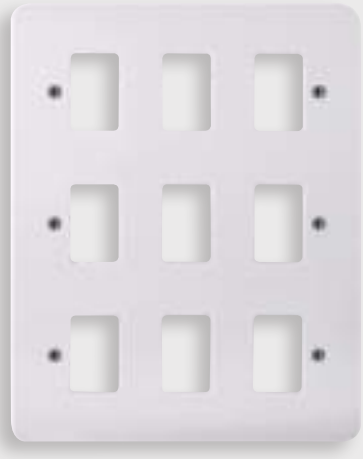

CMA20509



CMA20512

MODE®

Antimicrobial certified products.
Compatible with Back Box WA518.
For more information on Back Boxes and Yokes see from page i137.

Mode® 9 Gang GridPro® Frontplates

CMA20509 9 Gang GridPro® Frontplate - Mode

Mode® 12 Gang GridPro® Frontplates


CMA20512 12 Gang GridPro® Frontplate

CLIP-ON MODULES

WITH TABS FITTING ON BACK BOX SURFACE

ANTIMICROBIAL PRODUCTS

Back Box Depth: 47mm Minimum
Dimensions: 146mm x 206mm x 9.5mm

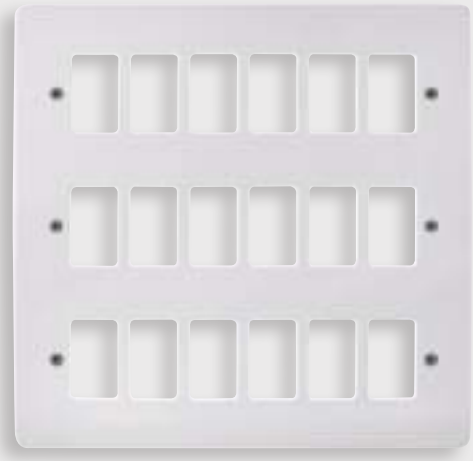

CMA20518

Antimicrobial certified products.
Compatible with Back Box WA20518.
For more information on Back Boxes and Yokes see from page i137.

MODE®

Mode® 18 Gang GridPro® Frontplates


CMA20518 18 Gang GridPro® Frontplate

CLIP-ON MODULES

WITH TABS FITTING ON BACK BOX SURFACE

ANTIMICROBIAL PRODUCTS

Back Box Depth: 56mm Minimum
Dimensions: 196mm x 206mm x 9.5mm

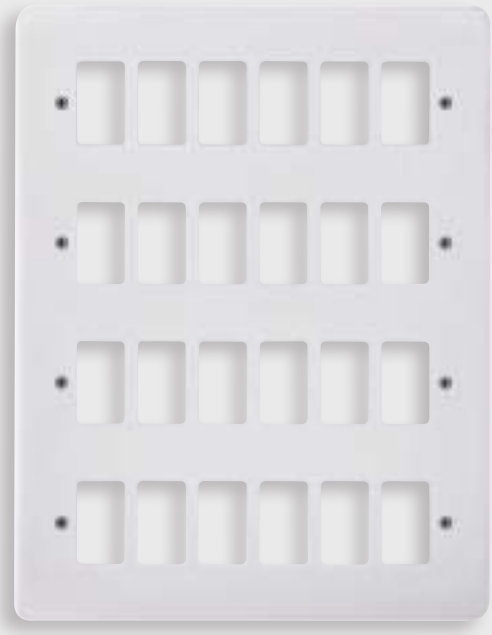

CMA20524

MODE®

Antimicrobial certified products.
Compatible with Back Box WA20524.
For more information on Back Boxes and Yokes see from page i137.

Mode® 24 Gang GridPro® Frontplates

CMA20524	24 Gang GridPro® Frontplate

CLIP-ON MODULES

WITH TABS FITTING ON BACK BOX SURFACE

ANTIMICROBIAL PRODUCTS

Back Box Depth: 56mm Minimum
Dimensions: 196mm x 266mm x 9.5mm



Polar™ GridPro® Frontplates

A premium range of bright white accessories

polar™

So confident are we of the durability and reliability of the Polar™ product that we guarantee these products against any fault in materials or manufacture for at least 20 years.

All Polar™ accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases.

All products were independently tested and achieved a 99.9% kill rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, and Klebsiella Pneumoniae.



PRW20402



PRW20403



PRW20404



PRW31102

polar

Antimicrobial certified products.
Accessory can be used with standard BS4662 Back Boxes.
Compatible with standard Click® surface mounted boxes.

Polar™ 1 Gang GridPro® Frontplates

PRW20401 1 Gang GridPro® Frontplate

Polar™ 2 Gang GridPro® Frontplates

PRW20402 2 Gang GridPro® Frontplate

Polar™ 3 Gang GridPro® Frontplates

PRW20403 3 Gang GridPro® Frontplate

Polar™ 4 Gang GridPro® Frontplates

PRW20404 4 Gang GridPro® Frontplate

Polar™ Hotel Accessory GridPro® Frontplates

PRW31102 Hotel Accessory Plate - 2 Gang Gridpro® Frontplate
With Twin New Media Aperture - White

SCREW-IN MODULES

NO YOKE


STANDARD BACK BOX

new media™


See our dedicated New Media™ section for more information on the range of New Media™ modules available.

ANTIMICROBIAL PRODUCTS

Back Box Depth: Dependant on module used
Dimensions: **1 Gang:** 86mm x 86mm x 11mm, **2 Gang:** 146mm x 86mm x 11mm

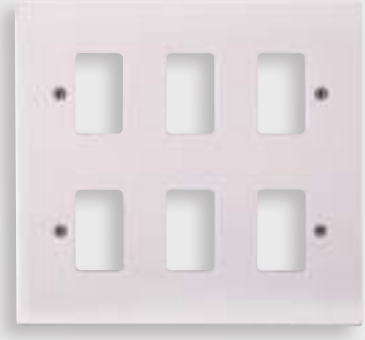

PRW20506

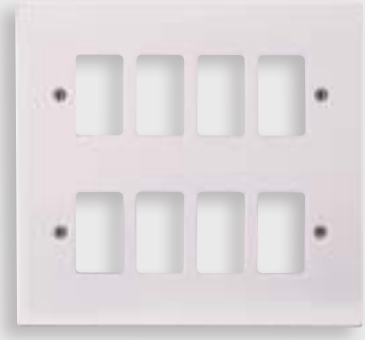

PRW20508

Antimicrobial certified products.
Compatible with Back Box WA512.
For more information on Back Boxes and Yokes see from page i137.

polar™

Polar™ 6 Gang GridPro® Frontplates

PRW20506 6 Gang GridPro® Frontplate

Polar™ 8 Gang GridPro® Frontplates


PRW20508 8 Gang GridPro® Frontplate - Polar

CLIP-ON MODULES

WITH TABS FITTING ON BACK BOX SURFACE

ANTIMICROBIAL PRODUCTS

Back Box Depth: 47mm Minimum
Dimensions: 146mm x 146mm x 9.5mm

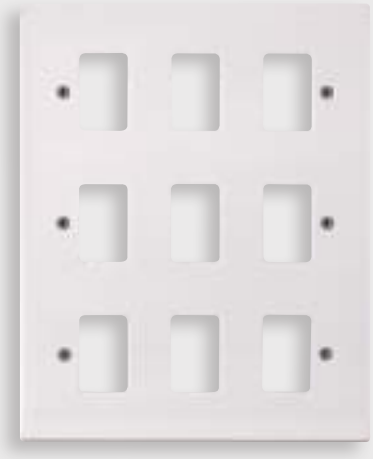

PRW20509



PRW20512

polar

Antimicrobial certified products.
Compatible with Back Box WA518.
For more information on Back Boxes and Yokes see from page i137.

Polar™ 9 Gang GridPro® Frontplates

PRW20509 9 Gang GridPro® Frontplate - Polar

Polar™ 12 Gang GridPro® Frontplates


PRW20512 12 Gang GridPro® Frontplate

CLIP-ON MODULES

WITH TABS FITTING ON BACK BOX SURFACE

ANTIMICROBIAL PRODUCTS

Back Box Depth: 47mm Minimum
Dimensions: 146mm x 206mm x 9.5mm

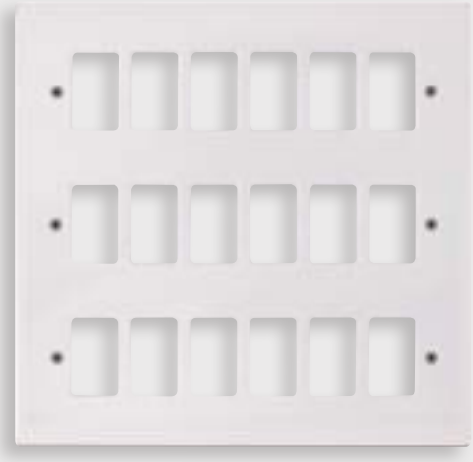

PRW20518

Antimicrobial certified products.
Compatible with Back Box WA20518.
For more information on Back Boxes and Yokes see from page i137.

polar™

Polar™ 18 Gang GridPro® Frontplates


PRW20518	18 Gang GridPro® Frontplate

CLIP-ON MODULES

WITH TABS FITTING ON BACK BOX SURFACE

ANTIMICROBIAL PRODUCTS

Back Box Depth: 56mm Minimum
Dimensions: 196mm x 206mm x 9.5mm

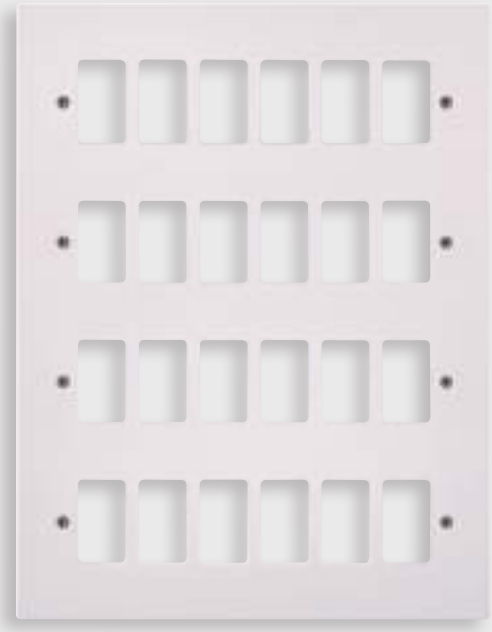

PRW20524

polar

Antimicrobial certified products.
Compatible with Back Box WA20524.
For more information on Back Boxes and Yokes see from page i137.

Polar™ 24 Gang GridPro® Frontplates

PRW20524	24 Gang GridPro® Frontplate

CLIP-ON MODULES

WITH TABS FITTING ON BACK BOX SURFACE

ANTIMICROBIAL PRODUCTS

Back Box Depth: 56mm Minimum
Dimensions: 196mm x 266mm 9.5mm



Metal Clad GridPro® Frontplates

A comprehensive selection of metal clad electrical accessory products are featured in the following pages. Electrophoretically coated plates and back boxes provide a durable and long lasting heavy duty finish to this attractive range of products.

essentials™





CL20401



CL20402



CL31102



CL20404B

essentials™

Supplied complete with 40mm deep Back Boxes.

Metal Clad GridPro® Frontplates with Back Box

CL20401	1 Gang GridPro® Frontplate & Back Box
CL20402	2 Gang GridPro® Frontplate & Back Box
CL20403	3 Gang GridPro® Frontplate & Back Box
CL20404	4 Gang GridPro® Frontplate & Back Box

Metal Clad GridPro® Frontplates with Back Box no Knockouts

CL20401B	1 Gang GridPro® Frontplate & Back Box (No Knockouts)
CL20402B	2 Gang GridPro® Frontplate & Back Box (No Knockouts)
CL20403B	3 Gang GridPro® Frontplate & Back Box (No Knockouts)
CL20404B	4 Gang GridPro® Frontplate & Back Box (No Knockouts)

Metal Clad Hotel Accessory GridPro® Frontplates

CL31102	Hotel Accessory Plate - 2 Gang Gridpro® Frontplate With Twin New Media Aperture With Back Box - Metal Clad
CL31102B	Hotel Accessory Plate - 2 Gang Gridpro® Frontplate With Twin New Media Aperture With Back Box (No Knockouts) - Metal Clad

SCREW-IN MODULES

NO YOKE

STANDARD BACK BOX

Back Box Depth: 40mm Minimum
Dimensions: **1 Gang:** 88mm x 88mm x 8mm **2 Gang:** 146mm x 88mm x 8mm
Knockouts: **1&2 Gang:** 5 x 20mm **3&4 Gang:** 7 x 20mm



CL20506



CL20508B

Supplied complete with 40mm deep Back Boxes.

essentials™

Metal Clad 6 Gang GridPro® Frontplates with Back Box

CL20506 6 Gang GridPro® Frontplate & Back Box

Metal Clad 6 Gang GridPro® Frontplates with Back Box

CL20506B 6 Gang GridPro® Frontplate & Back Box (No Knockouts)

Metal Clad 8 Gang GridPro® Frontplates with Back Box

CL20508 8 Gang GridPro® Frontplate & Back Box

Metal Clad 8 Gang GridPro® Frontplates with Back Box

CL20508B 8 Gang GridPro® Frontplate & Back Box (No Knockouts)

CLIP-ON MODULES

SNAP TABS FITTING INSIDE BACK BOX

Back Box Depth: 40mm Minimum
Dimensions: 146mm x 146mm **Knockouts:** 4 x 20mm, 4 x 25mm (Include 32mm x 67mm rear entry panel)



CL20509



CL20512B

essentials™

Supplied complete with 40mm deep Back Boxes.

Metal Clad 9 Gang GridPro® Frontplates with Back Box

CL20509 9 Gang GridPro® Frontplate & Back Box

Metal Clad 9 Gang GridPro® Frontplates with Back Box

CL20509B 9 Gang GridPro® Frontplate & Back Box (No Knockouts)

Metal Clad 12 Gang GridPro® Frontplates with Back Box

CL20512 12 Gang GridPro® Frontplate & Back Box

Metal Clad 12 Gang GridPro® Frontplates with Back Box no Knockouts

CL20512B 12 Gang GridPro® Frontplate & Back Box (No Knockouts)

CLIP-ON MODULES

SNAP TABS FITTING INSIDE BACK BOX

Back Box Depth: 40mm Minimum
Dimensions: 146mm x 207mm **Knockouts:** 5 x 20mm, 5 x 25mm (include 32mm x 67mm rear entry panel)



CL20518B

Supplied complete with 56mm deep Back Boxes.

essentials™

Metal Clad 18 Gang GridPro® Frontplates with Back Box

CL20518 18 Gang GridPro® Frontplate & Back Box

Metal Clad 18 Gang GridPro® Frontplates with Back Box no Knockouts

CL20518B 18 Gang GridPro® Frontplate & Back Box (No Knockouts)

CLIP-ON MODULES

SNAP TABS FITTING INSIDE BACK BOX

Back Box Depth: 56mm Minimum
Dimensions: 196mm x 206mm **Knockouts:** 3 x 20mm, 9 x 25mm (include 50mm x 102mm rear entry panel)



CL20524

essentials™

Supplied complete with 56mm deep Back Boxes.

Metal Clad 24 Gang GridPro® Frontplates with Back Box

CL20524 24 Gang GridPro® Frontplate & Back Box

Metal Clad 24 Gang GridPro® Frontplates with Back Box

CL20524B 24 Gang GridPro® Frontplate & Back Box (No Knockouts)

CLIP-ON MODULES

SNAP TABS FITTING INSIDE BACK BOX

Back Box Depth: 56mm Minimum
Dimensions: 196mm x 266mm **Knockouts:** 6 x 20mm, 6 x 25mm (include 50mm x 102mm rear entry panel)

Yokes & Back Boxes

Our universal yokes may be used for any Click® GridPro® frontplate styles* including Define® and Metal Clad variants.

*excluding the screwless Definity™ plates, which have their own dedicated inserts.

For the larger 6- 24 gang GridPro® frontplates we have a selection of compatible back boxes.



GR20400



GR20600

essentials™

GridPro® Universal Yokes

GR20400	GridPro® 3 & 4 Module Universal Yoke
GR20600	GridPro® 6 Module Universal Yoke



WA512



WA518

WA512
for use with 6 & 8 Gang GridPro® Frontplates.



WA518
for use with 9 & 12 Gang GridPro® Frontplates.



essentials™

Galvanised Steel Back Boxes

WA512	2 Tier 47mm Deep K.O. Box
WA518	3 Tier 47mm Deep K.O. Box

Back Box Depth: 47mm
Dimensions: **WA512:** 137mm x 137mm **WA518:** 137mm x 197mm
Knockouts: **WA512:** 7 x 20mm, 3 x 25mm **WA518:** 8 x 20mm, 4 x 25mm



WA20518



WA20524

WA20518
for use with 18 Gang GridPro® Frontplates.



WA20524
for use with 24 Gang GridPro® Frontplates.



essentials™

GridPro® Flush Mounted Back Boxes

WA20518	18 Gang GridPro® Flush Mounted Back Box - 56mm Deep
WA20524	24 Gang GridPro® Flush Mounted Back Box - 56mm Deep

Back Box Depth: 56mm
Dimensions: **WA20518:** 185mm x 197mm **WA20524:** 185mm x 255mm
Knockouts: **WA20518:** 10 x 20mm, 6 x 25mm **WA20524:** 10 x 20mm, 6 x 25mm

MINIGRID®

Minigrid™ Plates & Modules







MINIGRID®

Interchangeable Plates & Modules

Contents

Minigrid™ Plates

Unfurnished Plates **j5**
Yokes & Back Boxes **j7**
Deco Plus® Unfurnished Plates **j9**
Deco® Unfurnished Plates **j10**
Define® Unfurnished Plates **j11**
Definity™ Unfurnished Plates **j12**
Mode® & Part M™ Unfurnished Plates **j13**
Polar™ Unfurnished Plates **j14**
Metal Clad Unfurnished Plates **j15**
Red Unfurnished Plates **j16**

Minigrid™ Modules

1 & 2 Way Switch Modules **j18**
Intermediate Switch Module **j19**
2 Way Paddle Switch Module **j20**
2 Way Retractive Switch Module **j21**
DP Switch Module **j22**
2 Way Key switch Module **j23**
DP Key switch 'Emergency Test' Module **j24**
DP Key switch Module **j25**
Blank Module **j26**
Fused Connection Module **j27**
Flex Outlet Module **j28**
1 Way Retractive 'Bell' Switch Module **j29**
3 Position Switch Modules **j30**
Fan Isolation Switch Module **j32**
2 Way Switch Module **j33**
20A DP Switch Modules **j34**
Dimmer Module Mounting Kit **j36**
2 Way Toggle Switch Modules **j38**



This section serves to introduce the extended range of Click® Minigrid™ mounting plates and modules. All of these new items are comprehensively illustrated throughout the following pages.

Since the launch of the moulded Click® and Polar™ accessory ranges the modular switch arrangement standard in both products has proved to be a highly valued facility amongst designers and installers alike.

Simple, single screw installation of the modules on the mounting plates has encouraged contractors to devise and install customised switching solutions on-site.

The fully interchangeable Minigrid™ modules are fitted as standard into our moulded Polar™, Mode® & Part M™, decorative Define®, Deco® & Definity™ and Metal Clad ranges.


Minigrid™ Plates

The Minigrid™ plates illustrated on the following pages are all unfurnished for easy and quick configuration with required modules.








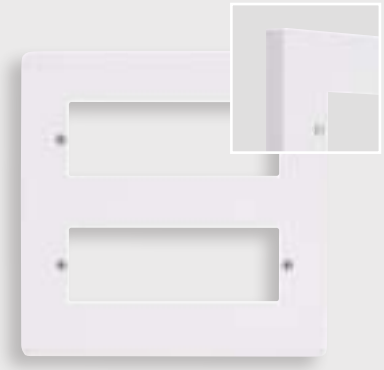

PRW612

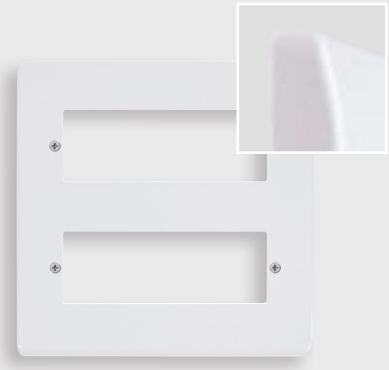

CMA612



CL512



VPAG512

PLEASE NOTE: 12 module plates can be fitted with a maximum of three 400W dimmer modules in a single row using the MD150 dimmer mounting kit. Please note that dimmers (except for MD9014) can not be fitted above each other.

2 Tier Unfurnished Plates - MiniGrid™


PRW612	2 Tier MiniGrid™ Unfurnished Plate & Yokes - 12 Apertures - Polar™
CMA612	2 Tier MiniGrid™ Unfurnished Plate & Yokes - 12 Apertures - Mode®
VPAG512	2 Tier MiniGrid™ Unfurnished Plate c/w Gaskets - 12 Apertures - Part M™
CL512	2 Tier MiniGrid™ Unfurnished Plate - 12 Apertures - Metal Clad

CMA612 & PRW612: GR101 yokes supplied complete with the frontplate


All Mode® & Polar™ accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products were independently tested and achieved a 99.9% kill rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, and Klebsiella Pneumoniae.

CL512 & VPAG512: requires 2 x GR100PW yokes

Back Box Depth: CMA/PRW: 47mm Minimum, **CL512:** 40mm Minimum
Dimensions: CMA512: 146mm x 153mm x 9.5mm **VPAG512:** 148 x 148mm x 8mm **PRW512**: 146mm x 146mm x 9.5mm **CL512:** 146mm x 146mm x 40mm

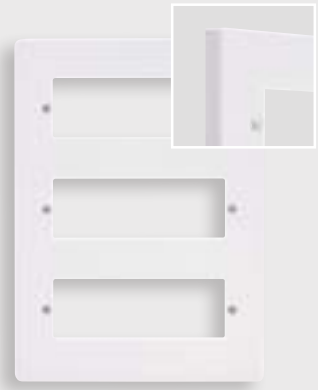

PRW618

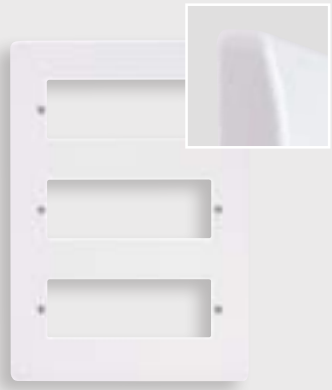

CMA618



CL518



VPAG518

PLEASE NOTE: 12 module plates can be fitted with a maximum of six 400W dimmer modules in a single row using the MD150 dimmer mounting kit. Please note that dimmers (except for MD9014) can not be fitted above each other.

3 Tier Unfurnished Plates - MiniGrid™

PRW618	3 Tier MiniGrid™ Unfurnished Plate & Yokes - 18 Apertures - Polar™	VPAG518	3 Tier MiniGrid™ Unfurnished Plate c/w Gaskets - 18 Apertures - Part M™
CMA618	3 Tier MiniGrid™ Unfurnished Plate & Yokes - 18 Apertures - Mode®	CL518	3 Tier MiniGrid™ Unfurnished Plate - 18 Apertures - Metal Clad

CMA618 & PRW618: GR101 yokes supplied complete with the frontplate

CL518 & VPAG518: requires 3 x GR100PW yokes

All Mode® & Polar™ accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products were independently tested and achieved a 99.9% kill rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, and Klebsiella Pneumoniae.

Back Box Depth: **CMA/PRW:** 47mm Minimum, **CL518:** 40mm Minimum
Dimensions: **CMA518:** 146mm x 214mm x 9.5mm **PRW518:** 146mm x 227mm x 9.5mm **CL518:** 148mm x 207mm x 40mm
VPAG518: 148mm x 227mm x 8mm



Example of yoke furnished with modules



GR100





WA512



WA518

Galvanised steel back boxes supplied for flush mounting of the large Minigrid™ plates.
Mounting yoke facilitates pre-assembly of required modules. Fitted with twin earth terminals.

Yokes

GR100BK	MiniGrid™ Module Yoke - 6 Apertures - Black
GR100PW	MiniGrid™ Module Yoke - 6 Apertures - White

2 or 3 yokes are required based on the backbox selected.

Yokes & recommended ranges:
Black - Deco®
Polar™ White - Polar™

Galvanised Steel Back Boxes

WA512	2 Tier 47mm Deep K.O. Box
WA518	3 Tier 47mm Deep K.O. Box

Cutout Sizes: **WA512:** 137mm x 137mm **WA518:** 137mm x 197mm



DPBN518



DPCH512



VPAB512



MINIGRID®

The furnished Deco® plate shown here contains five double width modules and eight single width modules.

GR100 yokes are required to mount the Minigrid™ modules into prior to assembling the frontplate.
See page j7 for yoke options.

Deco Plus® Unfurnished Plates c/w Gaskets - Minigrid™

DP**512 2 Tier MiniGrid™ Unfurnished Plate - 12 Apertures
DP**518 3 Tier MiniGrid™ Unfurnished Plate - 18 Apertures

Deco® Unfurnished Plates c/w Gaskets - Minigrid™

VP**512 2 Tier MiniGrid™ Unfurnished Plate - 12 Apertures
VP**518 3 Tier MiniGrid™ Unfurnished Plate - 18 Apertures

Back Box Depth: 47mm Minimum
Dimensions: **12 Module:** 148mm x 148mm x 8mm **18 Module:** 148mm x 227mm x 8mm

Deco® plates are available in **AB** Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome, **SS** Stainless Steel, **BN** Black Nickel, **PN** Pearl Nickel Please add 2 letter prefix to identify required finish i.e. VPCH311 for chrome.

Deco Plus® plates are available in **AB** Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome, **SS** Stainless Steel, **BN** Black Nickel Please add 2 letter prefix to identify required finish i.e. DPBN036 for black nickel.



401



402




471



472



403

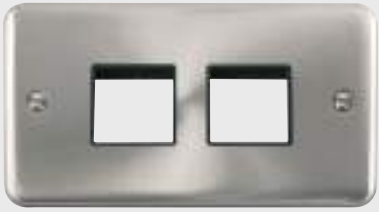

404



406



426

For interchangeable Minigrid™ modules please see page j18.

deco PLUS™

Unfurnished Plates - MiniGrid™

DP**401 1 Gang MiniGrid™ Unfurnished Plate - 1 Aperture
DP**402 1 Gang MiniGrid™ Unfurnished Plate - 2 Apertures
DP**403 1 Gang MiniGrid™ Unfurnished Plate - 3 Apertures
DP**404 2 Gang MiniGrid™ Unfurnished Plate - 2 x 2 Apertures
DP**406 2 Gang MiniGrid™ Unfurnished Plate - 2 x 3 Apertures
DP**426 2 Gang MiniGrid™ Unfurnished Plate - 6 In-Line Apertures

Architrave Unfurnished Plates - MiniGrid™

DP**471 1 Gang MiniGrid™ Unfurnished Architrave Plate - 1 Aperture
DP**472 2 Gang MiniGrid™ Unfurnished Architrave Plate - 2 Apertures

These plates must be used with the architrave back boxes WA671 / WA672 and can only be flush mounted.

Back Box Depth: Dependant on modules used
Dimensions: **1 Gang:** 88mm x 88mm x 8mm, **2 Gang:** 148mm x 88mm x 8mm,
Single architrave: 35mm x 88mm x 8mm **Twin architrave:** 35mm x 150mm x 8mm

Understanding the code:
DP - Plate Style **BN** - Plate Finish **036** - Product No. **BK** - Insert Colour Please note: AB & BN are only available with black inserts.
AB Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome, **BN** Black Nickel, **SS** Stainless Steel.



401



402



403



471



404



406



472



426



432

deco

See Page m4 for back boxes.

Unfurnished Plates - MiniGrid™

VP**401	1 Gang MiniGrid™ Unfurnished Plate - 1 Aperture
VP**402	1 Gang MiniGrid™ Unfurnished Plate - 2 Apertures
VP**403	1 Gang MiniGrid™ Unfurnished Plate - 3 Apertures
VP**404	2 Gang MiniGrid™ Unfurnished Plate - 2 x 2 Apertures
VP**406	2 Gang MiniGrid™ Unfurnished Plate - 2 x 3 Apertures
VP**426	2 Gang MiniGrid™ Unfurnished Plate - 6 In-Line Apertures
VP**432	2 Gang MiniGrid™ Unfurnished Plate - 3 Apertures

Architrave Unfurnished Plates - MiniGrid™

VP**471	1 Gang MiniGrid™ Unfurnished Architrave Plate - 1 Aperture
VP**472	2 Gang MiniGrid™ Unfurnished Architrave Plate - 2 Apertures

These plates must be used with the dedicated architrave back boxes WA571/ WA572 and can only be flush mounted. See page m4

Please note 432 is not available in BN, BR, PN, SB or GCBR. See range of MiniGrid™ Modules in the MiniGrid™ section

Back Box Depth: Dependant on modules used
Dimensions: 1 Gang: (88mm x 88mm x 8mm), **2 Gang:** (146mm x 88mm x 8mm),
471: 35mm x 89mm x 8mm, **472:** 35mm x 152mm x 8mm

Understanding the code:
VP - Plate Style **BN** - Plate Finish **011** - Product No. **Please note:** Antique Brass and Black Nickel are only available with black inserts.
AB Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome, **BN** Black Nickel, **SS** Stainless Steel, **PN** Pearl Nickel, **GCBR** Georgian Style



401



402



403



404



406



426

Define® plates are coated stainless steel.

define®

Unfurnished Plates - MiniGrid™

FP**401	1 Gang MiniGrid™ Unfurnished Plate - 1 Aperture
FP**402	1 Gang MiniGrid™ Unfurnished Plate - 2 Apertures
FP**403	1 Gang MiniGrid™ Unfurnished Plate - 3 Apertures
FP**404	2 Gang MiniGrid™ Unfurnished Plate - 2 x 2 Apertures
FP**406	2 Gang MiniGrid™ Unfurnished Plate - 2 x 3 Apertures
FP**426	2 Gang MiniGrid™ Unfurnished Plate - 6 In-Line Apertures

Back Box Depth: Dependant on modules used
Dimensions: **1 Gang:** (88mm x 88mm x 1.3mm*), **2 Gang:** (146mm x 88mm x 1.3mm*) *Excluding gasket

Understanding the code:
FP - Plate Style **BN** - Plate Finish **011** - Product No. **BK** - Insert Colour
BS Brushed Stainless, **BN** Black Nickel, **PN** Pearl Nickel, **CH** Polished Chrome and **SS** Stainless Steel



SIN401 | SCP401



SIN402 | SCP402



SIN403 | SCP403



SIN406 | SCP406



SIN426 | SCP426

definity™

Unfurnished Plate Inserts

SIN401	1 Gang MiniGrid™ Unfurnished Plate Insert - 1 Aperture
SIN402	1 Gang MiniGrid™ Unfurnished Plate Insert - 2 Apertures
SIN403	1 Gang MiniGrid™ Unfurnished Plate Insert - 3 Apertures
SIN404	2 Gang MiniGrid™ Unfurnished Plate Insert - 2 x 2 Apertures
SIN406	2 Gang MiniGrid™ Unfurnished Plate Insert - 2 x 3 Apertures
SIN426	2 Gang MiniGrid™ Unfurnished Plate Insert - 6 In-Line Apertures

Unfurnished Plate Cover Plates

SCP401	1 Gang MiniGrid™ Cover Plate - 1 Aperture
SCP402	1 Gang MiniGrid™ Cover Plate - 2 Apertures
SCP403	1 Gang MiniGrid™ Cover Plate - 3 Apertures
SCP404	2 Gang MiniGrid™ Cover Plate - 2 x 2 Apertures
SCP406	2 Gang MiniGrid™ Cover Plate - 2 x 3 Apertures
SCP426	2 Gang MiniGrid™ Cover Plate - 6 In-Line Apertures

Back Box Depth: Dependant on modules used
Dimensions: **1 Gang:** (86mm x 86mm x 4mm), **2 Gang:** (146mm x 86mm x 4mm)

Understanding the code:
SIN - Insert Prefix **036** - Product No. **BK** - Insert Colour **SS** - 'INGOT' Switch Finish (if applicable)
SCP - Definity Cover Plate Prefix **436** - Product No **SS** - Plate Colour.
BS Brushed Stainless, **CH** Polished Chrome, **SS** Stainless Steel, **PW** White, **BK** Black




CMA401AG



CMA402AG



CMA403AG

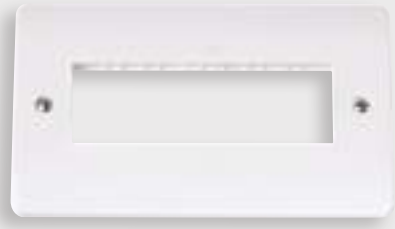

CMA426



CMA406

MODE®

Unfurnished Plates - MiniGrid™

CMA401	1 Gang MiniGrid™ Unfurnished Plate - 1 Aperture
CMA402	1 Gang MiniGrid™ Unfurnished Plate - 2 Apertures
CMA403	1 Gang MiniGrid™ Unfurnished Plate - 3 Apertures
CMA404	2 Gang MiniGrid™ Unfurnished Plate - 2 x 2 Apertures
CMA406	2 Gang MiniGrid™ Unfurnished Plate - 2 x 3 Apertures
CMA426	2 Gang MiniGrid™ Unfurnished Plate - 6 In-Line Apertures
CMA432	2 Gang MiniGrid™ Unfurnished Plate - 3 Apertures

Switch modules interchangeable with Minigrid™ modules in Polar™ white (PW) finish.

Part M Range™

Unfurnished Plates - MiniGrid™

CMA401AG	1 Gang MiniGrid™ Unfurnished Plate - 1 Aperture
CMA402AG	1 Gang MiniGrid™ Unfurnished Plate - 2 Apertures
CMA403AG	1 Gang MiniGrid™ Unfurnished Plate - 3 Apertures
CMA404AG	2 Gang MiniGrid™ Unfurnished Plate - 2 x 2 Apertures
CMA426AG	2 Gang MiniGrid™ Unfurnished Plate - 6 In-Line Apertures

ANTIMICROBIAL PRODUCTS

Back Box Depth: Dependant on modules used
Dimensions: **1 Gang:** (86mm x 86mm x 9.5mm), **2 Gang:** (146mm x 86mm x 9.5mm)



PRW401



PRW402



PRW403



PRW404



PRW406



PRW426



PRW432

polar™

Unfurnished Plates - MiniGrid™

PRW401	1 Gang MiniGrid™ Unfurnished Plate - 1 Aperture
PRW402	1 Gang MiniGrid™ Unfurnished Plate - 2 Apertures
PRW403	1 Gang MiniGrid™ Unfurnished Plate - 3 Apertures
PRW404	2 Gang MiniGrid™ Unfurnished Plate - 2 x 2 Apertures
PRW406	2 Gang MiniGrid™ Unfurnished Plate - 2 x 3 Apertures
PRW426	2 Gang MiniGrid™ Unfurnished Plate - 6 In-Line Apertures
PRW432	2 Gang MiniGrid™ Unfurnished Plate - 3 Apertures

PRW plates utilise Polar™ white (PW) finished Minigrid™ modules.

Back Box Depth: Dependant on modules used
Dimensions: **1 Gang:** (86mm x 86mm x 11mm), **2 Gang:** (146mm x 86mm x 11mm)

ANTIMICROBIAL PRODUCTS



CL401



CL402



CL403



CL404



CL406



CL426

essentials™

Unfurnished Plates - MiniGrid™

CL401 1 Gang MiniGrid™ Unfurnished Plate - 1 Aperture
CL402 1 Gang MiniGrid™ Unfurnished Plate - 2 Apertures
CL403 1 Gang MiniGrid™ Unfurnished Plate - 3 Apertures
CL404 2 Gang MiniGrid™ Unfurnished Plate - 2 x 2 Apertures
CL406 2 Gang MiniGrid™ Unfurnished Plate - 2 x 3 Apertures
CL426 2 Gang MiniGrid™ Unfurnished Plate - 6 In-Line Apertures

CL plates utilise WH finished Minigrid™ modules.

Back Box Depth: 40mm Minimum
Dimensions: **1 Gang:** (80mm x 80mm), **2 Gang:** (146mm x 80mm), Knock-outs: 20mm



WA401RD



WA402RD



WA403RD

essentials™

Unfurnished Plates - MiniGrid™

WA401RD 1 Gang MiniGrid™ Unfurnished Plate - 1 Aperture
WA402RD 1 Gang MiniGrid™ Unfurnished Plate - 2 Apertures
WA403RD 1 Gang MiniGrid™ Unfurnished Plate - 3 Apertures

Back Box Depth: Dependant on modules used
Dimensions: **1 Gang:** (86mm x 86mm x 11mm), **2 Gang:** (146mm x 86mm x 11mm)

Minigrid™ Modules

The Minigrid™ modules illustrated on the following pages are all easily and quickly exchanged or mounted onto unfurnished plates by means of a simple single screw fixing.







IN HOUSE LASER ETCHING

Our in house laser printer provides flexibility to suit large volume batch or custom jobs. The precision, permanent, fine marking effect is customisable, offering you and your customers a wider variety of options.



MD001WH



MD001
(Back)



MD002BR



MD002
(Back)

Conventional moulded 1 way, 2 way and intermediate switch modules can be used in all Click® accessories, Polar™ and Mode® moulded and metal ranges.

10AX 1 Way Switch Modules

MD001BK	1 Way Switch Module - Black
MD001PW	1 Way Switch Module - Polar™ White
MD001WH	1 Way Switch Module - Click® White

10AX 2 Way Switch Modules

MD002BK	2 Way Switch Module - Black
MD002PW	2 Way Switch Module - Polar™ White
MD002WH	2 Way Switch Module - Click® White
MD002RD	2 Way Switch Module - Red

Ingot 10AX 2 Way Switch Modules

MD002AB	Ingot 2 Way Switch Module - Antique Brass
MD002BN	Ingot 2 Way Switch Module - Black Nickel
MD002BR	Ingot 2 Way Switch Module - Polished Brass
MD002BS	Ingot 2 Way Switch Module - Brushed Stainless
MD002CH	Ingot 2 Way Switch Module - Polished Chrome
MD002PN	Ingot 2 Way Switch Module - Pearl Nickel
MD002SB	Ingot 2 Way Switch Module - Satin Brass
MD002SC	Ingot 2 Way Switch Module - Satin Chrome
MD002SS	Ingot 2 Way Switch Module - Stainless Steel

Standards: BS EN 60669
Module Depth: 20mm Minimum **Cable Size:** 4 x 1.5mm² / 2 x 2.5mm² / 1 x 6mm² Maximum



MD028PW



MD028AB



MD028BR



MD028SS



MD028
(Back)



MD028BS



MD028CH



MD028SB

Conventional moulded 1 way, 2 way and intermediate switch modules can be used in all Click® accessories, Polar™ and Mode® moulded and metal ranges.

10AX Intermediate Switch Modules

MD028BK	Intermediate Switch Module - Black
MD028PW	Intermediate Switch Module - Polar™ White
MD028WH	Intermediate Switch Module - Click® White

Ingot 10AX Intermediate Switch Modules

MD028AB	Intermediate Switch Module - Antique Brass
MD028BN	Intermediate Switch Module - Black Nickel
MD028BR	Intermediate Switch Module - Polished Brass
MD028BS	Intermediate Switch Module - Brushed Stainless
MD028CH	Intermediate Switch Module - Polished Chrome
MD028PN	Intermediate Switch Module - Pearl Nickel
MD028SB	Intermediate Switch Module - Satin Brass
MD028SC	Intermediate Switch Module - Satin Chrome
MD028SS	Intermediate Switch Module - Stainless Steel

Standards: BS EN 60669
Module Depth: 20mm Minimum **Cable Size:** 4 x 1.5mm² / 2 x 2.5mm² / 1 x 6mm² Maximum



MD038PW



MD038BK



MD038BK



MD009SC



MD009BR



MD009PN



MD009BK

Ingot modules offer metallic finish to switch modules which match each of our decorative plate finishes.

10AX 2 Way Intermediate Paddle Switch Modules (Triple Width)

MD038BK	Intermediate Switch Module - Black
MD038PW	Intermediate Switch Module - Polar™ White
MD038WH	Intermediate Switch Module - Click® White

10AX 2 Way Paddle Switch Modules (Triple Width)

MD009BK	2 Way Paddle Switch Module - Black
MD009PW	2 Way Paddle Switch Module - Polar™ White
MD009WH	2 Way Paddle Switch Module - Click® White

Ingot 10AX 2 Way Paddle Switch Modules (Triple Width)

MD009AB	2 Way Paddle Switch Module - Antique Brass
MD009BN	2 Way Paddle Switch Module - Black Nickel
MD009BR	2 Way Paddle Switch Module - Polished Brass
MD009BS	2 Way Paddle Switch Module - Brushed Stainless
MD009CH	2 Way Paddle Switch Module - Polished Chrome
MD009PN	2 Way Paddle Switch Module - Pearl Nickel
MD009SB	2 Way Paddle Switch Module - Satin Brass
MD009SC	2 Way Paddle Switch Module - Satin Chrome
MD009SS	2 Way Paddle Switch Module - Stainless Steel

Standards: BS EN 60669
Module Depth: 20mm **Cable Size:** 4 x 1.5mm² / 2 x 2.5mm² / 1 x 6mm² Maximum



MD004
(Back)



MD004WH



MD004SB



MD004SS

2 way retractive switches offer “push-to-make” and “push-to-break”. MD004 retractive switch modules are suitable for use with the Click® Smart wiring accessory range. Ingot modules offer metallic finish to switch modules which match each of our decorative plate finishes.

10AX 2 Way Retractive Switch Modules

MD004BK	2 Way Retractive Switch Module - Black
MD004PW	2 Way Retractive Switch Module - Polar™ White
MD004WH	2 Way Retractive Switch Module - Click® White

Ingot 10AX 2 Way Retractive Switch Modules

MD004AB	2 Way Retractive Switch Module - Antique Brass
MD004BN	2 Way Retractive Switch Module - Black Nickel
MD004BR	2 Way Retractive Switch Module - Polished Brass
MD004BS	2 Way Retractive Switch Module - Brushed Stainless
MD004CH	2 Way Retractive Switch Module - Polished Chrome
MD004PN	2 Way Retractive Switch Module - Pearl Nickel
MD004SB	2 Way Retractive Switch Module - Satin Brass
MD004SC	2 Way Retractive Switch Module - Satin Chrome
MD004SS	2 Way Retractive Switch Module - Stainless Steel

Standards: BS EN 60669
Module Depth: 20mm **Cable Size:** 4 x 1.5mm² / 2 x 2.5mm² / 1 x 6mm² Maximum



MD018WH



MD018BK



MD018BN-WM



MD018BK-TD



MD018PW-CH



MD018BR-DW



MD018RD



MD018
(Back)

IN HOUSE LASER ETCHING
Our in house laser printer provides flexibility to suit large volume batch or custom jobs.
The precision, permanent, fine marking effect is customisable, offering you and your customers a wider variety of options.

10AX 13A DP Resistive Switch Modules

MD018BK	DP Switch Module - Black
MD018PW	DP Switch Module - Polar™ White
MD018RD	DP Switch Module - Red
MD018WH	DP Switch Module - Click® White

Ingot 10AX 13A DP Resistive Switch Modules

MD018AB	DP Switch Module - Antique Brass
MD018BN	DP Switch Module - Black Nickel
MD018BR	DP Switch Module - Polished Brass
MD018BS	DP Switch Module - Brushed Stainless
MD018CH	DP Switch Module - Polished Chrome
MD018PN	DP Switch Module - Pearl Nickel
MD018SB	DP Switch Module - Satin Brass
MD018SC	DP Switch Module - Satin Chrome
MD018SS	DP Switch Module - Stainless Steel

The MD018 modules listed are available with the following laser etched legends:

-WM	Washing Machine	-HB	Hob
-FD	Fridge	-MW	Microwave
-TD	Tumble Dryer	-BL	Boiler
-FZ	Freezer	-WD	Waste Disposal
-FF	Fridge Freezer	-OV	Oven
-FN	Fan	-CH	Cooker Hood
-DW	Dishwasher	-WH	Water Heater

Suffix the two letters to complete the product code with legend eg. **MD018CH-FN**

Standards: BS EN 60669
Module Depth: 20mm **Cable Size:** 4 x 1.5mm² / 2 x 2.5mm² / 1 x 6mm² Maximum

Understanding the code:
MD - Module Style **536** - Product No **BN** - Module Finish **-WM** - Legend Style



MD003SB



MD003WH



MD003BK



MI003



MD003
(Back)



MD003CH



MD003BN

10AX 2 Way Keyswitch Modules

MD003BK	2 Way Keyswitch Module - Black
MD003PW	2 Way Keyswitch Module - Polar™ White
MD003WH	2 Way Keyswitch Module - Click® White

Ingot 10AX 2 Way Keyswitch Modules

MD003AB	2 Way Keyswitch Module - Antique Brass
MD003BN	2 Way Keyswitch Module - Black Nickel
MD003BR	2 Way Keyswitch Module - Polished Brass
MD003BS	2 Way Keyswitch Module - Brushed Stainless
MD003CH	2 Way Keyswitch Module - Polished Chrome
MD003PN	2 Way Keyswitch Module - Pearl Nickel
MD003SB	2 Way Keyswitch Module - Satin Brass
MD003SC	2 Way Keyswitch Module - Satin Chrome
MD003SS	2 Way Keyswitch Module - Stainless Steel

Spare Key For Keyswitch

MI003	Spare Key For Keyswitch

Standards: BS EN 60669
Module Depth: 20mm **Cable Size:** 4 x 1.5mm² / 2 x 2.5mm² / 1 x 6mm² Maximum



MD029BN



MD029BS



MD029CH



MD029
(Back)



MI003

10AX DP Keyswitch 'Emergency Test' Modules

MD029BK	DP Keyswitch Module 'Emergency Test' - Black
MD029PW	DP Keyswitch Module 'Emergency Test' - Polar™ White
MD029WH	DP Keyswitch Module 'Emergency Test' - Click® White

Ingot 10AX DP Keyswitch 'Emergency Test' Modules

MD029AB	DP Keyswitch Module 'Emergency Test' - Antique Brass
MD029BN	DP Keyswitch Module 'Emergency Test' - Black Nickel
MD029BR	DP Keyswitch Module 'Emergency Test' - Polished Brass
MD029BS	DP Keyswitch Module 'Emergency Test' - Brushed Stainless
MD029CH	DP Keyswitch Module 'Emergency Test' - Polished Chrome
MD029PN	DP Keyswitch Module 'Emergency Test' - Pearl Nickel
MD029SB	DP Keyswitch Module 'Emergency Test' - Satin Brass
MD029SC	DP Keyswitch Module 'Emergency Test' - Satin Chrome
MD029SS	DP Keyswitch Module 'Emergency Test' - Stainless Steel

Spare Key For Keyswitch

MI003	Spare Key For Keyswitch

Standards: BS EN 60669
Module Depth: 20mm **Cable Size:** 4 x 1.5mm² / 2 x 2.5mm² / 1 x 6mm² Maximum



MD046
(Back)



MD046BK



MD046RDTT



MD046PW



MI003

10AX 13A DP Resistive Keyswitch Modules

MD046BK	DP Keyswitch Module - Black
MD046PW	DP Keyswitch Module - Polar™ White
MD046RD	DP Keyswitch Module - Red
MD046WH	DP Keyswitch Module - Click® White
MD046RDTT	DP Keyswitch Module 'Test' - Red

Ingot 10AX 13A DP Resistive Keyswitch Modules

MD046AB	DP Keyswitch Module - Antique Brass
MD046BN	DP Keyswitch Module - Black Nickel
MD046BR	DP Keyswitch Module - Polished Brass
MD046BS	DP Keyswitch Module - Brushed Stainless
MD046CH	DP Keyswitch Module - Polished Chrome
MD046PN	DP Keyswitch Module - Pearl Nickel
MD046SB	DP Keyswitch Module - Satin Brass
MD046SC	DP Keyswitch Module - Satin Chrome
MD046SS	DP Keyswitch Module - Stainless Steel

Spare Key For Keyswitch

MI003	Spare Key For Keyswitch

Standards: BS EN 60669
Module Depth: 20mm **Cable Size:** 4 x 1.5mm² / 2 x 2.5mm² / 1 x 6mm² Maximum



MD008BK



MD008PW



MD008BR



MD008
(Back)



MD280



MD281



MD282



MD282
(Back)

Blank Modules

MD008BK	Blank Module - Black
MD008PW	Blank Module - Polar™ White
MD008WH	Blank Module - Click® White

Ingot Blank Modules

MD008AB	Blank Module - Antique Brass
MD008BN	Blank Module - Black Nickel
MD008BR	Blank Module - Polished Brass
MD008BS	Blank Module - Brushed Stainless
MD008CH	Blank Module - Polished Chrome
MD008PN	Blank Module - Pearl Nickel
MD008SB	Blank Module - Satin Brass
MD008SC	Blank Module - Satin Chrome
MD008SS	Blank Module - Stainless Steel

Indicator Modules

MD280	240V Red Indicator Module
MD281	240V Amber Indicator Module
MD282	240V Green Indicator Module

Standards: BS EN 60669
Module Depth: 20mm **Cable Size:** 4 x 1.5mm² / 2 x 2.5mm² / 1 x 6mm² Maximum



MD047PW



MD047BK



MD047BKBN



MD047BKCH



MD047
(Back)



MD047RD



MD047WHAB



MD047BKSC

13A Fused FCU Modules

MD047BK	13A Fused FCU Module - Black
MD047PW	13A Fused FCU Module - Polar™ White
MD047RD	13A Fused FCU Module - Red
MD047WH	13A Fused FCU Module - Click® White

Ingot 13A Fused Connection Unit Modules

MD047BKAB	FCU Module - Antique Brass
MD047BKBN	FCU Module - Black Nickel
MD047BKBR	FCU Module - Polished Brass
MD047BKBS	FCU Module - Brushed Stainless
MD047BKCH	FCU Module - Polished Chrome
MD047BKPN	FCU Module - Pearl Nickel
MD047BKSB	FCU Module - Satin Brass
MD047BKSC	FCU Module - Satin Chrome
MD047BKSS	FCU Module - Stainless Steel
MD047WHBR	FCU Module - Polished Brass
MD047WHBS	FCU Module - Brushed Stainless
MD047WHCH	FCU Module - Polished Chrome
MD047WHPN	FCU Module - Pearl Nickel
MD047WHSB	FCU Module - Satin Brass
MD047WHSC	FCU Module - Satin Chrome
MD047WHSS	FCU Module - Stainless Steel

Standards: BS 1362 (fuse)
Module Depth: 25.2mm **Cable Size:** 4 x 1.5mm² / 2 x 2.5mm² / 1 x 6mm² Maximum



MD017BK



MD017PW



MD017BKCH



MD017BKPN



MD017BKSS



MD017WHPN



MD017WHSS



MD017
(Back)

Ingot 20A Flex Outlet Modules

MD017BKAB	Flex Outlet Module - Antique Brass
MD017BKBN	Flex Outlet Module - Black Nickel
MD017BKBR	Flex Outlet Module - Polished Brass
MD017BKBS	Flex Outlet Module - Brushed Stainless
MD017BKCH	Flex Outlet Module - Polished Chrome
MD017BKPN	Flex Outlet Module - Pearl Nickel
MD017BKSB	Flex Outlet Module - Satin Brass
MD017BKSC	Flex Outlet Module - Satin Chrome
MD017BKSS	Flex Outlet Module - Stainless Steel
MD017WHBR	Flex Outlet Module - Polished Brass
MD017WHBS	Flex Outlet Module - Brushed Stainless
MD017WHCH	Flex Outlet Module - Polished Chrome
MD017WHPN	Flex Outlet Module - Pearl Nickel
MD017WHSB	Flex Outlet Module - Satin Brass
MD017WHSC	Flex Outlet Module - Satin Chrome
MD017WHSS	Flex Outlet Module - Stainless Steel

Complete with cord restraint, live and neutral terminals.

20A Flex Outlet Modules

MD017BK	Flex Outlet Module - Black
MD017PW	Flex Outlet Module - Polar™ White
MD017WH	Flex Outlet Module - Click® White

Standards: BS EN 5733
Module Depth: 30mm **Cable Size:** 4 x 1.5mm² / 2 x 2.5mm² / 1 x 6mm² Maximum
Dimensions: Flex outlet dia.: 11mm



MD005
(Back)



MD005BK



MD005AB



MD005WH

10AX 1 Way Retractive 'Bell' Switch Modules

MD005BK	1 Way Retractive Switch Module 'Bell' - Black
MD005PW	1 Way Retractive Switch Module 'Bell' - Polar™ White
MD005WH	1 Way Retractive Switch Module 'Bell' - Click® White

Ingot 10AX 1 Way Retractive 'Bell' Switch Modules

MD005AB	1 Way Retractive Switch Module 'Bell' - Antique Brass
MD005BN	1 Way Retractive Switch Module 'Bell' - Black Nickel
MD005BR	1 Way Retractive Switch Module 'Bell' - Polished Brass
MD005BS	1 Way Retractive Switch Module 'Bell' - Brushed Stainless
MD005CH	1 Way Retractive Switch Module 'Bell' - Polished Chrome
MD005PN	1 Way Retractive Switch Module 'Bell' - Pearl Nickel
MD005SB	1 Way Retractive Switch Module 'Bell' - Satin Brass
MD005SC	1 Way Retractive Switch Module 'Bell' - Satin Chrome
MD005SS	1 Way Retractive Switch Module 'Bell' - Stainless Steel

Standards: BS EN 60669 MD280-82: BS 5733
Module Depth: 20mm **Cable Size:** 4 x 1.5mm² / 2 x 2.5mm² / 1 x 6mm² Maximum



MD070PW



MD070BK



MD070AB



MD070BN



MD070BR



MD070BS



MD070CH



MD070
(Back)

All 3 position switches feature a central off position.

10A 3 Position Switch Modules

MD070BK	3 Position Switch Module - Black
MD070PW	3 Position Switch Module - Polar™ White
MD070WH	3 Position Switch Module - Click® White

Ingot 10A 3 Position Switch Modules

MD070AB	3 Position Switch Module - Antique Brass
MD070BN	3 Position Switch Module - Black Nickel
MD070BR	3 Position Switch Module - Polished Brass
MD070BS	3 Position Switch Module - Brushed Stainless
MD070CH	3 Position Switch Module - Polished Chrome
MD070PN	3 Position Switch Module - Pearl Nickel
MD070SB	3 Position Switch Module - Satin Brass
MD070SC	3 Position Switch Module - Satin Chrome
MD070SS	3 Position Switch Module - Stainless Steel

Standards: BS EN 60669
Module Depth: 27mm **Cable Size:** 4 x 1.5mm² / 2 x 2.5mm² / 1 x 6mm² Maximum



MD075PW



MD075BK



MD075AB



MD075BN



MD075
(Back)



MD075BS



MD075CH



MD075PN

3 position retractive switches are “push-to-make” and feature a central off position.

10A 3 Position Retractive Switch Modules

MD075BK	3 Position Retractive Switch Module - Black
MD075PW	3 Position Retractive Switch Module - Polar™ White
MD075WH	3 Position Retractive Switch Module - Click® White

Ingot 10A 3 Position Retractive Switch Modules

MD075AB	3 Position Retractive Switch Module - Antique Brass
MD075BN	3 Position Retractive Switch Module - Black Nickel
MD075BR	3 Position Retractive Switch Module - Polished Brass
MD075BS	3 Position Retractive Switch Module - Brushed Stainless
MD075CH	3 Position Retractive Switch Module - Polished Chrome
MD075PN	3 Position Retractive Switch Module - Pearl Nickel
MD075SB	3 Position Retractive Switch Module - Satin Brass
MD075SC	3 Position Retractive Switch Module - Satin Chrome
MD075SS	3 Position Retractive Switch Module - Stainless Steel

Standards: BS EN 60669
Module Depth: 27mm **Cable Size:** 4 x 1.5mm² / 2 x 2.5mm² / 1 x 6mm² Maximum



MD020WH



MD020BK



MD020AB



MD020
(Back)



MD220BK



MD220PW



MD220
(Back)

10A 3 Pole Fan Isolation Modules (Twin Width)

MD020BK	3 Pole Fan Isolation Switch Module - Black
MD020PW	3 Pole Fan Isolation Switch Module - Polar™ White
MD020WH	3 Pole Fan Isolation Switch Module - Click® White

Ingot 10A 3 Pole Fan Isolation Modules (Twin Width)

MD020AB	3 Pole Fan Isolation Switch Module - Antique Brass
MD020BN	3 Pole Fan Isolation Switch Module - Black Nickel
MD020BR	3 Pole Fan Isolation Switch Module - Polished Brass
MD020BS	3 Pole Fan Isolation Switch Module - Brushed Stainless
MD020CH	3 Pole Fan Isolation Switch Module - Polished Chrome
MD020PN	3 Pole Fan Isolation Switch Module - Pearl Nickel
MD020SB	3 Pole Fan Isolation Switch Module - Satin Brass
MD020SC	3 Pole Fan Isolation Switch Module - Satin Chrome
MD020SS	3 Pole Fan Isolation Switch Module - Stainless Steel

10A 3 Pole Lockable Fan Isolation Modules (Twin Width)

MD220BK	3 Pole Lockable Fan Switch Module - Black
MD220PW	3 Pole Lockable Fan Switch Module - Polar™ White
MD220WH	3 Pole Lockable Fan Switch Module - Click® White

Standards: BS EN 60669
Module Depth: 22mm **Cable Size:** 4 x 1.5mm² / 2 x 2.5mm² / 1 x 6mm² Maximum



MD024
(Back)



MD024CH



MD024SS



MD024BS



MD032
(Back)



MD032SC



MD032PW



MD032WH

20A 2 Way Switch Modules (Twin Width)

MD024BK	2 Way Switch Module - Black
MD024PW	2 Way Switch Module - Polar™ White
MD024WH	2 Way Switch Module - Click® White

Ingot 20A 2 Way Switch Modules (Twin Width)

MD024BN	2 Way Switch Module - Black Nickel
MD024BS	2 Way Switch Module - Brushed Stainless
MD024CH	2 Way Switch Module - Polished Chrome
MD024SC	2 Way Switch Module - Satin Chrome
MD024SS	2 Way Switch Module - Stainless Steel

32A DP Switch Modules (Twin Width)

MD032BK	DP Switch Module - Black
MD032PW	DP Switch Module - Polar™ White
MD032WH	DP Switch Module - Click® White

Ingot 32A DP Switch Modules (Twin Width)

MD032BN	DP Switch Module - Black Nickel
MD032BS	DP Switch Module - Brushed Stainless
MD032CH	DP Switch Module - Polished Chrome
MD032SC	DP Switch Module - Satin Chrome
MD032SS	DP Switch Module - Stainless Steel

Standards: BS EN 60669
Module Depth: 22mm
Cable Size: 4 x 1.5mm² / 2 x 2.5mm² / 1 x 6mm² Maximum **MD024:** 4 x 1.5mm2, 2 x 2.5mm2, **MD032:** 4 x 2.5mm2, 2 x 4mm2



MD022BK



MD022CH



MD022BR-WM



MD022BS-BL



MD022CH-CH



MD022PN-FF



MD022SB-TD



MD022
(Back)

IN HOUSE LASER ETCHING
Our in house laser printer provides flexibility to suit large volume batch or custom jobs.
The precision, permanent, fine marking effect is customisable, offering you and your customers a wider variety of options.

20A DP Switch Modules (Twin Width)

MD022BK	DP Switch Module - Black
MD022PW	DP Switch Module - Polar™ White
MD022WH	DP Switch Module - Click® White

Ingot 20A DP Switch Modules (Twin Width)

MD022AB	DP Switch Module - Antique Brass
MD022BN	DP Switch Module - Black Nickel
MD022BR	DP Switch Module - Polished Brass
MD022BS	DP Switch Module - Brushed Stainless
MD022CH	DP Switch Module - Polished Chrome
MD022PN	DP Switch Module - Pearl Nickel
MD022SB	DP Switch Module - Satin Brass
MD022SC	DP Switch Module - Satin Chrome
MD022SS	DP Switch Module - Stainless Steel

The MD022 modules listed are available with the following laser etched legends:

-WM	Washing Machine	-HB	Hob
-FD	Fridge	-MW	Microwave
-TD	Tumble Dryer	-BL	Boiler
-FZ	Freezer	-WD	Waste Disposal
-FF	Fridge Freezer	-OV	Oven
-FN	Fan	-CH	Cooker Hood
-DW	Dishwasher	-WH	Water Heater

Suffix the two letters to complete the product code with legend eg. **MD022CH-FN**

Standards: BS EN 60669
Module Depth: 22mm Minimum **Cable Size:** 4 x 1.5mm² / 2 x 2.5mm² / 1 x 6mm² Maximum

Understanding the code:
MD - Module Style **536** - Product No **BN** - Module Finish **-WM** - Legend Style



MD023BK



MD023CH



MD023BR-WM



MD023BS-BL



MD023
(Back)



MD023PN-FF



MD023SB-TD



MD023WH-WD

IN HOUSE LASER ETCHING
Our in house laser printer provides flexibility to suit large volume batch or custom jobs.
The precision, permanent, fine marking effect is customisable, offering you and your customers a wider variety of options.

20A DP Switch Modules With Neon (Twin Width)

MD023BK	DP Switch With Neon Module - Black
MD023PW	DP Switch With Neon Module - Polar™ White
MD023WH	DP Switch With Neon Module - Click® White

Ingot 20A DP Switch Modules With Neon (Twin Width)

MD023AB	DP Switch With Neon Module - Antique Brass
MD023BN	DP Switch With Neon Module - Black Nickel
MD023BR	DP Switch With Neon Module - Polished Brass
MD023BS	DP Switch With Neon Module - Brushed Stainless
MD023CH	DP Switch With Neon Module - Polished Chrome
MD023PN	DP Switch With Neon Module - Pearl Nickel
MD023SB	DP Switch With Neon Module - Satin Brass
MD023SC	DP Switch With Neon Module - Satin Chrome
MD023SS	DP Switch With Neon Module - Stainless Steel

The MD023 modules listed are available with the following laser etched legends:

-WM	Washing Machine	-HB	Hob
-FD	Fridge	-MW	Microwave
-TD	Tumble Dryer	-BL	Boiler
-FZ	Freezer	-WD	Waste Disposal
-FF	Fridge Freezer	-OV	Oven
-FN	Fan	-CH	Cooker Hood
-DW	Dishwasher	-WH	Water Heater

Suffix the two letters to complete the product code with legend eg. **MD023CH-FN**

Standards: BS EN 60669
Module Depth: 22mm Minimum **Cable Size:** 4 x 1.5mm² / 2 x 2.5mm² / 1 x 6mm² Maximum

Understanding the code:
MD - Module Style **536** - Product No **BN** - Module Finish **-WM** - Legend Style



MD150WH



MD150CH

The Click® dimmer module mounting kit is double aperture size and is suitable for mounting on all existing Minigrid™ blank plates, whether they be moulded or decorative metal plates. Please refer to our dedicated range catalogues for product codes of available plates.

The dimmer module mounting kits comprise a module mount frame, operating knob and innovative nut runner to facilitate the fixing of the locking nut. Locking nut and washer supplied with the Click® dimmer modules.

The decorative operating knob and the mount frame are finished in the same design as the selected wall plates. Equally, they may be mounted on contrasting plate finish to produce a particular decorative effect.



Dimmer Module Not Supplied - See Page j38.
Mounting Nut & Washer Supplied with Dimmer Module

Ingot Dimmer Module Mounting Kits (Twin Width) - Dimmer Modules Not Supplied

MD150AB	Dimmer Module Mounting Kit - Antique Brass
MD150BK	Dimmer Module Mounting Kit - Black
MD150BN	Dimmer Module Mounting Kit - Black Nickel
MD150BR	Dimmer Module Mounting Kit - Polished Brass
MD150BS	Dimmer Module Mounting Kit - Brushed Stainless
MD150CH	Dimmer Module Mounting Kit - Polished Chrome
MD150PN	Dimmer Module Mounting Kit - Pearl Nickel
MD150PW	Dimmer Module Mounting Kit - Polar™ White
MD150SB	Dimmer Module Mounting Kit - Satin Brass
MD150SC	Dimmer Module Mounting Kit - Satin Chrome
MD150SS	Dimmer Module Mounting Kit - Stainless Steel
MD150WH	Dimmer Module Mounting Kit - Click® White

Requires separate ON/OFF switch. This can also be added to the accessory ranges where shown

Module Depth: 13.2mm (without Dimmer)



MD9010



MD9001



MD9022




MD9042



SP900



MD9014



MD9014
(Back)

1 Switch 1 allows the minimum brightness to be adjusted

2 Switch 2 allows the dimming mode to be adjusted

Eliminate dimmer flickering

Our new dimmer is much easier to program than regular dimmers because of the two small switches on the back of the module. This allows the dimmer to be programmed without removing from the plate.

Use the nut runner to easily exchange dimmer modules and create customised dimmer switch plate.

Dimmer Modules

MD9010	1-10V Analogue Dimmer Module (25 x 62mm)
MD9001	6A 2 Way Push On/Off (Non-Dimming) Module (25 x 62mm)
MD9022	250W 2 Way Dimmer Module (25 x 62mm)
MD9042	400W 2 Way Dimmer Module (25 x 62mm)
MD9014	100W Dual Mode Dimmer Module with Trim (26.5 x 55mm) Due to the reduced height, the MD9014 is suitable for mounting directly above each other on multi-tier plates.
SP900	Dimmer M10 Nut Runner Tool

Standards: BS EN 60669, BS EN 55015 **Cable Size:** 2 x 1.5mm²
Back Box Depth: Up to 400W: 25mm **Type:** Leading Edge, **MD9014:** Leading & Trailing Edge
Dimensions: 25.5 x 67 x 23.2mm **MD9014:** 25 x 57.5 x 24.2mm



MD9102AB



MD9102BR



MD9102BN



MD9102
(Back)



MD9125PN



MD9125CH



MD9125BN



MD9125
(Back)

PLEASE NOTE: Toggle modules can only be fitted into existing toggle switch plates

10AX 2 Way Toggle Switch Modules

MD9102AB	2 Way Toggle Switch Module - Antique Brass
MD9102BN	2 Way Toggle Switch Module - Black Nickel
MD9102BR	2 Way Toggle Switch Module - Polished Brass
MD9102CH	2 Way Toggle Switch Module - Polished Chrome
MD9102PN	2 Way Toggle Switch Module - Pearl Nickel

10AX Intermediate Toggle Switch Modules

MD9125AB	Intermediate Toggle Switch Module - Antique Brass
MD9125BN	Intermediate Toggle Switch Module - Black Nickel
MD9125BR	Intermediate Toggle Switch Module - Polished Brass
MD9125CH	Intermediate Toggle Switch Module - Polished Chrome
MD9125PN	Intermediate Toggle Switch Module - Pearl Nickel

Standards: BS EN 60669

New Media™
Plates & Modules





new media™

Solutions for all Manner of Media Cabling Problems

Contents

New Media™ Plates	**k5**
Deco Plus® Unfurnished Plates	**k9**
Deco® Unfurnished Plates	**k10**
Define® Unfurnished Plates	**k11**
Definity™ Unfurnished Plates	**k12**
Mode® Unfrunished Plates	**k13**
Part M™ Unfrunished Plates	**k13**
Polar™ Unfurnished Plates	**k13**
Metal Clad Unfurnished Plates	**k14**
New Media™ Modules	**k16**
Typical Sky+ Installation	**k24**
Typical Sky+ HD Installtion	**k25**
Technical Details	**k26**

The modern home is now more than a mere home. It doubles up occasionally as a cinema, concert hall, meeting venue and computer room etc.. Each of these functions brings with it its own unique requirements in terms of the provision of necessary services such as telephone or satellite sockets etc.

Even in recent memory designers and builders did not think beyond providing a perfunctory level of electrical switches, sockets and pendant light fittings in a new home.

Nowadays, as well as providing an ever increasing number of these items, provision must be made for the myriad different electrical and electronic products which proliferate our homes.



Traditionally, products such as telephone and TV coaxial sockets etc. have all been supplied built into a standard size wall plate. The environment in today's office and home however requires a number of services to be provided to a specific work station or convenient access point. The most flexible and efficient means of doing this is the use of modules on a multiple aperture plate.

The New Media™ range illustrated in the following pages encompasses a wide range of media and power modules, providing the designer and installer a host of solutions for all manner of media cabling problems.



New Media™ Plates

The brief given to our designers charged with the task of developing the New Media™ range was to produce a comprehensive yet flexible and user friendly 'system' which enables the installer to easily create topical media and power cabling solutions.

All of the modules featured in this brochure are of the standard euro grid configuration based on 1 aperture modules of 25 x 50mm. Mounting plates are available as wall or floor plates and can accommodate 1 – 16 modules according to requirements.

Instead of numerous unsightly individual sockets, a single New Media™ plate can be used at a convenient point to bring together any combination of media modules. The individual modules are available in black or white finish and are suitable for mounting on blank plates from selected accessory ranges, namely the Polar™ and Mode® moulded accessory ranges, the Click® metal clad range plus the Deco®, Define® and Definity™ decorative metal ranges.



MP508



MP608





The furnished plates illustrated above contain 6 x 1 aperture and 1 x 2 aperture media modules (above) and 4 x 2 aperture 13A socket outlet modules (above).

New Media™ Back box MP520 required, see page k8.

Small Unfurnished Front Plates - 8 Apertures

MP508AB	Small New Media™ Unfurnished Front Plate - 8 Apertures - Antique Brass
MP508BR	Small New Media™ Unfurnished Front Plate - 8 Apertures - Polished Brass
MP508PN	Small New Media™ Unfurnished Front Plate - 8 Apertures - Pearl Nickel
MP508SB	Small New Media™ Unfurnished Front Plate - 8 Apertures - Satin Brass

The yoke 'MP510' is required to mount the media modules into prior to assembling the frontplate, see page k8.

Small New Media™ Unfurnished Front Plate & Yoke - 8 Apertures

CMA608	Small New Media™ Unfurnished Front Plate & Yoke - 8 Apertures - White
MP608**	Small New Media™ Unfurnished Front Plate & Yoke - 8 Apertures

Back Box Depth: 47mm Minimum
Dimensions: 250mm x 87mm x 8mm **CMA608:** 248mm x 86mm x 9.5mm

Understanding the code:
MP - Plate Style **508** - Product No. **BN** - Plate Finish. **AB** Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome, **BN** Black Nickel, **PN** Pearl Nickel, **BS** Brushed Stainless, **SS** Stainless Steel, **PW** Polar White



MP516



MP616



The furnished plate illustrated above contains 8 single New Media™ modules (top row) and 4 twin width socket outlet modules (bottom row).

The yoke 'MP510' (x2) is required to mount the media modules into prior to assembling the frontplate, see page k8.

Back box MP525 required, see page k8.

Large Unfurnished Front Plates - 2 x 8 Apertures


MP516AB	Large New Media™ Unfurnished Front Plate - 2 x 8 Apertures - Antique Brass
MP516BN	Large New Media™ Unfurnished Front Plate - 2 x 8 Apertures - Black Nickel
MP516BR	Large New Media™ Unfurnished Front Plate - 2 x 8 Apertures - Polished Brass
MP516BS	Large New Media™ Unfurnished Front Plate - 2 x 8 Apertures - Brushed Stainless
MP516CH	Large New Media™ Unfurnished Front Plate - 2 x 8 Apertures - Polished Chrome
MP516PN	Large New Media™ Unfurnished Front Plate - 2 x 8 Apertures - Pearl Nickel
MP516SS	Large New Media™ Unfurnished Front Plate - 2 x 8 Apertures - Stainless Steel

Large New Media™ Unfurnished Front Plate & Yoke - 2 x 8 Apertures


CMA616	Large New Media™ Unfurnished Front Plate & Yokes - 2 x 8 Apertures - White
MP616**	Large New Media™ Unfurnished Front Plate & Yoke - 2 x 8 Apertures

Back Box Depth: 35mm Minimum
Dimensions: 250mm x 216mm x 8mm **CMA616:** 248mm x 214mm x 9.5mm

Understanding the code:
MP - Plate Style **508** - Product No. **BN** - Plate Finish. **AB** Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome, **BN** Black Nickel, **PN** Pearl Nickel, **BS** Brushed Stainless, **SS** Stainless Steel, **PW** Polar White

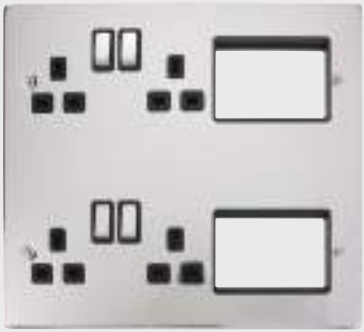

MP606CHBK

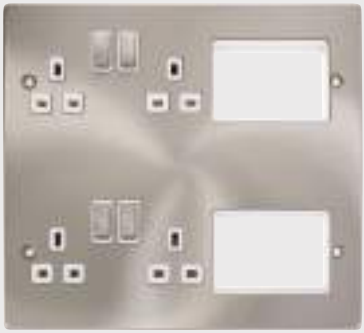

MP606SCWH



MP606PW

All plates supplied with black and white gaskets where applicable.
Product is supplied with 4 x 13A DP switched sockets. Back box MP525 or MP535 required, see following page.

2 Tier Semi-Modular Unfurnished Plates

MP606** Large New Media™ Part Furnished Front Plate - 4 x 13A DP Switched Sockets & 2 x 3 Apertures

***Available in Chrome (CH), Satin Chrome (SC) and Polar™ White (PW)**

Back Box Depth: 35mm Minimum **Cable Sizes:** 13A 4 x 2.5mm
Dimensions: 250mm x 216mm x 8mm

Understanding the code:
MP - Plate Style **508** - Product No. **BN** - Plate Finish. **CH** Polished Chrome, **SC** Satin Chrome, **PW** Polar White



MP525



MP510



MP520

Yoke

MP510 New Media™ Yoke - 8 Apertures

Divider Plates

MP521 Divider Plate 47mm Deep for MP520 (76mm x 44mm)
MP526 Divider Plate 47mm Deep for MP525 (93mm x 44mm)
MP536 Divider Plate 35mm Deep for MP535

Back Boxes

MP520 47mm Deep New Media™ Back Box - 8 Apertures
MP525 47mm Deep New Media™ Back Box With Central Divider - 2 x 8 Apertures
MP535 35mm Deep New Media™ Back Box With Central Divider - 2 x 8 Apertures

Galvanised steel back boxes supplied for flush mounting of media plates. Mounting yoke facilitates pre-assembly of required modules. Fitted with twin earth terminals.

Divider plates can be installed as necessary in order to screen sensitive modules.

Dimensions: MP521: (76mm x 44mm) **MP526:** (93mm x 44mm)
Cutout Sizes: 520: 225mm x 75mm **525:** 225mm x 194mm



DPCH310



DPSB311



DPBN312

Unfurnished Plates - New Media™

DP**310	1 Gang New Media™ Unfurnished Plate - 1 Aperture
DP**311	1 Gang New Media™ Unfurnished Plate - 2 Apertures
DP**312	2 Gang New Media™ Unfurnished Plate - 4 Apertures

Please add 2 letter prefix to identify required finish i.e. DPCH311 for polished chrome.

Back Box Depth: Dependant on modules used
Dimensions: 1 Gang: 88mm x 88mm x 8mm, **2 Gang:** 148mm x 88mm x 8mm,

Understanding the code:
DP - Plate Style **BN** - Plate Finish **311** - Product No.
AB Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome, **BN** Black Nickel, **SS** Stainless Steel.



VPAB310



VPBN311



VPCH312

deco®

Unfurnished Plates - New Media™

VP**310	1 Gang New Media™ Unfurnished Plate - 1 Aperture
VP**311	1 Gang New Media™ Unfurnished Plate - 2 Apertures
VP**312	2 Gang New Media™ Unfurnished Plate - 4 Apertures

Please add 2 letter prefix to identify required finish i.e. VPCH311 for Polished Chrome.

Back Box Depth: 310, 311, 312: Dependant on module used **MP606:** 47mm Minimum
Dimensions: 1 Gang: (88mm x 88mm x 8mm), **2 Gang:** (146mm x 88mm x 8mm)

Understanding the code:
VP - Plate Style **BN** - Plate Finish **311** - Product No. **BK** - Insert Colour. **Please note:** AB & BN are only available with black inserts.
AB Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome,
BN Black Nickel, **SS** Stainless Steel, **PN** Pearl Nickel, **GCBR** Georgian Style.



FPBS310



FPCH311



FPPN312

define®

Unfurnished Plates - New Media™

FP**310	1 Gang New Media™ Unfurnished Plate - 1 Aperture
FP**311	1 Gang New Media™ Unfurnished Plate - 2 Apertures
FP**312	2 Gang New Media™ Unfurnished Plate - 4 Apertures

Please add 2 letter prefix to identify required finish i.e. FPCH311 for polished chrome.

Back Box Depth: 310, 311, 312: Dependant on module used **MP606:** 47mm Minimum
Dimensions: 1 Gang: (88mm x 88mm x 1.3mm*), **2 Gang:** (146mm x 88mm x 1.3mm*) *Excluding gasket


Understanding the code:
FP - Plate Style **BN** - Plate Finish **311** - Product No. **BK** - Insert Colour.
BS Brushed Stainless, **BN** Black Nickel , **PN** Pearl Nickel, **CH** Polished Chrome and **SS** Stainless Steel



SIN310BK



SIN311BK

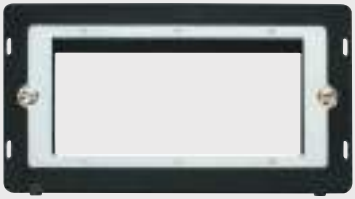

SIN312BK



SCP310CH



SCP311SS



SCP312BS

definity™ Please refer to page “New Media™ Plates” on page e52 for more information.

New Media™ Unfurnished Plate Inserts

SIN310BK 1 Gang New Media™ Unfurnished Plate Insert - 1 Aperture
SIN311BK 1 Gang New Media™ Unfurnished Plate Insert - 2 Apertures
SIN312BK 2 Gang New Media™ Unfurnished Plate Insert - 4 Apertures

New Media™ Cover Plates

SCP310 1 Gang New Media™ Cover Plate - 1 Aperture
SCP311 1 Gang New Media™ Cover Plate - 2 Apertures
SCP312 2 Gang New Media™ Cover Plate - 4 Apertures

Back Box Depth: Dependant on module used **Dimensions: 1 Gang:** (86mm x 86mm x 4mm), **2 Gang:** (146mm x 86mm x 4mm)


Understanding the code:
SIN - Insert Prefix **311** - Product No **BK** - Insert Colour **SS** - ‘INGOT’ Switch Finish (if applicable).
SCP - Definity™ Cover Plate Prefix **311** - Product No **SS** - Plate Colour. Definity™ plates are coated stainless steel
CH Chrome, **SS** Stainless Steel, **BS** Brushed Stainless, **PW** Polar White, **BK** Black, **RD** Red



CMA310



CMA311AG



PRW312

MODE Part M Range™ polar

Mode® Unfurnished Plates - New Media™

CMA310	1 Gang New Media™ Unfurnished Plate - 1 Aperture
CMA311	1 Gang New Media™ Unfurnished Plate - 2 Apertures
CMA312	2 Gang New Media™ Unfurnished Plate - 4 Apertures

Part M™ Range Unfurnished Plates - New Media™

CMA310AG	1 Gang New Media™ Unfurnished Plate - 1 Aperture
CMA311AG	1 Gang New Media™ Unfurnished Plate - 2 Apertures
CMA312AG	2 Gang New Media™ Unfurnished Plate - 4 Apertures

Polar™ Unfurnished Plates - New Media™

PRW310	1 Gang New Media™ Unfurnished Plate - 1 Aperture
PRW311	1 Gang New Media™ Unfurnished Plate - 2 Apertures
PRW312	2 Gang New Media™ Unfurnished Plate - 4 Apertures

ANTIMICROBIAL PRODUCTS


Back Box Depth: Dependant on module used
Dimensions: **Mode® & Part M™: 1 Gang:** (86mm x 86mm x 9.5mm), **2 Gang:** (146mm x 86mm x 9.5mm)
Polar™: 1 Gang: (86mm x 86mm x 11mm), **2 Gang:** (146mm x 86mm x 11mm)




CL311



CL312



FS311SS



FS312SS

essentials™

Unfurnished Plates - New Media™

CL311 1 Gang New Media™ Unfurnished Plate - 2 Apertures
CL312 2 Gang New Media™ Unfurnished Plate - 4 Apertures
Plates Complete With 40mm Deep Back Box
For more Back Boxes see page m22

Unfurnished Floor Plates - For Use With New Media™Modules

FS311SS 1 Gang New Media™ Unfurnished Floor Plate - 2 Apertures
FS312SS 2 Gang New Media™ Unfurnished Floor Plate - 4 Apertures

Back Box Depth: CL311/312: 40mm Minimum **FS311SS/FS312SS:** 35mm Minimum
Dimensions: CL311: 80mm x 80mm x 44mm **CL312:** 140mm x 80mm x 44mm **FS311SS:** 86mm x 93mm **FS312SS:** 146mm x 93mm

New Media™ Modules

The New Media™ modules offer a flexible build solution to a host of individual media transfer requirements. The clip fit grid modules are simple to install in their blank mounting plates.





MM405WH



MM406BK



MM410WH



MM415BK



MM450WH



MM405
(Back)



MM406
(Back)



MM410
(Back)



MM415
(Back)



MM450
(Back)

TV/Satellite Modules - Single Width (25mm x 50mm)

MM405BK	Single Female Satellite Module - Black
MM405WH	Single Female Satellite Module - White
MM406BK	Twin Female Satellite Module (F to F Connection) - Black
MM406WH	Twin Female Satellite Module (F to F Connection) - White
MM410BK	Single Female Coaxial Module - Black
MM410WH	Single Female Coaxial Module - White
MM415BK	Single Male Coaxial Module - Black
MM415WH	Single Male Coaxial Module - White
MM450BK	Blank Module - Black
MM450WH	Blank Module - White

Dimensions: MM405: 25mm x 50mm x 23mm **MM406:** 25mm x 50mm x 15mm
MM410, MM415: 25mm x 50mm x 23.4mm **MM450:** 25mm x 50mm x 14mm



MM420BK



MM425WH



MM430BK



MM440WH



MM420
(Back)



MM425
(Back)



MM430
(Back)



MM440
(Back)

All diplexed, triplexed and quad modules require installation of a signal combining distribution amplifier.
Not suitable for use in the Republic of Ireland.

Media Modules - Twin Width (50mm x 50mm)

MM420BK	Diplexed TV And Radio Module - Black
MM420WH	Diplexed TV And Radio Module - White
MM430BK	Triplexed TV, Radio & Satellite Module - Black
MM430WH	Triplexed TV, Radio & Satellite Module - White
MM440BK	Quad TV, Radio, Sat 1 & Sat 2 Module - Black
MM440WH	Quad TV, Radio, Sat 1 & Sat 2 Module - White

TV/Satellite Modules - Twin Width (50mm x 50mm)

MM425BK	Diplexed TV And Satellite Module - Black
MM425WH	Diplexed TV And Satellite Module - White

Module	Number of Inputs	Number of outputs	Signals on input 1	Signals on input 2
MM420	1	2	TV, Radio	
MM425	1	2	TV, Sat 1	
MM430	1	3	TV, Sat 1, Radio	
MM440	2	4	TV, Sat 1, Radio	Sat 2

Dimensions: 50mm x 50mm x 31.3mm



MM460BK



MM465WH



MM470BK



MM480WH



MM485BK



MM460
(Back)



MM465
(Back)



MM470
(Back)



MM480
(Back)



MM485
(Back)

All New Media™ RJ45 modules are non-screened and are suitable for use with either Type A or Type B wiring conventions.

Telephone/Data Modules - Single Width (25mm x 50mm)

MM460BK	Telephone Master Module - Black
MM460WH	Telephone Master Module - White
MM465BK	Telephone Secondary Module - Black
MM465WH	Telephone Secondary Module - White
MM480BK	RJ45 Cat-5e Module - Black
MM480WH	RJ45 Cat-5e Module - White
MM485BK	RJ45 Cat-6 Module - Black
MM485WH	RJ45 Cat-6 Module - White
MM470BK	RJ11 Module - Black
MM470WH	RJ11 Module - White

Dimensions: MM460, MM465: 25mm x 50mm x 20.2mm **MM470:** 25mm x 50mm x 17.2mm
MM480, MM485: 25mm x 50mm x 18mm



MM002BK



MM022WH



MM023BK



MM025WH



MM047BK



MM002 (Back)



MM022 (Back)



MM023 (Back)



MM025 (Back)



MM047 (Back)

Switch Modules - Single Width (25mm x 50mm)

MM002BK	10AX 2 Way Switch Module - Black
MM002WH	10AX 2 Way Switch Module - White
MM025BK	10AX Intermediate Switch Module - Black
MM025WH	10AX Intermediate Switch Module - White
MM022BK	20A DP Switch Module - Black
MM022WH	20A DP Switch Module - White
MM023BK	20A DP Switch With Neon Module - Black
MM023WH	20A DP Switch With Neon Module - White

13A Fused FCU Modules - Single Width (25mm x 50mm)

MM047BK	13A Fused FCU Module - Black
MM047WH	13A Fused FCU Module - White

Standards: BS EN 60669, 047: BS 1363
Cable Size: 022 / 023: 1 x 6mm² / 3mm x 2.5mm²
Dimensions: 25mm x 50mm x 22mm **MM047:** 25mm x 50mm x 24.7mm



MM010BK



MM020WH



MM030BK



MM033WH



MM038WH



MM515



MM515

Socket Outlet Modules - Twin Width (50mm x 50mm)

MM010BK	13A UK Socket Module - Black
MM010WH	13A UK Socket Module - White
MM020BK	16A European Schuko Socket Module - Black
MM020WH	16A European Schuko Socket Module - White

Not suitable for use with metal clad boxes CL311 and CL312 (40mm).
MM020 requires CL087 (1 gang 50mm) or CL088 (2 gang 50mm) if required.

MM030BK	16A 110V US Socket Module - Black
MM030WH	16A 110V US Socket Module - White
MM033BK	15A Round Pin Socket Module - Black
MM033WH	15A Round Pin Socket Module - White
MM038BK	5A Round Pin Socket Module - Black
MM038WH	5A Round Pin Socket Module - White

USB Charging Modules - Single Width (25mm x 50mm)

MM515	2A USB Charging Module - Black & White

Supplied with black and white frontplates


Standards: 010: BS 1363, **033 & 038:** BS 546, **030:** UL498, **020:** IEC 60884 - SS428 0834
Cable Size: 1 x 6mm² / 3 x 2.5mm² **Dimensions: MM010:** 50mm x 50mm x 25.6mm **MM020:** 50mm x 50mm x 40.1mm
MM030: 50mm x 50mm x 25.5mm **MM033:** 50mm x 50mm x 41mm **MM038:** 25mm x 50mm x 27.1mm
MM515: 25mm x 50mm x 35mm



MM490BK



MM495WH



MM550WH



MM1000



MM490
(Back)



MM495
(Side)



MM501BK

HDMI Outlet with Flexible
Connection (80mm Long)

A versatile 50mm x 50mm euro module LED, which clips into a '311' or '312' New Media™ plate. Utilises a standard wiring accessory back box. Please see page k5 for more information on New Media™ plates.

LED Euromods - Twin Width (50mm x 50mm)

MM1000BL	240V 1W LED Euromod - Blue
MM1000CW	240V 1W LED Euromod - Cool White
MM1000WW	240V 1W LED Euromod - Warm White

Speaker Modules - Single Width (25mm x 50mm)

MM490BK	RCA/Phono Module (2 Outlets) - Black
MM490WH	RCA/Phono Module (2 Outlets) - White
MM495BK	Loudspeaker Module (2 Outlets) - Black
MM495WH	Loudspeaker Module (2 Outlets) - White

TV/Satellite Modules - Single Width (25mm x 50mm)

MM501BK	HDMI With Fly-Lead Module - Black
MM501WH	HDMI With Fly-Lead Module - White

Brush Modules - Single Width (25mm x 50mm)

MM550BK	Single Brush Module - Black (Black Bristles)
MM550WH	Single Brush Module - White (Black Bristles)
MM550WHWH	Single Brush Module - White (White Bristles)



Modular LED stairlight fitted into a Define® New Media™ plate

Design Registration: 002296483

Dimensions: MM490: 25mm x 50mm x 18.3mm **MM495:** 25mm x 50mm x 19.3mm
MM550: 25mm x 50mm x 12.6mm **MM1000:** 50mm x 50mm x 31mm



MM300BK



MM305WH



MM491BK



MM496WH



MM300
(with fly-lead)



MM305
(with fly-lead)



MM491
(Back)



MM496
(with fly-lead)

Media Modules - Single Width (25mm x 50mm)

MM300BK	USB Throughput With Fly-Lead Module - Black
MM300WH	USB Throughput With Fly-Lead Module - White
MM305BK	VGA With Fly-Lead Module - Black
MM305WH	VGA With Fly-Lead Module - White
MM491BK	Triple RCA Module (With Screw Terminals) - Black
MM491WH	Triple RCA Module (With Screw Terminals) - White
MM496BK	3.5mm Audio Jack With Fly-Lead Module - Black
MM496WH	3.5mm Audio Jack With Fly-Lead Module - White

Dimensions: MM300: 25mm x 50mm x 41mm **MM305:** 25mm x 50mm x 50mm
MM491: 25mm x 50mm x 18.3mm **MM496:** 25mm x 50mm x 38mm



SP620BK



SP620WH



MM620BK



SP620BKSB



SP620WHBS



Full item requires (MM620BK) switch module, (311) unfurnished plate and (SP620) hotel key card cover plate, see listed products below:

Hotel Key Card Switch Module - Twin Width (50mm x 50mm)

MM620BK	10A/6AX Hotel Key Card Timer Switch (Mechanical) Module Only - Black

Blue LED illuminates when the key card is removed and the exit time has elapsed.
Card not supplied. Select cover plate below.

Hotel Key Card Switch Module Covers


SP620BK	Black
SP620BKAB	Black - Antique Brass
SP620BKBN	Black - Black Nickel
SP620BKBR	Black - Polished Brass
SP620BKBS	Black - Brushed Stainless
SP620BKCH	Black - Polished Chrome
SP620BKPN	Black - Pearl Nickel
SP620BKSB	Black - Satin Brass
SP620BKSC	Black - Satin Chrome
SP620BKSS	Black - Stainless Steel

Hotel Key Card Switch Module Covers

SP620MTBK	Black - Matt Black
SP620PW	White - White (Metal)
SP620WH	White - White (Plastic)
SP620WHBR	White - Polished Brass
SP620WHBS	White - Brushed Stainless
SP620WHCH	White - Polished Chrome
SP620WHPN	White - Pearl Nickel
SP620WHSB	White - Satin Brass
SP620WHSC	White - Satin Chrome
SP620WHSS	White - Stainless Steel

Please note requires mounting plate **311 (see from page k9)

Time setting: 10 seconds to 5 minutes
Standards: BS EN 60669
Dimensions: MM620BK: 50mm x 50mm x 32.5mm **Cable size:** 2 x 1.5mm²
Key card not included. Accepts standard room cards: 85.6 x 53.98mm

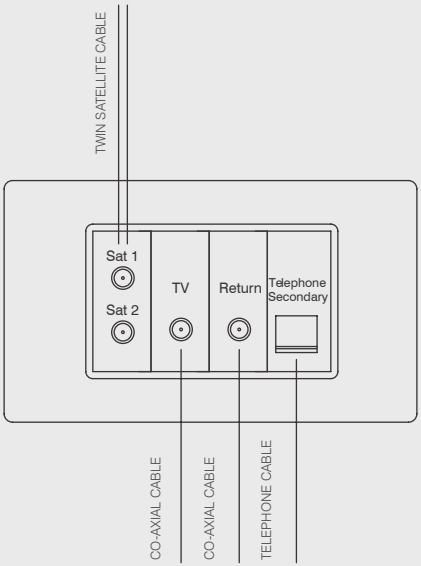


Products Used For This Configuration:

1 x **312	Media Plate
1 x MM406	Twin Satellite Module
1 x MM415	Co-axial Module
1 x MM410	Co-axial Module
1 x MM465	Telephone Secondary Module

Here, the input cables from the satellite dish and the TV aerial are connected directly to the rear of each module.

The return module is provided to allow the Sky signal to be shared throughout the property using a suitable distribution amplifier.

The use of a secondary telephone connection allows for easy connection between the Sky box and the telephone line.

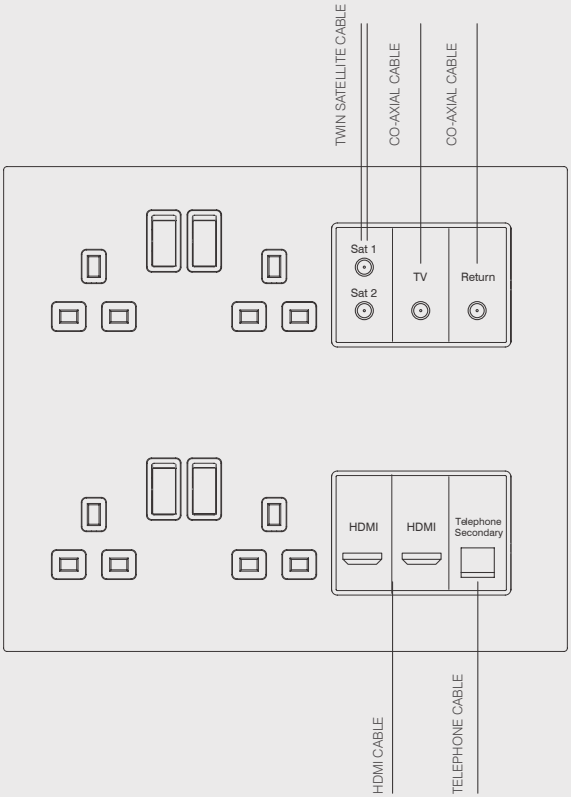

Here, the input cables from the satellite dish and the TV aerial are connected directly to the rear of each module.

The return module is provided to allow the Sky signal to be shared throughout the property using a suitable distribution amplifier.

The use of a secondary telephone connection allows for easy connection between the Sky box and the telephone line.

An HDMI module is provided to facilitate a high definition connection between the Sky box and television.

	MM405	Single 'F' Satellite
Connection	Frequency	Insertion Loss (dB) (Typical)
In to Out	5 to 2300 MHz	1.6
		Power pass to connection

	MM410	Single IEC Female
Connection	Frequency	Insertion Loss (dB) (Typical)
In to Out	5 to 862 MHz	0.3
		Power pass to connection

	MM415	Single IEC Male
Connection	Frequency	Insertion Loss (dB) (Typical)
In to Out	5 to 862 MHz	0.3
		Power pass to connection

	MM420	Diplexed TV & Radio
Connection	Frequency	Insertion Loss (dB) (Typical)
In to Radio	87.5 to 230 MHz	2.0
In to TV	47 to 68 MHz	1.5
In to TV	254 to 862 MHz	2.0
		Power pass to TV

	MM425	Diplexed TV & Satellite
Connection	Frequency	Insertion Loss (dB) (Typical)
In to TV	47 to 862MHz	2.0
In to Satellite	950 to 2150 MHz	2.5
In to Satellite	2150 to 2400 MHz	3.0
		Power pass to satellite

	MM430	Triplexed TV, Radio & Satellite
Connection	Frequency	Insertion Loss (dB) (Typical)
In to Radio	87.5 to 230MHz	3.0
In to TV	47 to 68MHz	2.0
In to TV	254 to 862MHz	2.0
In to Satellite	950 to 2300 MHz	3.0
		Power pass to satellite

	MM440	Quad TV, Radio, Satellite 1 & Satellite 2
Connection	Frequency	Insertion Loss (dB) (Typical)
In to Radio	87.5 to 230MHz	3.0
In to TV	470 to 862MHz	2.5
In to Satellite 1	950 to 2300 MHz	3.0
In to Satellite 2	25 to 2400 MHz	1.5
		Power pass to satellite 1 & satellite 2

curva®

Stylish Electrical Essentials





curva®

The Modern Domestic Wiring Solution

Contents

Switches	I5
Socket Outlets	I8
13A Fused Connection Units	I9
Control Switches	I10
Shaver Socket & Blank Plates	I12
Telephone & Data Sockets	I14
TV & Satellite	I15
Pattress Boxes	I16
Dry Lining Boxes	I17

Moulded white accessories are often described as utilitarian, ie. useful or practical without being attractive.

This is certainly not the case with the Curva® range of smooth profile accessories.

In creating the modern, aesthetically pleasing and ergonomic design of the Curva® range we did not lose sight of the need to produce a true value for money product offering the utmost appeal to installers and end users alike.

Only the best quality raw materials were used in producing this durable, attractive and modern range of accessories which will adorn the walls of all manner of buildings for years to come.



Antimicrobial Certified Products

All white moulded and Mode® Part M™ wiring accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products independently tested achieved a 99.99% kill off rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella and Klebsiella Pneumoniae.

10 YEAR
No Quibble Guarantee

All Click® Curva accessories are covered by our straight forward 'No Quibble Guarantee' against any fault in materials or manufacture experienced at any time within 10 years of the date of supply.



Switches

10AX Plate Switches | Dimmer Switches


The range of Curva® switches described in the following pages has been developed to offer a solution for almost every possible design need and will enhance the décor of any area whether in a kitchen, bedroom, lounge or study etc...



CCA010/CCA011/CCA025



CCA012



CCA013



CCA027



CCA019



CCA105

Plates Switches

CCA010	10AX 1 Gang 1 Way Plate Switch
CCA011	10AX 1 Gang 2 Way Plate Switch
CCA012	10AX 2 Gang 2 Way Plate Switch
CCA013	10AX 3 Gang 2 Way Plate Switch
CCA019	10AX 4 Gang 2 Way Plate Switch
CCA025	10AX 1 Gang Intermediate Plate Switch
CCA027	10AX 1 Gang 1 Way Retractive 'Bell' Switch
CCA105	10AX 6 Gang 2 Way Plate Switch

Standards: BS EN 60669
Back Box Depth: 16mm Minimum **Cable Size:** 4 x 1.5mm² / 2 x 2.5mm² / 1 x 6mm² Maximum
Dimensions: **1 Gang:** (86mm x 86mm x 9.5mm), **2 Gang:** (146mm x 86mm x 9.5mm)



CCA141



CCA142



SP900



MD9014



CCA143



CCA144

MINIGRID®

Switch modules interchangeable with Minigrid™ modules.
We recommend the use of branded halogen lamps with all Curva® dimmers. The use of inferior, non-branded lamps may require the nominal rating of the dimmer to be reduced. These dimmer switches have not been designed for use with LED lamps. However, they may be suitable for some good quality LED lamps. For further information please contact the Click® technical support team.

Dimmer Switches

CCA141	1 Gang 2 Way 250Va Dimmer Switch
CCA142	2 Gang 2 Way 250Va Dimmer Switch
CCA143	3 Gang 2 Way 250Va Dimmer Switch
CCA144	4 Gang 2 Way 250Va Dimmer Switch

Dimmer Modules

MD9010	1-10V Analogue Dimmer Module (25 x 62mm)
MD9001	6A 2 Way Push On/Off (Non-Dimming) Module (25 x 62mm)
MD9022	250W 2 Way Dimmer Module (25 x 62mm)
MD9042	400W 2 Way Dimmer Module (25 x 62mm)
MD9014	100W Dual Mode Dimmer Module with Trim (26.5 x 55mm)
SP900	Dimmer M10 Nut Runner Tool **Use the nut runner to easily exchange dimmer modules and create customised dimmer switch plate.**

Standards: BS EN 60669-1, BS EN 55015 **Type:** Leading Edge, **MD9014:** Leading & Trailing Edge
Back Box Depth: 25mm Minimum **Cable Size:** 2 x 1.5mm²
Dimensions: **1 Gang:** (86mm x 86mm x 9.5mm), **2 Gang:** (146mm x 86mm x 9.5mm)


Power Socket Outlets, Fused Connection Units & Control Switches

All Curva® 13A sockets and fused connection units are tested and approved to BS1363 offering assured quality and safety. The provision of a large earth terminal on sockets and fused connection units as standard, greatly facilitates wiring and installation.


The Curva® range offers a solution for almost every possible design need and will enhance the décor of any area whether in a kitchen, bedroom, lounge or study etc...



13A Wall Socket Outlets | Round Pin
Wall Socket Outlets | Fused Connection Units
Fan Isolation Switches | DP Switches



CCA038



CCA039



CCA605



CCA606



CCA771



CCA780

Switched Socket Outlets

CCA605 13A 1 Gang Switched Socket
CCA606 13A 2 Gang Switched Socket


Round Pin Socket Outlets

CCA038 5A Round Pin Socket
CCA039 2A Round Pin Socket

Switched Sockets With USB Outlets

CCA771 13A 1 Gang Switched Socket With 2.1A USB Outlet
CCA780 13A 2 Gang Switched Socket With 2 X USB Outlets (Total Output 2.1A)

Standards: BS 1363, BS 546 **CCA780:** BS 5733, BS1363, BS EN 60950-1 , EN 61000-6-1/3, EN 61204-3
Back Box Depth: 25mm Minimum **771:** 35mm **Cable Size:** 4 x 2.5mm² / 2 x 4mm²
Dimensions: 1 Gang: (86mm x 86mm x 9.5mm), **2 Gang:** (146mm x 86mm x 9.5mm)



CCA050



CCA051



CCA052



CCA053

Fused Connection Units With Optional Flex Outlet Through Front

CCA050	13A Fused Connection Unit
CCA051	13A DP Switched Fused Connection Unit
CCA052	13A DP Switched Fused Connection Unit With Neon
CCA053	13A Fused Connection Unit With Neon

Standards: BS 1363 and BS 1362 (fuse)
Back Box Depth: 25mm Minimum **Cable Size:** 4 x 2.5mm² / 2 x 4mm²
Dimensions: **1 Gang:** (86mm x 86mm x 9.5mm)



CCA020



CCA021



CCA022



CCA023



CCA024



CCA040



CCA042

20A Control Switches With Optional Flex Outlet

CCA040 20A DP 'Water Heater' Switch
CCA022 20A DP Switch
CCA023 20A DP Switch With Neon
CCA042 20A DP 'Water Heater' Switch With Neon

20A DP Sink/Bath Switch

CCA024 20A DP Sink/Bath Switch With Neon

Fan Isolation Switch

CCA020 10A 3 Pole Fan Isolation Switch
CCA021 10A 3 Pole Isolation Switch

Standards: 022, 023, 024, 040, 042: BS EN 60669-1 **020:** IEC / EN 60669-2-4 **Back Box Depth:** 25mm Minimum
Cable Size: 20A DP: 4 x 2.5mm² **10A 3P:** 1 x 2.5mm² / 2 x 2.5mm²
Dimensions: 1 Gang: (86mm x 86mm x 9.5mm)



CCA200




CCA201



CCA202



CCA204

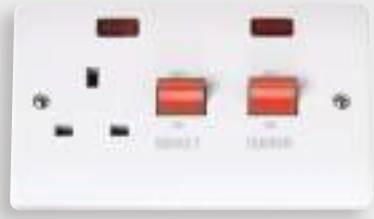

CCA205



CCA203

45A Switches And Socket Outlets

CCA200	45A 1 Gang DP Switch
CCA201	45A 1 Gang DP Switch With Neon
CCA202	45A 2 Gang DP Switch
CCA203	45A 2 Gang DP Switch With Neon
CCA204	45A 2 Gang DP Switch With 13A DP Switched Socket
CCA205	45A 2 Gang DP Switch With 13A DP Switched Socket & Neons

Standards: 200, 201, 202, 203: BS EN 60669-1 **203, 204:** BS 4177-1-2-3 and BS 1363-2
Back Box Depth: 35mm Minimum **Cable Size: 45A:** 1 x 16mm²
Dimensions: 1 Gang: (86mm x 86mm x 9.5mm), **2 Gang:** (146mm x 86mm x 9.5mm)



CCA017



CCA100



CCA060



CCA061

Blank Plates

CCA060 1 Gang Blank Plate
CCA061 2 Gang Blank Plate

Flex Outlet Plates

CCA017 20A Flex Outlet Plate

Dual Voltage Shaver Socket

CCA100 115/230V Dual Voltage Shaver Socket

CLICK® dual voltage shaver outlets incorporate a double wound isolating transformer rated 20Va at 230V or 115V and meets BS EN 61558-2-5: 2010 making it safe for use in bathrooms.

Shaver outlet is not continuously rated and therefore not suitable for use as a permanent charging outlet.

Standards: **100:** BS EN 61558
Back Box Depth: **017:** 16mm min. **100:** 47mm min. **Cable Size:** **100:** 2 x 1.5mm² / 1 x 2.5mm² **017:** 1 x 6mm² / 4 x 2.5mm²
Dimensions: **1 Gang:** (86mm x 86mm x 9.5mm), **2 Gang:** (146mm x 86mm x 9.5mm)

TV, Telephone & Data Sockets

Providing the means to facilitate the connection of modern communications equipment is as important today as it is to provide the electrical power to operate them.



RJ11 Outlet | UK Telephone Outlets | Satellite Socket Outlets | Coaxial Sockets



CCA115



CCA122/127



CCA119/124

RJ11 Telephone Outlet

CCA115 Single RJ11 (Irish/US) Outlet

Telephone Outlets

CCA119 Single Telephone Outlet - Master
CCA122 Twin Telephone Outlet - Master
CCA124 Single Telephone Outlet - Secondary
CCA127 Twin Telephone Outlet - Secondary

Twin outlets are 2 separate sockets and not internally linked together.

Back Box Depth: 16mm Minimum **115:** 35mm Minimum **Termination Type:** IDC
Dimensions: 1 Gang: (86mm x 86mm x 9.5mm)



CCA065



CCA066



CCA156



CCA170



CCA157



CCA158



CCA159

Non-Isolated Coaxial Outlets (Unshielded)

CCA065 Single Coaxial Outlet
CCA066 Twin Coaxial Outlet

Satellite Outlets (Unshielded)

CCA156 Non-Isolated Single Satellite Outlet
CCA157 Isolated Satellite & Isolated Coaxial Outlet
CCA170 Non-Isolated Satellite & Non-Isolated Coaxial Outlet

Isolated Coaxial Outlets (Unshielded)

CCA158 Single Isolated Coaxial Outlet
CCA159 Twin Isolated Coaxial Outlet

Isolated outlets will filter out any interference, if a 2 way signal is required, i.e. for use with satellite hard wire extensions, then a non-isolated outlet is required.

Back Box Depth: 16mm Minimum
Dimensions: **1 Gang:** (86mm x 86mm x 9.5mm)



CCA080



CCA081



CCA082



CCA083



CCA084



CCA085



CCA086

Moulded Pattress Boxes

CCA080	1 Gang 16mm Deep Pattress Box With Earth Terminal
CCA081	1 Gang 25mm Deep Pattress Box
CCA082	2 Gang 25mm Deep Pattress Box
CCA083	1 Gang 35mm Deep Pattress Box
CCA084	2 Gang 35mm Deep Pattress Box
CCA085	1 Gang 47mm Deep Pattress Box With Earth Terminal
CCA086	2 Gang 47mm Deep Pattress Box Fitted With Cable Restraint & Earth Terminal



WA095



WA102



WA106P



WA107P



GA100



WA4247

essentials™ For the complete range of back boxes see Essentials™ page m4.
For the complete range of FlameGuard® back boxes see Essentials™ page m8.

Galvanised Steel Back Boxes

WA092 1 Gang 16mm Deep Galvanised Steel K.O. Box
WA093 1 Gang 25mm Deep Galvanised Steel K.O. Box
WA094 2 Gang 25mm Deep Galvanised Steel K.O. Box
WA095 1 Gang 35mm Deep Galvanised Steel K.O. Box
WA096 2 Gang 35mm Deep Galvanised Steel K.O. Box
WA097 1 Gang 47mm Deep Galvanised Steel K.O. Box
WA098 2 Gang 47mm Deep Galvanised Steel K.O. Box
WA099 1 + 1 35mm Deep Dual Accessory Box
WA102 1 + 2 35mm Deep Dual Accessory Box

'Ezylink' Dry Lining Box Connector

GA100 'Ezylink' Dry Lining Box Connector

Dry Lining Boxes

WA087P 1 Gang 35mm Deep Dry Lining Box
WA088P 2 Gang 35mm Deep Dry Lining Box
WA106P 1 Gang 47mm Deep Dry Lining Box
WA107P 2 Gang 47mm Deep Dry Lining Box
WA108P Round Ceiling 34mm Deep Dry Lining Box

FlameGuard® Dry Lining Boxes

WA4135 1 Gang 35mm Deep FlameGuard® Dry Lining Box
WA4235 2 Gang 35mm Deep FlameGuard® Dry Lining Box
WA4147 1 Gang 47mm Deep FlameGuard® Dry Lining Box
WA4247 2 Gang 47mm Deep FlameGuard® Dry Lining Box

essentials™

Essential Products for any Installation







essentials™

The Essentials™ Product Group Is Just That – ESSENTIAL

Contents

Galvanised Steel Boxes	**m4**	Adaptors & Extension Sockets	**m31**
Dry Lining Boxes	**m7**	Junction & Link Boxes	**m32**
Studbox®	**m10**	Socket & Blank Plates	**m34**
IP66 Weatherproof Accessories	**m13**	Fused Main Switch	**m35**
Metal Clad Accessories	**m16**	Rewireable Plug Tops	**m36**
Red Accessories	**m24**	Plug Top Fuses	**m37**
Floor Accessories	**m26**	IEC Lock®	**m40**
Ceiling Accessories	**m27**		



In addition to the long established Click® brand of moulded electrical accessory products we have developed and introduced additional accessory ranges, namely Polar™, Curva® & Mode®, as well as decorative metal ranges.

Whilst each of these ranges are unique in their own right, the plate accessory is only part of the complete wiring solution. Hence our range of Essentials™ illustrated herein.

The Essentials™ group of products comprises those items that you will find in a wide variety of installations. Products such as junction boxes, flush mounted switch and socket boxes.



WA092



WA095



WA094



WA099/WA370



WA102/WA375

Galvanised Steel Back Boxes

WA092 1 Gang 16mm Deep Galvanised Steel K.O. Box
WA093 1 Gang 25mm Deep Galvanised Steel K.O. Box
WA094 2 Gang 25mm Deep Galvanised Steel K.O. Box
WA095 1 Gang 35mm Deep Galvanised Steel K.O. Box
WA096 2 Gang 35mm Deep Galvanised Steel K.O. Box
WA097 1 Gang 47mm Deep Galvanised Steel K.O. Box
WA098 2 Gang 47mm Deep Galvanised Steel K.O. Box
WA099 1 + 1 35mm Deep Dual Accessory Box
WA102 1 + 2 35mm Deep Dual Accessory Box
WA671 1 Gang 25mm Deep Architrave Box With 60.3mm Hole Centres
WA672 2 Gang 25mm Deep Architrave Box With 120.6mm Hole Centres

Galvanised Steel Back Boxes - Deco® Range Only

WA370 1 + 1 35mm Deep Dual Accessory Box (Deco® Range Only)
WA375 1 + 2 35mm Deep Dual Accessory Box (Deco® Range Only)
WA571 1 Gang 25mm Deep Architrave Galvanised Steel K.O. Box (Deco® Range Only)
WA572 2 Gang 25mm Deep Architrave Galvanised Steel K.O. Box (Deco® Range Only)

Cutout sizes: **WA099:** 158mm x 74mm **WA102:** 220mm x 74mm **WA370:** 168mm x 74mm **WA375:** 228mm x 74mm
WA571: 87mm x 34mm x 25mm **WA572:** 148mm x 34mm x 25mm **WA671:** 73mm x 30mm x 25mm **WA672:** 135mm x 30mm x 25mm



WA512 WA518 WA20518 WA20524

Galvanised Steel Back Boxes

WA512	2 Tier 47mm Deep K.O. Box
WA518	3 Tier 47mm Deep K.O. Box


GridPro® Flush Mounted Back Boxes

WA20518	18 Gang GridPro® Flush Mounted Back Box - 56mm Deep
WA20524	24 Gang GridPro® Flush Mounted Back Box - 56mm Deep

Back Box Depth: **WA512, WA518:** 47mm **WA20518, WA20524:** 56mm
Dimensions: **WA512:** 137mm x 137mm **WA518:** 137mm x 197mm
WA20518: 185mm x 197mm **WA20524:** 185mm x 255mm
Knockouts: **WA512:** 7 x 20mm, 3 x 25mm **WA518:** 8 x 20mm, 4 x 25mm
WA20518: 10 x 20mm, 6 x 25mm **WA20524:** 10 x 20mm, 6 x 25mm



SP625



SP650



SP640

Security Screws

SP622	Define® M3.5 Security Screw 22mm Long (Bag 100) - Chrome
SP623	Standard M3.5 Security Screw 50mm Long (Bag 100) - Chrome
SP625	Standard M3.5 Security Screw 25mm Long (Bag 100) - Chrome


Require 2mm security allen key/driver.

Longer Fixing Screws

SP640*	Define® 3.5mm Dia. 40mm Long Screws (Bag 100)
SP650*	Standard 3.5mm Dia. 50mm Long Screws (Bag 100)
SP675*	Standard 3.5mm Dia. 75mm Long Screws (Bag 100)

SP640 not available in Brass (BR).
Chrome finish may be used with white plate accessories.

Understanding the code:
Longer Fixing Screws available in **BR** Brass, **CH** Chrome and **BN** Black Nickel finishes.
Suffix code with preferred finish.



WA106P



WA108P



WA107P



Simply connects any combination of Click® dry lining boxes to provide the neatest installation of cavity boxes possible.



GA100

Dry Lining Boxes

WA087P	1 Gang 35mm Deep Dry Lining Box
WA088P	2 Gang 35mm Deep Dry Lining Box
WA106P	1 Gang 47mm Deep Dry Lining Box
WA107P	2 Gang 47mm Deep Dry Lining Box
WA108P	Round Ceiling 34mm Deep Dry Lining Box


'Ezylink' Dry Lining Box Connector

GA100	'Ezylink' Dry Lining Box Connector

Cutout sizes: **1 Gang:** 75mm x 75mm **2 Gang:** 135mm x 75mm **WA108P:** 65mm dia.



WA4135



WA4147



WA4235



WA4247



The intumescent layer within the box expands as the temperature increases filling the metal box cavity.

FlameGuard system

FlameGuard® Dry Lining Boxes

WA4135	1 Gang 35mm Deep FlameGuard® Dry Lining Box
WA4147	1 Gang 47mm Deep FlameGuard® Dry Lining Box
WA4235	2 Gang 35mm Deep FlameGuard® Dry Lining Box
WA4247	2 Gang 47mm Deep FlameGuard® Dry Lining Box


BS Standards: BS EN 1364-1:1999 Fire resistance, BS EN ISO 140-3:1995 Acoustic, BS 4662
Cutout sizes: **1 Gang:** 73mm x 73mm **2 Gang:** 132mm x 73mm

StudBox®

1. StudBox® is 450mm long - so no need to measure height from the floor on stud work.
2. Set StudBox® at marked height and insert first screw. Set level using spirit level then insert second screw.
3. Push out tabs and insert cables into required box /boxes. Use snips to remove plaster board marking points off the boxes not used.
4. Plasterer puts board in correct position then bangs in area of StudBox®.
5. Points on the face of the box mark exact position to cut out. No measuring required.
6. StudBox® fits tight to the back of board reducing noise and fire passage significantly. Working depth of 48mm (including 12.5mm plasterboard).



1 Gang Back Box | 2 Gang Back Box
6-in-1 Combination Recess Wiring Back Box

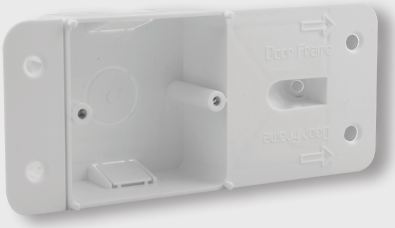

SB1G



SB2G



SB6IN1

StudBox®

StudBox® Back Boxes

SB1G	StudBox® 1 Gang Back Box 120-600mm for Timber Metal Stud Work
SB2G	StudBox® 2 Gang Back Box 130-600mm for Timber Metal Stud Work
SB6IN1	StudBox® Stud Wall 6-in-1 Combination Recess Wiring Back Box

Back Box Depth: 35mm

AquIP66®

IP66 Weatherproof Sockets & Switches

A comprehensive selection of weatherproof electrical accessory products are featured in the following pages. The polycarbonate construction makes the Aquip66® range a durable and long lasting heavy duty range of products.

All switch products are of modular construction allowing the installer total freedom in designing customised switching solutions according to on-site requirements.

All socket outlets are tested and approved to BS1363. Unfurnished enclosures are available for use in conjunction with our extensive range of Minigrid™ modules.



Furnished Switch Enclosures | Unfurnished Switch Enclosures
Furnished Enclosures | Unfurnished Enclosures

Features & Benefits

Robust Construction

- Polycarbonate construction
- High impact resistance
- UV protected against fading
- Ergonomic Design
- Smooth operation of switches
- Neutral modern design suitable for most locations
- Flexible rubber base allows for mounting on most types of uneven surfaces

Multiple Gland Entry Position

- Multiple knockouts (20mm) for entry from all angles

Weatherproof - IP66

- Offers high level of protection against ingress of water jets and dust

Multiple Switch Configurations


- Designed to fit most Minigrid™ modules (13A Max)



MINIGRID®

The products illustrated in this section of the catalogue are furnished enclosures and unfurnished enclosures.

For comprehensive information on the full range of modules available please refer to the Minigrid™ section of the catalogue.

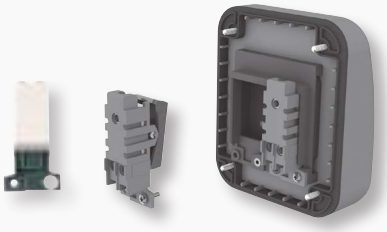



OA411AG / OA401AG



OA412AG / OA402AG

Aquip66®

IP66 Weatherproof Switches

OA411AG 10AX 1 Gang 2 Way IP66 Weatherproof Switch Unit
Fitted with a 2-way Minigrid™ module

OA412AG 10AX 2 Gang 2 Way IP66 Weatherproof Switch Unit
Fitted with 2 x 2-way Minigrid™ modules

IP66 Weatherproof Switch Enclosures

OA401AG 1 Gang IP66 Weatherproof Unfurnished Switch Unit

OA402AG 2 Gang IP66 Weatherproof Unfurnished Switch Unit

Minigrid™ Modules supplied separately

Standards: BS EN 60529 (Enclosure), BS EN 60669 (Switch) **Knock-outs:** 20mm **Cable Size:** 4 x 1.5mm², 1 x 6mm², 2 x 2.5mm²
Dimensions: **From Front:** 100mm (Height) x 85.5mm (Width) x 74mm (Depth - with Gasket)
From Rear: 105.5mm (Height) x 90.5mm (Width)



OA035AG / OA501AG



OA036AG / OA502AG

Fitted with a Mode® Part M
Switched Socket



Aquip66®

IP66 Weatherproof Switched Sockets

OA035AG 13A 1 Gang DP IP66 Weatherproof Switched Socket Unit
Fitted with 1 gang Mode® switched socket

OA036AG 13A 2 Gang DP IP66 Weatherproof Switched Socket Unit
Fitted with a 2 gang Mode® switched socket

IP66 Weatherproof Socket Enclosures

OA501AG 1 Gang IP66 Weatherproof Unfurnished Unit

OA502AG 2 Gang IP66 Weatherproof Unfurnished Unit

Accessory supplied separately. Accepts accessories up to 35mm deep

Standards: BS EN 60529 (Enclosure), BS 1363 (Socket) **Knock-outs:** 20mm (Socket) **Cable Size:** 4 x 2.5mm², 2 x 4mm²
Dimensions: 1 Gang: From Front: 158mm (Height) x 100mm (Width) x 90mm (Depth - with Gasket)
From Rear: 130mm (Height) x 105mm (Width). **2 Gang: From Front:** 158mm (Height) x 158mm (Width) x 90mm (Depth - with Gasket)
From Rear: 130mm (Height) x 165mm (Width) **Back Box Depth:** 35mm

Metal Clad Accessories

10AX Switches | Unfurnished Switch Plates
20A Switches | 13A Socket Outlets
Fused Connection Units | 45A Switches
Telephone & Coaxial Socket Outlets
New Media™ Plates | Mounting Boxes &
Blank Plates

A comprehensive selection of Metal Clad electrical accessory products are featured in the following pages. Electrophoretically coated plates and back boxes provide a durable and long lasting heavy duty finish to this attractive range of products.

All switch products are of modular construction allowing the installer total freedom in designing customised switching solutions according to on-site needs.

All socket outlets and spurs are tested and approved to BS1363. Unfurnished plates and mounting boxes are available for use in conjunction with our extensive range of Minigrid™ and New Media™ modules.

MINIGRID®





The products illustrated in this section of the catalogue are finished plates and unfurnished mounting plates.

For comprehensive information on the full range of modules available please refer to our Minigrid™ product brochure.





CL010/011



CL012



CL019



CL105



CL013

Plates Switches - MiniGrid™

CL010	10AX 1 Gang 1 Way Plate Switch
CL011	10AX 1 Gang 2 Way Plate Switch
CL011B	10AX 1 Gang 2 Way Plate Switch (No Knockouts)
CL012	10AX 2 Gang 2 Way Plate Switch
CL012B	10AX 2 Gang 2 Way Plate Switch (No Knockouts)
CL013	10AX 3 Gang 2 Way Plate Switch
CL019	10AX 4 Gang 2 Way Plate Switch
CL105	10AX 6 Gang 2 Way Plate Switch

Plates Switches

CL025	10AX 1 Gang Intermediate Switch

Standards: BS EN 60669
Cable Size: 4 x 1.5mm² / 2 x 2.5mm² / 1 x 6mm² Maximum **Back Box Depth:** 40mm Minimum
Dimensions: **1 Gang:** (80mm x 80mm), **2 Gang:** (140mm x 80mm) **Knock-outs:** 20mm



CL401



CL402



CL403



CL404



CL426



CL518

MINIGRID® For the complete range of Minigrid™ modules please see our dedicated Minigrid™ section.

Unfurnished Plates - MiniGrid™

CL401 1 Gang MiniGrid™ Unfurnished Plate - 1 Aperture
CL402 1 Gang MiniGrid™ Unfurnished Plate - 2 Apertures
CL403 1 Gang MiniGrid™ Unfurnished Plate - 3 Apertures
CL404 2 Gang MiniGrid™ Unfurnished Plate - 2 x 2 Apertures
CL plates utilise WH finished Minigrid™ modules.

CL406 2 Gang MiniGrid™ Unfurnished Plate - 2 x 3 Apertures
CL426 2 Gang MiniGrid™ Unfurnished Plate - 6 In-Line Apertures

2 Tier Unfurnished Plates - MiniGrid™

CL512 2 Tier MiniGrid™ Unfurnished Plate - 12 Apertures - Metal Clad
Decorative finished Deco® victorian plate finishes also available. 2 x GR100 yokes required, see page c8.

3 Tier Unfurnished Plates - MiniGrid™

CL518 3 Tier MiniGrid™ Unfurnished Plate - 18 Apertures - Metal Clad
Decorative finished Deco® victorian plate finishes also available.3 x GR100 yokes required, see page c8.

Back Box Depth: 40mm Minimum **Cable Size: CL512 & CL518:** Dependant on module used
Dimensions: 1 Gang: (80mm x 80mm), **2 Gang:** (140mm x 80mm) **CL512:** (148mm x 148mm) **CL518:** (148mm x 207mm)
Knock-outs: 20mm



CL035



CL036



CL771U



CL780



CL835



CL840

Switched Socket Outlets

CL035	13A 1 Gang DP Switched Socket
CL035B	13A 1 Gang DP Switched Socket (No Knockouts)
CL036	13A 2 Gang DP Switched Socket
CL036B	13A 2 Gang DP Switched Socket (No Knockouts)

Switched Socket Outlets

CL835	13A 1 Gang Switched Socket With Outboard Neon Rocker
CL840	13A 2 Gang Switched Socket With Outboard Neon Rockers

Switched Sockets With USB Outlets

CL771U	13A 1 Gang Switched Socket With 2.1A USB Outlet (Twin Earth)
CL770	13A 2 Gang Switched Socket With 2.1A USB Outlet (Twin Earth)
CL780	13A 2 Gang Switched Socket With Twin 2.1A USB Outlets (4.2A) (Twin Earth)

Standards: BS1363 **770, 771:** BS5733, BS60950-1, EN61000-6-1, EN 61000-6-3 **Back Box Depth:** 40mm Minimum
Cable Size: 4 x 2.5mm² / 2 x 4mm² **Knock-outs:** 20mm
Dimensions: **1 Gang:** (80mm x 80mm), **2 Gang:** (140mm x 80mm)



CL1035



CL1036



CL1835



CL1840

Safety Shutter Sockets

CL1035	13A 1 Gang DP 3 Pin Safety Shutter Switched Socket
CL1035B	13A 1 Gang DP 3 Pin Safety Shutter Switched Socket (No Knockouts)
CL1835	13A 1 Gang DP 3 Pin Safety Shutter Switched Socket With Neon
CL1835B	13A 1 Gang DP 3 Pin Safety Shutter Switched Socket With Neon (No Knockouts)
CL1036	13A 2 Gang DP 3 Pin Safety Shutter Switched Socket (Twin Earth)
CL1036B	13A 2 Gang DP 3 Pin Safety Shutter Clean Earth Switched Socket (Twin Earth) (No Knockouts)
CL1840	13A 2 Gang DP 3 Pin Safety Shutter Switched Socket With Outboard Rockers & Neons (Twin Earth)
CL1840B	13A 2 Gang DP 3 Pin Safety Shutter Switched Socket With Outboard Rockers & Neons (Twin Earth) (No Knockouts)

Standards: BS1363; 675: BS1363-2, BS EN 60669-1 **Back Box Depth:** 40mm Minimum
Cable Size: 4 x 2.5mm² / 2 x 4mm² **Knock-outs:** 20mm
Dimensions: **1 Gang:** (80mm x 80mm), **2 Gang:** (140mm x 80mm)



CL022



CL049



CL053



CL200



CL660



CL675



CL203

20A Control Switches with Optional Flex Outlet

CL022	20A DP Switch
CL023	20A DP Switch With Neon

45A Switches

CL200	45A 1 Gang DP Switch
CL201	45A 1 Gang DP Switch With Neon
CL202	45A 2 Gang DP Switch
CL203	45A 2 Gang DP Switch With Neon

Lockable Switches

CL660	20A Double Pole Key Lockable Switch
CL660B	20A Double Pole Key Lockable Switch (No Knockouts)

Fused Connection Units With Optional Flex Outlet

CL049	3A Fused Connection Unit
CL050	13A Fused Connection Unit
CL051	13A DP Switched Fused Connection Unit
CL051B	13A DP Switched Fused Connection Unit (No Knockouts)
CL052	13A DP Switched Fused Connection Unit With Neon
CL053	13A Fused Connection Unit With Neon

Lockable Sockets

CL675	13A 1 Gang DP Key Lockable Socket With Neon
CL675B	13A 1 Gang DP Key Lockable Socket With Neon (No Knockouts)

Standards: BS EN 60669 20A, **13A & 3A:** BS 1363, and BS 1362 (Fuse)
Cable Size: 1 x 16mm² **13A & 3A:** 3 x 2.5mm² or 2 x 4mm² **660:** 3 x 2.5mm2, 2 x 4mm2 **Knock-outs:** 20mm
Dimensions: **1 Gang:** (80mm x 80mm), **2 Gang:** (140mm x 80mm) **Back Box Depth:** 40mm **45A:** 50mm



CL120



CL158



CL311



CL312

new media™

All New Media™ plates are suitable for use with standard euro module inserts.
Selecting from a range of module inserts covering all manner of media transfer, the installer will now be able to configure their own arrangement of TV, radio or satellite reception, plus speaker, telephone and data outlets. All modules can be inserted into single or double wall plates, fitted onto standard switch and socket boxes.

Telephone & Coaxial Socket Outlets

CL120 Single Telephone Outlet - Master
CL158 Single Isolated Coaxial Outlet

Isolated outlets will filter out any interference, if a 2 way signal is required, i.e. for use with satellite hard wire extensions, then a non-isolated outlet is required.

Unfurnished Plates - New Media™

CL311 1 Gang New Media™ Unfurnished Plate - 2 Apertures
CL312 2 Gang New Media™ Unfurnished Plate - 4 Apertures

Back Box Depth: 40mm Minimum, **Knock-outs:** 20mm
Dimensions: 1 Gang: (80mm x 80mm), **2 Gang:** (140mm x 80mm)



CL060



CL085



CL061



CL086

Mounting Boxes and Blank Plates

CL060 1 Gang Blank Plate
CL061 2 Gang Blank Plate
CL083 1 Gang 40mm Deep Mounting Box
CL084 2 Gang 40mm Deep Mounting Box
CL085 1 Gang 40mm Deep Mounting Box (No Knockouts)
CL086 2 Gang 40mm Deep Mounting Box (No Knockouts)
CL087 1 Gang 50mm Deep Mounting Box
CL088 2 Gang 50mm Deep Mounting Box


Dimensions: 060: 80mm x 80mm x 4mm **061:** 140mm x 80mm x 4mm
083, 085: 80mm x 80mm x 40mm **084, 086:** 140mm x 80mm x 40mm

Red Accessories & Floor Accessories

10AX Switches | Unfurnished Switch Plates
13A Socket Outlets | Fused Connection
Units Telephone & Coaxial Socket Outlets
New Media™ Plates

A selected range of special purpose moulded & Stainless Steel accessories.

MINIGRID®



The products illustrated in this section of the catalogue are finished plates and unfurnished mounting plates.

For comprehensive information on the full range of modules available please refer to our Minigrid™ product brochure.





WA081RD



WA037RD



WA179



WA180



WA185


Socket Outlets

WA037RD	13A 2 Gang DP Switched Socket Clean Earth
WA179	13A 2 Gang Unswitched Socket
WA180	13A 2 Gang DP Switched Socket **(Fitted with twin earth terminals)**

Moulded Surface Pattress Boxes - Urea

WA081RD	1 Gang 25mm Deep Surface Pattress Box
WA185	2 Gang 25mm Deep Surface Pattress Box


Standards: BS 1363
Back Box Depth: 25mm Minimum **Cable Size:** 4 x 2.5mm² / 2 x 4mm² **13A:** 2 x 2.5mm²
Dimensions: **1 Gang:** (86mm x 86mm x 11mm), **2 Gang:** (146mm x 86mm x 11mm)




WA401RD



WA402RD



WA403RD



WA049RD



WA056RD

MINIGRID® For the complete range of compatible modules, see the dedicated Minigrid™ section, page j18.

Unfurnished Plates - MiniGrid™

WA401RD 1 Gang MiniGrid™ Unfurnished Plate - 1 Aperture
WA402RD 1 Gang MiniGrid™ Unfurnished Plate - 2 Apertures
WA403RD 1 Gang MiniGrid™ Unfurnished Plate - 3 Apertures


Fused Connection Units

WA049RD 3A Fused Connection Unit
WA056RD 3A DP Switched Fused Connection Unit


Standards: BS 1363 and BS 1362 (fuse)
Back Box Depth: Dependant on modules used, **WA049RD/056RD:** 25mm Minimum
Cable Size: Dependant on modules used, **WA049RD/056RD:** 3 x 2.5mm² or 2 x 4mm²
Dimensions: 1 Gang: (86mm x 86mm x 11mm), **2 Gang:** (146mm x 86mm x 11mm)




FS030SS



FS311SS

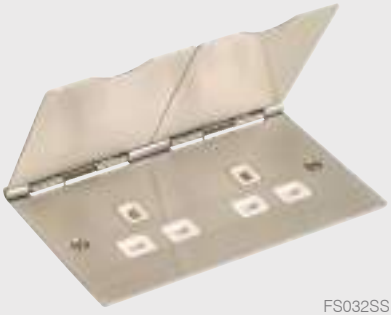

FS032SS

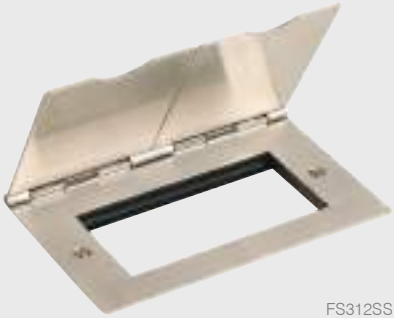

FS312SS

new media™

For a complete range of New Media™ modules please see our dedicated New Media™ section.

Floor Socket Outlets

FS030SS 13A 1 Gang Floor Socket
FS032SS 13A 2 Gang Floor Socket
13A floor socket outlets BS Kitemark Approved

Unfurnished Floor Plates - For Use With New Media™ Modules

FS311SS 1 Gang New Media™ Unfurnished Floor Plate - 2 Apertures
FS312SS 2 Gang New Media™ Unfurnished Floor Plate - 4 Apertures

Standards: BS 1363
Back Box Depth: 311/312: Dependent on modules fitted **030/032:** 35mm Minimum
Cable Size: 311/312: Dependent on modules fitted **030/032:** 4 x 2.5mm² / 2 x 4mm²
Dimensions: 030/311: 86mm x 93mm **032/312:** 146mm x 93mm



PRW208



PRW210/
PRW211



PRC009



PRC210



PRW213



PRC216

Pull Cord Switches

PRC009	10AX 2 Way Ceiling Pull Cord Switch
PRC210	10AX 2 Way Pull Cord Switch
PRC216	16A DP Pull Cord Switch With Neon
	Decorative covers available, see overleaf.

Pull Cord Switches

PRW208	10A 3 Pole Fan Isolation Pull Cord Switch
PRW210	45A DP Pull Cord Switch With Mechanical 'On/Off' & Neon
PRW211	50A DP Pull Cord Switch With Mechanical 'On/Off' & Neon
	(Twin Terminal Screws)
PRW213	50A DP Round Pull Cord Switch With Mechanical 'On/Off', Neon & Pattress
	(Twin Terminal Screws) C/W Pattress

Standards: BS EN 60669 **Cable Size:** **PRC210:** 3 x 2.5mm² / 1 x 6mm² **PRW211:** 2 x 6mm² / 1 x 25mm² **PRW213:** 2 x 6mm² / 1 x 25mm² **PRC009, PRW208, PRC216:** 2 x 1.5mm² / 1 x 2.5mm² **PRW210:** 1 x 16mm²
Dimensions: **PRC009:** 75.5mm Dia. x 43.5mm **PRC210/216:** 70mm Dia. x 42mm **PRW208:** 86mm x 86mm x 43mm **PRW210/211:** 86mm x 86mm x 43mm **PRW213:** 100mm Dia. x 77mm



CV210CH



PRC1440



PRC210 + CV210CH



PRC1440RD

Pull Cord Switches

CV210CH	Metallic Cover for PRC210
CV210SC	Metallic Cover for PRC210

Pendant Sets & Ceiling Rose

PRC1440	6A 4 Pin Quick-Connect Ceiling Rose, Plug & Cover
PRC1440RD	6A 4 Pin Quick-Connect Ceiling Rose, Plug & Cover - Red

Standards: **PRC1440:** BS 6972: 1988 & BS 5733: 2010 **Cable Size:** 2 x 1.5mm²
Dimensions: **CV210:** 72mm Dia. x 44mm **PRC1440:** 70mm Dia x 43mm



PRC006



PRC008



PRC015



PRC017



PRC031/033

For our full range of wiring accessories, see our dedicated Curva®, Polar™ and Mode® sections.

Pendant Sets & Ceiling Rose

PRC031	6" T2 BC Ceiling Pendant Set
PRC033	9" T2 BC Ceiling Pendant Set
PRC038	6" T2 BC TRS Pendant Set

T2 Batten Lampholders

PRC006	T2 BC Batten Lampholder Straight Skirt
PRC007	T2 BC Batten Lampholder H.O. Skirt
PRC008	T2 BC Angled Batten Lampholder Straight Skirt

T2 Loop-In Batten Lampholders

PRC015	T2 BC Loop-In Batten Lampholder With Straight Skirt
PRC016	T2 BC Loop-In Batten Lampholder With H.O. Skirt
PRC017	T2 BC Loop-In Angled Batten Lampholder With H.O. Skirt

Standards: BS 67, BS EN 61184 **Cable Size:** 2 x 1.5mm²
Dimensions: **PRC006/7/8:** Base 65mm Dia. x 62mm **015/16/17:** Base 86mm Dia x 77mm **031/033:** Base 86mm Dia



PRC001



PRC003



PRC005/012



PRC020



PRC004/011



PRC029

T2 Lampholders

PRC003 T2, BC Cord Grip Pendant Lampholder
PRC020 T2 BC Cord Grip TRS Lampholder
PRC004 T2 BC ½" Thread Entry Cord Grip Lampholder Straight Skirt
PRC011 T2 BC 10mm Thread Entry Cord Grip Lampholder Straight Skirt
(with straight skirt)

Pendant Sets & Ceiling Rose

PRC001 Ceiling Rose Fitted With Clear Polycarbonate Base
PRC029 6" T2 Pendant Set Without Rose

T2 Push-Bar Lampholders

PRC005 T2 BC ½" Thread Entry Cord Grip Switched Lampholder Straight Skirt
PRC012 T2 BC 10mm Thread Entry Cord Grip Switched Lampholder Straight Skirt
Lampholder with straight skirt and push-bar

Standards: BS EN 61184 001: BS 67
Cable Size: 1.0mm² **001:** 2 x 1.5mm²
Dimensions: **PRC001:** 86mm x 30mm



PA040



PA041A



PA042A



ES001



ES008

Multiplugs And Adaptors

PA040	1 Amp Fused Shaver Adaptor - White
PA041A	13A 2 Way Resililent Adaptor - White
PA042A	13A Fused 3 Way Adaptor - White

Extension Sockets And Leads

ES001	13A 1 Gang Trailing Socket With Neon
ES002	13A 2 Gang Trailing Socket With Neon
ES003	13A 4 Gang Trailing Socket With Neon
ES008	13A 3 Gang Trailing Socket With Neon

Cable not included

Standards: BS 1363 040: BS 5733



WA070



WA071



WA073



WA077



WA079

Junction Boxes - White

WA070	5A Junction Box Selective Entry 4 Terminal
WA071	20A Junction Box Selective Entry 4 Terminal
WA072	30A Junction Box Selective Entry 3 Terminal
WA073	20A Junction Box Selective Entry 6 Terminal
WA074	20A Junction Box 58mm Diameter 4 Terminal

Junction Boxes - Brown

WA075	5A Junction Box Selective Entry 4 Terminal
WA076	20A Junction Box Selective Entry 4 Terminal
WA077	30A Junction Box Selective Entry 3 Terminal
WA078	20A Junction Box Selective Entry 6 Terminal
WA079	20A Junction Box 58mm Diameter 4 Terminal

Standards: BS 6220
Cable Size: (Per Terminal): **070, 075:** 2 x 1.5mm² **071, 076:** 4 x 1.5mm² **072, 077:** 2 x 4mm²
073, 078: 4 x 1.5mm² **074, 079:** 4 x 1.5mm²
Dimensions: **070, 075:** 60mm Dia. x 23mm **071, 076:** 80mm Dia. x 30mm **072, 077:** 90mm Dia. x 35mm
073, 078: 86mm Dia. x 30mm **074, 079:** 55mm Dia. x 25mm



WA220



WA222



WA227



WA228

Junction Boxes

WA220 60A Junction Box 3 Terminal - White
WA222 60A Junction Box 3 Terminal - Brown
UK Design Registration No. 3009706

WA227 100A 1 Pole 5 x 35mm² Link Box - Black
WA228 100A 2 Pole 5 x 35mm² Link Box - Black

Standards: BS 5733
Cable Size: **227,228:** 1 x 35mm² **220,222:** 1 x 25mm²
Dimensions: **220/222:** 153mm x 91mm x 35mm **227:** 66mm x 49mm x 34mm **228:** 115mm x 65mm x 55mm



CMA215



PRW217



PRW215



PRW218

45A Cooker Connection Plates

CMA215	45A 1 Gang Cooker Connection Plate
PRW215	45A 1 Gang Cooker Connection Plate
PRW217	45A Easyfit Dual Appliance Outlet Plate

UK Design Registration No. 3015175

Pattress Box for PRW217 - Urea

PRW218	35mm Deep Pattress Box For Use With PRW217

Standards: **215/217:** BS 5733
Back Box Depth: **215:** 35mm Minimum **217:** 25mm Minimum
Cable Size: **215:** 2 x 10mm² **217:** 1 X 10mm²
Dimensions: **215:** 84mm x 84mm x 23mm **217:** 84mm x 130mm x 27mm



DB700



DB750



DB981



DB701



DB751



DB790

80A and 100A variants are supplied with an 80A Bussmann fuse as standard. However the following fuses will fit:

	Fuse Manufacturer			
Rating	Bussmann	Lawson	MEM	GE
40A	40KR85	ME40	404R	RHF40
45A	45KR85	ME45	454R	-
50A	50KR85	ME50	504R	RHF50
60A	60KR85	ME60	604R	RHF60
70A	70KR85	ME70	-	-
80A	80KR85	ME80	804R	RHF80
100A	100KR85	ME100	-	-

Fused Main Switch

DB700 80A Fused Main Switch (80A HRC Fuse Fitted)
DB701 80A Fused Main Switch (80A HRC Fuse Fitted) - Lockable
DB750 100A Fused Main Switch (80A HRC Fuse Fitted)
DB751 100A Fused Main Switch (80A HRC Fuse Fitted) - Lockable
DB790 Metal Enclosure for Fused Main Switch (DB700/701)
DB791 Metal Enclosure for Fused Main Switch (DB750/751)
DB981 Elongated Cable Shroud (Packaged Individually)

Standards: BS EN 60947
Cable Size: **DB700/DB701:** 1 x 25mm² **DB750/DB751:** 1 x 35mm² **Dimensions:** **DB700/DB701:** 120mm x 80mm x 55mm
DB750/DB751: 133mm x 101mm x 60mm **DB981:** 80mm x 90mm x 45mm



PA330



PA166



PA312



PA380
Non-standard plug

13A UK Bar Grip Plug Tops (BS1363/A)

PA320 13A Resilient Plug Top (13A Fused) Bar Grip - White
PA321 13A Resilient Plug Top (3A Fused) Bar Grip - White
PA322 13A Resilient Plug Top (5A Fused) Bar Grip - White
PA330 13A Resilient Plug Top (13A Fused) Bar Grip - Black
PA331 13A Resilient Plug Top (3A Fused) Bar Grip - Black
PA332 13A Resilient Plug Top (5A Fused) Bar Grip - Black

13A UK Fast Grip Plug Tops (BS1363/A)

PA301 13A Resilient Plug Top (13A Fused) Fast Grip - White
PA302 13A Resilient Plug Top (3A Fused) Fast Grip - White
PA303 13A Resilient Plug Top (5A Fused) Fast Grip - White
PA310 13A Resilient Plug Top (13A Fused) Fast Grip - Black
PA311 13A Resilient Plug Top (3A Fused) Fast Grip - Black
PA312 13A Resilient Plug Top (5A Fused) Fast Grip - Black

Non Fused Round Pin Rewireable Plug Tops

PA165 2A Round Pin Plug - White
PA175 2A Round Pin Plug - Black
PA166 5A Round Pin Plug - White
PA167 15A Round Pin Plug - White
PA176 5A Round Pin Plug - Black
PA177 15A Round Pin Plug - Black

Non-Standard Plug Tops

PA340TR 13A Transparent Plug Top (13A Fused) Fast Grip - Clear

Non-Standard Resilient Plug Tops

PA380RD 13A Fused Non-Standard Plug - Red
PA380WH 13A Fused Non-Standard Plug - White

For use with non-standard Click® Mode® sockets CMA935 and CMA936. See page f13.

Standards: BS 1363 **Round Pin:** BS 546



FU023



FU022



FU031



FU038

BSI & ASTA Approved Plug Top Fuses (Boxed)

FU030 Box Of 100 13A Fuses (10 X Sachets Of 10)
FU031 Box Of 100 3A Fuses (10 X Sachets Of 10)
FU032 Box Of 100 5A Fuses (10 X Sachets Of 10)

BSI & ASTA Approved Plug Top Fuses (Bulk Packed)

FU021 13A Cartridge Fuse (Bulk Bag Of 1000 Pcs)
FU022 5A Cartridge Fuse (Bulk Bag Of 1000 Pcs)
FU023 3A Cartridge Fuse (Bulk Bag Of 1000 Pcs)

BSI & ASTA Approved Plug Top Fuses (Carded)

FU035 Card Of 4 X 13A Fuses
FU036 Card Of 4 X 3A Fuses
FU037 Card Of 4 X 5A Fuses
FU038 Card Of 6 X Assorted Fuses (2 X 13A, 2 X 5A & 2 X 3A)

Standards: BS 1362

IEC LOCK®

Unique Lockable Female C13 & C19 IEC Connectors and Outlets

The IEC Lock® range can be used with any standard IEC inlets & guards against accidental disconnection of Computers, PDU's, Servers, most Network Devices & other essential equipment.



C13 IEC Lock® Connectors
C19 IEC Lock® Connectors






PC1002W



PC938W

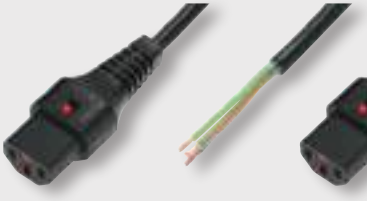

PC979W



PC980W



PA130100BK

C13 IEC Lock® Connector to C14 Plug H05VV-F Leads

PC1002W	C13 IEC Lock® to C14 Plug 3 x 1.00mm 0.5m - Black
PC1003W	C13 IEC Lock® to C14 Plug 3 x 1.00mm 1.5m - Black
PC1021W	C13 IEC Lock® to C14 Plug 3 x 1.00mm 2.0m - Black
PC1022W	C13 IEC Lock® to C14 Plug 3 x 1.00mm 3.0m - Black
PC1024W	C13 IEC Lock® to C14 Plug 3 x 1.00mm 1.0m - Black
PC938W	C13 IEC Lock® to C14 Plug 3 x 1.00mm 1.0m - Orange
PC939W	C13 IEC Lock® to C14 Plug 3 x 1.00mm 1.5m - Orange
PC940W	C13 IEC Lock® to C14 Plug 3 x 1.00mm 2.0m - Orange
PC942W	C13 IEC Lock® to C14 Plug 3 x 1.00mm 3.0m - Orange
PC951W	C13 IEC Lock® to C14 Plug 3 x 1.00mm 0.5m - Orange

C13 IEC Lock® Connector to Free End H05VV-F Leads

PC1025W	C13 IEC Lock® to Free End 3 x 1.00mm 2.0m - Black
PC979W	C13 IEC Lock® to Free End 3 x 1.00mm 3.0m - Black

C13 IEC Lock® Connector to UK 5A Fused Plug H05VV-F Lead

PC980W	C13 IEC Lock® to UK 5A Fused Plug 3 x 1.00mm 2.0m - Black

C13 IEC Lock® Rewirable LSZH Connector

PA130100BK	C13 IEC Lock® Rewireable LSZH Connector



PC1284W



PC1293W



PC1174W



PC1214W

C19 IEC Lock® Connector to C20 Plug H05VV-F Leads

PC1284W	C19 IEC Lock® to C20 Plug 3 x 1.50mm 1.0m - Black
PC1285W	C19 IEC Lock® to C20 Plug 3 x 1.50mm 2.0m - Black
PC1286W	C19 IEC Lock® to C20 Plug 3 x 1.50mm 3.0m - Black
PC1293W	C19 IEC Lock® to C20 Plug 3 x 1.50mm 2.0m - Orange
PC1361W	C19 IEC Lock® to C20 Plug 3 x 1.50mm 1.0m - Orange
PC1375W	C19 IEC Lock® to C20 Plug 3 x 1.50mm 3.0m - Orange

C19 IEC Lock® Connector to Free End H05VV-F Lead

PC1174W	C19 IEC Lock® to Free End 3 x 1.50mm 2.0m - Black
PC1175W	C19 IEC Lock® to Free End 3 x 1.50mm 3.0m - Black

C19 IEC Lock® Connector to UK 13A Fused Plug H05VV-F Lead

PC1214W	C19 IEC Lock® to UK 13A Fused Plug 3 x 1.50mm 2.0m - Black

flow™

Simple Connectivity
& Control





flow™

Simple Connectivity & Control

Contents

Lighting Management Box	**n4**
Flow™ Connectors	**n5**
Flow Extension Cables	**n9**
Flow™ Connectors with Link Cables (Pre-Wired)	**n9**
Smart Receivers	**n10**
Ceiling Rose	**n10**

With the emphasis now on flexibility and ease of installation many building design projects are now focussing on products and services that can adapt to changing legislation, energy efficiency and the ever changing needs of the client.

The lighting management system is a new range of additional products to the existing Flow™ range and has been designed specifically to help contractors create more complex lighting installations quickly, easily and safely. It features a number of new products that allow the quick connection, configuration and re-configuration of circuits, primarily intended for lighting.


Flexibility is important as requirements can change and the ability to adapt to these changes quickly and economically is seen as an advantage. The development of this range has evolved as a result of demand from our customers.



Makes wiring a lighting circuit easy,
using a combination of connectors,
hubs & management boxes.



CT1016

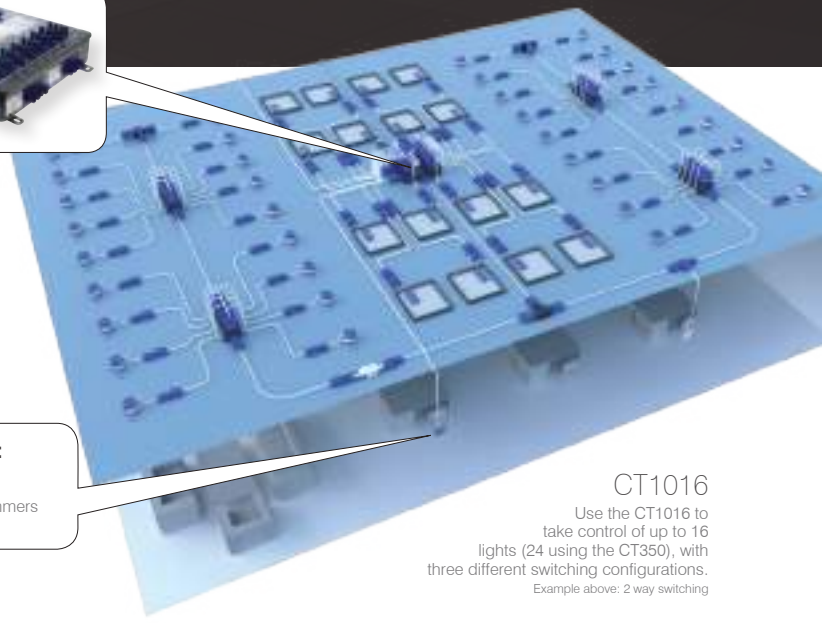

Switching Options:

- PI.R.s
- Suitable for use with dimmers

CT1016

Use the CT1016 to
take control of up to 16
lights (24 using the CT350), with
three different switching configurations.

Example above: 2 way switching



CT1008



CT1016




SP1016

Lighting Management Boxes

CT1016	20A 16 Way Lighting Management Box
CT1008	20A 8 Way Distribution Box
SP1016	Mounting Tray For CT1016 & CT1008

Standards: BS 8488, BS 5733, BS EN 61535
Dimensions: **CT1016:** 269mm x 264mm x 69mm **CT1008:** 264mm x 114mm x 70mm

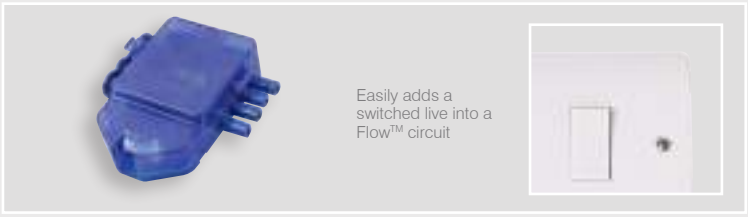

CT2300



CT300



CT350



CT355

3 Pole Flow™ Connectors

CT1300 250V 20A 3 Pole Flow™ Switch Adaptor

CT2300 250V 20A 4 Pole Flow™ Switch Adaptor
with pre-wired earth and neutral links

4 Pole Flow™ Connectors

CT300 250V 20A 4 Pole (1 in 3 Out) Flow™ Hub Junction Box

CT350 250V 20A 4 Pole Splitter (1 in 2 Out)

CT355 250V 20A 4 Pole (1 in 2 Out) Compact Splitter



CT2300 is pre-wired with earth and neutral links.

Standards: BS 8488, BS 5733, BS EN 61535
Cable Size: 4 x 1mm² Flex / 3 x 2.5mm² **Current Rating:** 20A


Dimensions: **CT1300:** 82xmm x 75mm x 25mm **CT2300:** 89xmm x 85mm x 24mm
CT300: 82mm x 82mm x 55mm **CT350:** 85mm x 116mm x 25mm



CT105C



CT105F



CT105M



CT115C



CT115F

Time saving levers

Simply push lever down, offer stripped conductor into the terminal & then release the lever, ensuring the cable cannot easily be pulled out.




3 Pole Flow™ Connectors

CT105C	250V 20A 3 Pole Complete Fast-Fit Connector (CT105M & CT105F)
CT105F	250V 20A 3 Pole Female Fast-Fit Connector
CT105M	250V 20A 3 Pole Male Fast-Fit Connector
CT115C	250V 20A 3 Pole Complete Fast-Fit Connector With Loop (CT105M & CT115F)
CT115F	250V 20A 3 Pole Female Fast-Fit Connector With Loop


Standards: BS EN 61535
Cable Size: 2.5mm² Max **Current Rating:** 20A
Dimensions: **CT105C:** 142mm x 36mm x 24mm **CT115C:** 142mm x 51mm x 24mm **CT105F:** 79mm x 36mm x 23mm
CT105M: 79mm x 36mm x 24mm **CT115F:** 79mm x 51mm x 23mm



CT205C



CT205F



CT205M




CT215C

Time saving levers

Simply push lever down, offer stripped conductor into the terminal & then release the lever, ensuring the cable cannot easily be pulled out.





CT215F

4 Pole Flow™ Connectors

CT205C	250V 20A 4 Pole Complete Fast-Fit Connector (CT205M & CT205F)
CT205F	250V 20A 4 Pole Female Fast-Fit Connector
CT205M	250V 20A 4 Pole Male Fast-Fit Connector
CT215C	250V 20A 4 Pole Complete Fast-Fit Connector With Loop (CT205M & CT215F)
CT215F	250V 20A 4 Pole Female Fast-Fit Connector With Loop

Standards: BS EN 61535
Cable Size: 2.5mm² Max **Current Rating:** 20A
Dimensions: **CT205C:** 142mm x 47mm x 24mm **CT215C:** 142mm x 62mm x 24mm **CT205F:** 79mm x 47mm x 23mm
CT205M: 79mm x 47mm x 24mm **CT215F:** 79mm x 62mm x 23mm



CT103C



CT203C



CT101C



CT102C



CT202C

3 Pole Flow™ Connectors

CT101C	250V 20A 3 Pole Flow™ Connector
CT102C	250V 20A 3 Pole Flow™ Connector Screw-Down Cord Grip
CT103C	250V 20A 3 Pole Flow™ Connector Fast-Fit Cord Grip
CT103M	250V 20A 3 Pole Flow™ Fast-Fit Cord Grip (Male Connector Only)

4 Pole Flow™ Connectors

CT202C	250V 20A 4 Pole Flow™ Connector Screw-Down Cord Grip
CT203C	250V 20A 4 Pole Flow™ Connector Fast-Fit Cord Grip
CT203M	250V 20A 4 Pole Flow™ Fast-Fit Cord Grip (Male Connector Only)

Standards: 102C, 103C, 202C, 203C: BS EN 61535 **CT101C:** BS 5733
Cable Size: 4 x 1mm² Flex / 3 x 2.5mm² **Current Rating:** 20A
Dimensions: CT103C: 135mm x 50mm x 25mm **CT203C:** 135mm x 49mm x 23mm **CT101C:** 105mm x 40mm x 23mm
CT102C: 105mm x 50mm x 23mm **CT202C:** 105mm x 50mm x 23mm



CT802



CT803



CT805



Low Smoke Zero Halogen

Flow™ Extension Cables (PVC)

CT802 6A 4 Pole Flow™ Extension Cable - 2 Metre
CT803 6A 4 Pole Flow™ Extension Cable - 3 Metre
CT805 6A 4 Pole Flow™ Extension Cable - 5 Metre


Flow™ Extension Cables (LSZH)

CT732 6A 3 Pole 0.75mm LSZH To FE 2m
CT733 6A 3 Pole 0.75mm LSZH To FE 3m
CT735 6A 3 Pole 0.75mm LSZH To FE 5m
CT742 6A 4 Pole 0.75mm LSZH To FE 2m
CT743 6A 4 Pole 0.75mm LSZH To FE 3m
CT745 6A 4 Pole 0.75mm LSZH To FE 5m
CT845 20A 4 Pole 2.5mm Male To Female LSZH 5m

Standards: **Connectors:** BS 5733, BS EN 61535, EN 50525-2-11, EN 50525-3
Cable Size: 4 x 0.75mm² **CT845:** 4 x 2.5mm²
Dimensions: Will pass through a 55mm hole



RFSA-61F

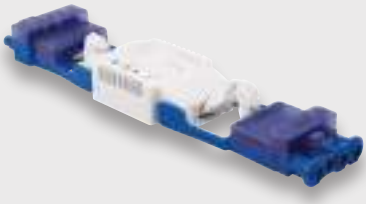

RFDEL-71F



CT1400



CT1401



PRC1440



PRC1440RD

Receivers

RFSA-61F	16A Switching Receiver (Flow™ Enclosure)
RFDEL-71F	160Va LED Dimming Receiver (Flow™ Enclosure)

Ceiling Rose

CT1400	250V 20A 4 Pole Flow™ Ceiling Rose (Without Cover)
CT1401	CT1400 Ceiling Rose Cover

Suitable for use with CT101C, CT102C (3 pole) and CT202C (4 Pole)

Pendant Sets & Ceiling Rose

PRC1440	6A 4 Pin Quick-Connect Ceiling Rose, Plug & Cover
PRC1440RD	6A 4 Pin Quick-Connect Ceiling Rose, Plug & Cover - Red

Standards: CT1400: BS EN 61535 BS 8488 **RFSA-61F, RFDEL-71F:** EN 60669, EN 300220, EN 301489, BS 8488
Cable Size: 4 x 1mm² Flex / 3 x 2.5mm² **Current Rating:** 20A
Dimensions: CT1400: 83mm diameter. x 35mm (suitable for conduit mounting) **CT1401:** 83mm diameter x 65mm
RFSA-61F, RFDEL-71F: 260mm x 52mm x 25mm

CLiCK®
Scolmore GROUP

Index



A

AN-E a18, a23

C

CCA010 l5
CCA011 l5
CCA012 l5
CCA013 l5
CCA017 l12
CCA019 l5
CCA020 l10
CCA021 l10
CCA022 l10
CCA023 l10
CCA024 l10
CCA025 l5
CCA027 l5
CCA038 l8
CCA039 l8
CCA040 l10
CCA042 l10
CCA050 l9
CCA051 l9
CCA052 l9
CCA053 l9
CCA060 l12
CCA061 l12
CCA065 l15
CCA066 l15
CCA080 l16
CCA081 l16
CCA082 l16
CCA083 l16
CCA084 l16
CCA085 l16
CCA086 l16
CCA100 l12
CCA105 l5
CCA115 l14
CCA119 l14
CCA122 l14
CCA124 l14
CCA127 l14
CCA141 l6
CCA142 l6
CCA143 l6
CCA144 l6
CCA156 l15
CCA157 l15
CCA158 l15
CCA159 l15
CCA170 l15
CCA200 l11
CCA201 l11
CCA202 l11
CCA203 l11
CCA204 l11
CCA205 l11
CCA605 l8
CCA606 l8
CCA771 l8
CCA780 l8
CL010 m16
CL011 m16
CL011B m16
CL012 m16
CL012B m16
CL013 m16
CL019 m16
CL022 m20
CL023 m20
CL025 m16
CL035 m18
CL035B m18
CL036 m18
CL036B m18
CL049 m20
CL050 m20
CL051 m20
CL051B m20
CL052 m20
CL053 m20
CL060 m22
CL061 m22
CL083 m22
CL084 m22
CL085 m22
CL086 m22
CL087 m22
CL088 m22
CL105 m16
CL120 m21
CL158 m21
CL200 m20
CL201 m20
CL202 m20
CL203 m20
CL311 k14, m21
CL312 k14, m21
CL401 j15, m17
CL402 j15, m17
CL403 j15, m17
CL404 j15, m17
CL406 j15, m17
CL426 j15, m17
CL512 j5, m17
CL518 j6, m17
CL660 m20
CL660B m20
CL770 m18
CL771U m18
CL780 m18
CL835 m18
CL840 m18
CL1035 m19
CL1035B m19
CL1036 m19
CL1036B m19
CL1835 m19
CL1835B m19
CL1840 m19
CL1840B m19
CL20401 i132
CL20401B i132
CL20402 i132
CL20402B i132
CL20403 i132
CL20403B i132
CL20404 i132
CL20404B i132
CL20506 i133
CL20506B i133
CL20508 i133
CL20508B i133
CL20509 i134
CL20509B i134
CL20512 i134
CL20512B i134
CL20518 i135
CL20518B i135
CL20524 i136
CL20524B i136
CL31102 i132
CL31102B i132
CL-SMART1 a35
CL-SMART2 a35
CL-SMART3 a35
CL-SMART4 a35
CL-SMART6 a35
CMA010 f5
CMA011 f5
CMA011AG h7
CMA012 f5
CMA012AG h7
CMA013 f5
CMA013AG h7
CMA017 f22
CMA019 f5
CMA020 f17
CMA021 f17
CMA022 f18
CMA023 f18
CMA023AG h15
CMA024 f17
CMA025 f6
CMA026 f5, f6
CMA027 f5, f6
CMA030 f12
CMA032 f12
CMA034 f14
CMA035 f12
CMA035AG h12
CMA036 f12
CMA037 f12
CMA038 f14
CMA039 f14
CMA040 f18
CMA042 f18
CMA044 f18
CMA046 f18
CMA049 f16
CMA050 f16
CMA051 f16
CMA052 f16
CMA052AG h15
CMA053 f16
CMA060 f22
CMA061 f22
CMA065 f25
CMA066 f25
CMA080 f27
CMA081 f27
CMA082 f27
CMA083 f27
CMA084 f27
CMA085 f27
CMA086 f27
CMA089 f27
CMA091 f27
CMA100 f22
CMA105 f5
CMA110 f6
CMA115 f24
CMA119 f24
CMA122 f24
CMA124 f24
CMA127 f24
CMA131 f24
CMA132 f24
CMA140 f10
CMA145 f10
CMA145PL f10
CMA146 f10
CMA146PL f10
CMA147 f10
CMA147PL f10
CMA148 f10
CMA148PL f10
CMA156 f25
CMA157 f25
CMA158 f25
CMA159 f25
CMA170 f25
CMA171 f6
CMA172 f6
CMA175 f27
CMA176 f27
CMA200 f19
CMA201 f19
CMA202 f19

CMA203 f19
CMA204 f19
CMA205 f19
CMA213 f21
CMA215 f22, m34
CMA230 f27
CMA235 f27
CMA240 f27
CMA245 f27
CMA310 f26, k13
CMA310AG h17, k13
CMA311 f26, k13
CMA311AG h17, k13
CMA312 f26, k13
CMA312AG h17, k13
CMA401 f7, j13
CMA401AG h8, j13
CMA402 f7, j13
CMA402AG h8, j13
CMA403 f7, j13
CMA403AG h8, j13
CMA404 f7, j13
CMA404AG h8, j13
CMA406 f7, j13
CMA426 f7, j13
CMA426AG h8, j13
CMA432 f7, j13
CMA500 f20
CMA500AG h15
CMA501 f20
CMA501AG h15
CMA502 f20
CMA503 f20
CMA504 f20
CMA505 f20
CMA608 k5
CMA612 f8, j5
CMA616 k6
CMA618 f8, j6
CMA620 f17
CMA622 f18
CMA623 f18
CMA630 f12
CMA635 f12
CMA649 f16
CMA650 f16
CMA651 f16
CMA651AG h15
CMA652 f16
CMA652AG h15
CMA653 f16
CMA660 f18
CMA675 f14
CMA735 f15
CMA735AG h13
CMA736 f15
CMA736AG h13
CMA770 f15
CMA770AG h14
CMA771U f15
CMA771UAG h14
CMA780 f15
CMA780AG h14
CMA811 f5
CMA811AG h7
CMA812 f5
CMA812AG h7
CMA813 f5
CMA813AG h7
CMA825 f5
CMA828 f5
CMA835AG h12
CMA836 f12
CMA836AG h12
CMA836PWRD f12
CMA840 f12
CMA840AG h12
CMA935 f14
CMA936 f14
CMA1035 f13
CMA1036 f13
CMA1037 f13
CMA1635 f13
CMA1835 f13
CMA1836 f13
CMA1840 f13
CMA9014 f5
CMA20401 i120
CMA20402 i120
CMA20403 i120
CMA20404 i120
CMA20506 i121
CMA20508 i121
CMA20509 i122
CMA20512 i122
CMA20518 i123
CMA20524 i124
CMA31102 i120
CMA-SDIM1 a40
CMA-SLCONV a42
CMA-SMART1 a33
CMA-SMART2 a33
CMA-SMART3 a33
CMA-SMART4 a33
CMA-SMART6 a33
CSB040 a15
CT101C n8
CT102C n8
CT103C n8
CT103M n8
CT105C n6
CT105F n6
CT105M n6
CT115C n6
CT115F n6
CT202C n8
CT203C n8
CT203M n8
CT205C n7
CT205F n7
CT205M n7
CT215C n7
CT215F n7
CT300 n5
CT350 n5
CT355 n5
CT732 n9
CT733 n9
CT735 n9
CT742 n9
CT743 n9
CT745 n9
CT802 n9
CT803 n9
CT805 n9
CT845 n9
CT1008 n4
CT1016 n4
CT1300 n5
CT1400 n10
CT1401 n10
CT2300 n5
CV210CH m28
CV210SC m28

D

DB700 m35
DB701 m35
DB750 m35
DB751 m35
DB790 m35
DB791 m35
DB981 m35
DPAB024BK b24
DPAB038BK b22
DPAB039BK b22
DPAB060 b24
DPAB061 b24
DPAB065BK b31
DPAB066BK b31
DPAB100BK b24
DPAB115BK b30
DPAB120BK b30
DPAB121BK b30
DPAB125BK b30
DPAB126BK b30
DPAB140 b14
DPAB152 b14
DPAB153 b14
DPAB154 b14
DPAB156BK b31
DPAB157BK b31
DPAB158BK b31
DPAB159BK b31
DPAB170BK b31
DPAB185 b15
DPAB186 b15
DPAB310 b33, k9
DPAB311 b33, k9
DPAB312 b33, k9
DPAB401BK b11, j9
DPAB402BK b11, j9
DPAB403BK b11, j9
DPAB404BK b11, j9
DPAB406BK b11, j9
DPAB411BK b10
DPAB412BK b10
DPAB413BK b10
DPAB414BK b10
DPAB416BK b10
DPAB421 b13
DPAB422 b13
DPAB423 b13
DPAB424 b13
DPAB425BK b10
DPAB426BK b11, j9
DPAB471BK b11, j9
DPAB472BK b11, j9
DPAB500BK b27
DPAB501BK b27
DPAB502BK b27
DPAB503BK b27
DPAB504BK b27
DPAB505BK b27
DPAB512 b18, j8
DPAB518 b18, j8
DPAB520BK b26
DPAB522BK b26
DPAB523BK b26
DPAB535BK b22
DPAB536BK b22
DPAB550BK b25
DPAB551BK b25
DPAB552BK b25
DPAB553BK b25
DPAB570BK b23
DPAB571BK b23
DPAB580BK b23
DPAB655BK b28
DPAB660 b28
DPAB722BK b26
DPAB723BK b26
DPAB750BK b25
DPAB751BK b25
DPAB752BK b25
DPAB753BK b25
DPAB836BK b22
DPAB1535BK b22
DPAB1536BK b22
DPAB1836BK b22
DPAB20401 i85
DPAB20402 i85
DPAB20403 i86

DPAB20404	**i86**	DPBN501BK	**b27**	DPBR100BK	**b24**	DPBR471BK	**b11, j9**
DPAB20506	**i88**	DPBN502BK	**b27**	DPBR100WH	**b24**	DPBR471WH	**b11, j9**
DPAB20508	**i88**	DPBN503BK	**b27**	DPBR115BK	**b30**	DPBR472BK	**b11, j9**
DPAB20509	**i89**	DPBN504BK	**b27**	DPBR115WH	**b30**	DPBR472WH	**b11, j9**
DPAB20512	**i89**	DPBN505BK	**b27**	DPBR120BK	**b30**	DPBR500BK	**b27**
DPAB20518	**i90**	DPBN512	**b18, j8**	DPBR120WH	**b30**	DPBR500WH	**b27**
DPAB20524	**i91**	DPBN518	**b18, j8**	DPBR121BK	**b30**	DPBR501BK	**b27**
DPAB31102	**i87**	DPBN520BK	**b26**	DPBR121WH	**b30**	DPBR501WH	**b27**
DPABBK-SMART1	**a27**	DPBN522BK	**b26**	DPBR125BK	**b30**	DPBR502BK	**b27**
DPABBK-SMART2	**a27**	DPBN523BK	**b26**	DPBR125WH	**b30**	DPBR502WH	**b27**
DPABBK-SMART3	**a27**	DPBN535BK	**b22**	DPBR126BK	**b30**	DPBR503BK	**b27**
DPABBK-SMART4	**a27**	DPBN536BK	**b22**	DPBR126WH	**b30**	DPBR503WH	**b27**
DPABBK-SMART6	**a27**	DPBN550BK	**b25**	DPBR140	**b14**	DPBR504BK	**b27**
DPBN024BK	**b24**	DPBN551BK	**b25**	DPBR152	**b14**	DPBR504WH	**b27**
DPBN038BK	**b22**	DPBN552BK	**b25**	DPBR153	**b14**	DPBR505BK	**b27**
DPBN039BK	**b22**	DPBN553BK	**b25**	DPBR154	**b14**	DPBR505WH	**b27**
DPBN060	**b24**	DPBN570BK	**b23**	DPBR156BK	**b31**	DPBR512	**b18, j8**
DPBN061	**b24**	DPBN571BK	**b23**	DPBR156WH	**b31**	DPBR518	**b18, j8**
DPBN065BK	**b31**	DPBN580BK	**b23**	DPBR157BK	**b31**	DPBR520BK	**b26**
DPBN066BK	**b31**	DPBN655BK	**b28**	DPBR157WH	**b31**	DPBR520WH	**b26**
DPBN100BK	**b24**	DPBN660	**b28**	DPBR158BK	**b31**	DPBR522BK	**b26**
DPBN115BK	**b30**	DPBN722BK	**b26**	DPBR158WH	**b31**	DPBR522WH	**b26**
DPBN120BK	**b30**	DPBN723BK	**b26**	DPBR159BK	**b31**	DPBR523BK	**b26**
DPBN121BK	**b30**	DPBN750BK	**b25**	DPBR159WH	**b31**	DPBR523WH	**b26**
DPBN125BK	**b30**	DPBN751BK	**b25**	DPBR170BK	**b31**	DPBR535BK	**b22**
DPBN126BK	**b30**	DPBN752BK	**b25**	DPBR170WH	**b31**	DPBR535WH	**b22**
DPBN140	**b14**	DPBN753BK	**b25**	DPBR185	**b15**	DPBR536BK	**b22**
DPBN152	**b14**	DPBN836BK	**b22**	DPBR186	**b15**	DPBR536WH	**b22**
DPBN153	**b14**	DPBN1535BK	**b22**	DPBR310	**b33, k9**	DPBR550BK	**b25**
DPBN154	**b14**	DPBN1536BK	**b22**	DPBR311	**b33, k9**	DPBR550WH	**b25**
DPBN156BK	**b31**	DPBN1836BK	**b22**	DPBR312	**b33, k9**	DPBR551BK	**b25**
DPBN157BK	**b31**	DPBN20401	**i85**	DPBR401BK	**b11, j9**	DPBR551WH	**b25**
DPBN158BK	**b31**	DPBN20402	**i85**	DPBR401WH	**b11, j9**	DPBR552BK	**b25**
DPBN159BK	**b31**	DPBN20403	**i86**	DPBR402BK	**b11, j9**	DPBR552WH	**b25**
DPBN170BK	**b31**	DPBN20404	**i86**	DPBR402WH	**b11, j9**	DPBR553BK	**b25**
DPBN185	**b15**	DPBN20506	**i88**	DPBR403BK	**b11, j9**	DPBR553WH	**b25**
DPBN186	**b15**	DPBN20508	**i88**	DPBR403WH	**b11, j9**	DPBR570BK	**b23**
DPBN310	**b33, k9**	DPBN20509	**i89**	DPBR404BK	**b11, j9**	DPBR570WH	**b23**
DPBN311	**b33, k9**	DPBN20512	**i89**	DPBR404WH	**b11, j9**	DPBR571BK	**b23**
DPBN312	**b33, k9**	DPBN20518	**i90**	DPBR406BK	**b11, j9**	DPBR571WH	**b23**
DPBN401BK	**b11, j9**	DPBN20524	**i91**	DPBR406WH	**b11, j9**	DPBR580BK	**b23**
DPBN402BK	**b11, j9**	DPBN31102	**i87**	DPBR411BK	**b10**	DPBR580WH	**b23**
DPBN403BK	**b11, j9**	DPBNBK-SMART1	**a27**	DPBR411WH	**b10**	DPBR655BK	**b28**
DPBN404BK	**b11, j9**	DPBNBK-SMART2	**a27**	DPBR412BK	**b10**	DPBR655WH	**b28**
DPBN406BK	**b11, j9**	DPBNBK-SMART3	**a27**	DPBR412WH	**b10**	DPBR660	**b28**
DPBN411BK	**b10**	DPBNBK-SMART4	**a27**	DPBR413BK	**b10**	DPBR722BK	**b26**
DPBN412BK	**b10**	DPBNBK-SMART6	**a27**	DPBR413WH	**b10**	DPBR722WH	**b26**
DPBN413BK	**b10**	DPBR024BK	**b24**	DPBR414BK	**b10**	DPBR723BK	**b26**
DPBN414BK	**b10**	DPBR024WH	**b24**	DPBR414WH	**b10**	DPBR723WH	**b26**
DPBN416BK	**b10**	DPBR038BK	**b22**	DPBR416BK	**b10**	DPBR750BK	**b25**
DPBN421	**b13**	DPBR038WH	**b22**	DPBR416WH	**b10**	DPBR750WH	**b25**
DPBN422	**b13**	DPBR039BK	**b22**	DPBR421	**b13**	DPBR751BK	**b25**
DPBN423	**b13**	DPBR039WH	**b22**	DPBR422	**b13**	DPBR751WH	**b25**
DPBN424	**b13**	DPBR060	**b24**	DPBR423	**b13**	DPBR752BK	**b25**
DPBN425BK	**b10**	DPBR061	**b24**	DPBR424	**b13**	DPBR752WH	**b25**
DPBN426BK	**b11, j9**	DPBR065BK	**b31**	DPBR425BK	**b10**	DPBR753BK	**b25**
DPBN471BK	**b11, j9**	DPBR065WH	**b31**	DPBR425WH	**b10**	DPBR753WH	**b25**
DPBN472BK	**b11, j9**	DPBR066BK	**b31**	DPBR426BK	**b11, j9**	DPBR836BK	**b22**
DPBN500BK	**b27**	DPBR066WH	**b31**	DPBR426WH	**b11, j9**	DPBR836WH	**b22**

DPBR1535BK **b22**
DPBR1535WH **b22**
DPBR1536BK **b22**
DPBR1536WH **b22**
DPBR1836BK **b22**
DPBR1836WH **b22**
DPBR20401 **i85**
DPBR20402 **i85**
DPBR20403 **i86**
DPBR20404 **i86**
DPBR20506 **i88**
DPBR20508 **i88**
DPBR20509 **i89**
DPBR20512 **i89**
DPBR20518 **i90**
DPBR20524 **i91**
DPBR31102 **i87**
DPBRBK-SMART1 **a27**
DPBRBK-SMART2 **a27**
DPBRBK-SMART3 **a27**
DPBRBK-SMART4 **a27**
DPBRBK-SMART6 **a27**
DPBRWH-SMART1 **a27**
DPBRWH-SMART2 **a27**
DPBRWH-SMART3 **a27**
DPBRWH-SMART4 **a27**
DPBRWH-SMART6 **a27**
DPCH024BK **b24**
DPCH024WH **b24**
DPCH038BK **b22**
DPCH038WH **b22**
DPCH039BK **b22**
DPCH039WH **b22**
DPCH060 **b24**
DPCH061 **b24**
DPCH065BK **b31**
DPCH065WH **b31**
DPCH066BK **b31**
DPCH066WH **b31**
DPCH100BK **b24**
DPCH100WH **b24**
DPCH115BK **b30**
DPCH115WH **b30**
DPCH120BK **b30**
DPCH120WH **b30**
DPCH121BK **b30**
DPCH121WH **b30**
DPCH125BK **b30**
DPCH125WH **b30**
DPCH126BK **b30**
DPCH126WH **b30**
DPCH140 **b14**
DPCH140PL **b15**
DPCH152 **b14**
DPCH152PL **b15**
DPCH153 **b14**
DPCH153PL **b15**
DPCH154 **b14**
DPCH154PL **b15**
DPCH156BK **b31**
DPCH156WH **b31**
DPCH157BK **b31**
DPCH157WH **b31**
DPCH158BK **b31**
DPCH158WH **b31**
DPCH159BK **b31**
DPCH159WH **b31**
DPCH170BK **b31**
DPCH170WH **b31**
DPCH185 **b15**
DPCH186 **b15**
DPCH310 **b33, k9**
DPCH311 **b33, k9**
DPCH312 **b33, k9**
DPCH401BK **b11, j9**
DPCH401WH **b11, j9**
DPCH402BK **b11, j9**
DPCH402WH **b11, j9**
DPCH403BK **b11, j9**
DPCH403WH **b11, j9**
DPCH404BK **b11, j9**
DPCH404WH **b11, j9**
DPCH406BK **b11, j9**
DPCH406WH **b11, j9**
DPCH411BK **b10**
DPCH411WH **b10**
DPCH412BK **b10**
DPCH412WH **b10**
DPCH413BK **b10**
DPCH413WH **b10**
DPCH414BK **b10**
DPCH414WH **b10**
DPCH416BK **b10**
DPCH416WH **b10**
DPCH421 **b13**
DPCH422 **b13**
DPCH423 **b13**
DPCH424 **b13**
DPCH425BK **b10**
DPCH425WH **b10**
DPCH426BK **b11, j9**
DPCH426WH **b11, j9**
DPCH471BK **b11, j9**
DPCH471WH **b11, j9**
DPCH472BK **b11, j9**
DPCH472WH **b11, j9**
DPCH500BK **b27**
DPCH500WH **b27**
DPCH501BK **b27**
DPCH501WH **b27**
DPCH502BK **b27**
DPCH502WH **b27**
DPCH503BK **b27**
DPCH503WH **b27**
DPCH504BK **b27**
DPCH504WH **b27**
DPCH505BK **b27**
DPCH505WH **b27**
DPCH512 **b18, j8**
DPCH518 **b18, j8**
DPCH520BK **b26**
DPCH520WH **b26**
DPCH522BK **b26**
DPCH522WH **b26**
DPCH523BK **b26**
DPCH523WH **b26**
DPCH535BK **b22**
DPCH535WH **b22**
DPCH536BK **b22**
DPCH536WH **b22**
DPCH550BK **b25**
DPCH550WH **b25**
DPCH551BK **b25**
DPCH551WH **b25**
DPCH552BK **b25**
DPCH552WH **b25**
DPCH553BK **b25**
DPCH553WH **b25**
DPCH570BK **b23**
DPCH570WH **b23**
DPCH571BK **b23**
DPCH571WH **b23**
DPCH580BK **b23**
DPCH580WH **b23**
DPCH655BK **b28**
DPCH655WH **b28**
DPCH660 **b28**
DPCH722BK **b26**
DPCH722WH **b26**
DPCH723BK **b26**
DPCH723WH **b26**
DPCH750BK **b25**
DPCH750WH **b25**
DPCH751BK **b25**
DPCH751WH **b25**
DPCH752BK **b25**
DPCH752WH **b25**
DPCH753BK **b25**
DPCH753WH **b25**
DPCH836BK **b22**
DPCH836WH **b22**
DPCH1535BK **b22**
DPCH1535WH **b22**
DPCH1536BK **b22**
DPCH1536WH **b22**
DPCH1836BK **b22**
DPCH1836WH **b22**
DPCH20401 **i85**
DPCH20402 **i85**
DPCH20403 **i86**
DPCH20404 **i86**
DPCH20506 **i88**
DPCH20508 **i88**
DPCH20509 **i89**
DPCH20512 **i89**
DPCH20518 **i90**
DPCH20524 **i91**
DPCH31102 **i87**
DPCHBK-SMART1 **a27**
DPCHBK-SMART2 **a27**
DPCHBK-SMART3 **a27**
DPCHBK-SMART4 **a27**
DPCHBK-SMART6 **a27**
DPCHWH-SMART1 **a27**
DPCHWH-SMART2 **a27**
DPCHWH-SMART3 **a27**
DPCHWH-SMART4 **a27**
DPCHWH-SMART6 **a27**
DPSB024BK **b24**
DPSB024WH **b24**
DPSB038BK **b22**
DPSB038WH **b22**
DPSB039BK **b22**
DPSB039WH **b22**
DPSB060 **b24**
DPSB061 **b24**
DPSB065BK **b31**
DPSB065WH **b31**
DPSB066BK **b31**
DPSB066WH **b31**
DPSB100BK **b24**
DPSB100WH **b24**
DPSB115BK **b30**
DPSB115WH **b30**
DPSB120BK **b30**
DPSB120WH **b30**
DPSB121BK **b30**
DPSB121WH **b30**
DPSB125BK **b30**
DPSB125WH **b30**
DPSB126BK **b30**
DPSB126WH **b30**
DPSB140 **b14**
DPSB152 **b14**
DPSB153 **b14**
DPSB154 **b14**
DPSB156BK **b31**
DPSB156WH **b31**
DPSB157BK **b31**
DPSB157WH **b31**
DPSB158BK **b31**
DPSB158WH **b31**
DPSB159BK **b31**
DPSB159WH **b31**
DPSB170BK **b31**
DPSB170WH **b31**
DPSB185 **b15**
DPSB186 **b15**
DPSB310 **b33, k9**
DPSB311 **b33, k9**
DPSB312 **b33, k9**
DPSB401BK **b11, j9**
DPSB401WH **b11, j9**
DPSB402BK **b11, j9**
DPSB402WH **b11, j9**
DPSB403BK **b11, j9**

DPSB403WH	b11, j9	DPSB570BK	b23	DPSC065WH	b31	DPSC421	b13
DPSB404BK	b11, j9	DPSB570WH	b23	DPSC066BK	b31	DPSC422	b13
DPSB404WH	b11, j9	DPSB571BK	b23	DPSC066WH	b31	DPSC423	b13
DPSB406BK	b11, j9	DPSB571WH	b23	DPSC100BK	b24	DPSC424	b13
DPSB406WH	b11, j9	DPSB580BK	b23	DPSC100WH	b24	DPSC425BK	b10
DPSB411BK	b10	DPSB580WH	b23	DPSC115BK	b30	DPSC425WH	b10
DPSB411WH	b10	DPSB655BK	b28	DPSC115WH	b30	DPSC426BK	b11, j9
DPSB412BK	b10	DPSB655WH	b28	DPSC120BK	b30	DPSC426WH	b11, j9
DPSB412WH	b10	DPSB660	b28	DPSC120WH	b30	DPSC471BK	b11, j9
DPSB413BK	b10	DPSB722BK	b26	DPSC121BK	b30	DPSC471WH	b11, j9
DPSB413WH	b10	DPSB722WH	b26	DPSC121WH	b30	DPSC472BK	b11, j9
DPSB414BK	b10	DPSB723BK	b26	DPSC125BK	b30	DPSC472WH	b11, j9
DPSB414WH	b10	DPSB723WH	b26	DPSC125WH	b30	DPSC500BK	b27
DPSB416BK	b10	DPSB750BK	b25	DPSC126BK	b30	DPSC500WH	b27
DPSB416WH	b10	DPSB750WH	b25	DPSC126WH	b30	DPSC501BK	b27
DPSB421	b13	DPSB751BK	b25	DPSC136BK	b22	DPSC501WH	b27
DPSB422	b13	DPSB751WH	b25	DPSC140	b14	DPSC502BK	b27
DPSB423	b13	DPSB752BK	b25	DPSC140PL	b15	DPSC502WH	b27
DPSB424	b13	DPSB752WH	b25	DPSC152	b14	DPSC503BK	b27
DPSB425BK	b10	DPSB753BK	b25	DPSC152PL	b15	DPSC503WH	b27
DPSB425WH	b10	DPSB753WH	b25	DPSC153	b14	DPSC504BK	b27
DPSB426BK	b11, j9	DPSB836BK	b22	DPSC153PL	b15	DPSC504WH	b27
DPSB426WH	b11, j9	DPSB836WH	b22	DPSC154	b14	DPSC505BK	b27
DPSB471BK	b11, j9	DPSB1535BK	b22	DPSC154PL	b15	DPSC505WH	b27
DPSB471WH	b11, j9	DPSB1535WH	b22	DPSC156BK	b31	DPSC512	b18, j8
DPSB472BK	b11, j9	DPSB1536BK	b22	DPSC156WH	b31	DPSC518	b18, j8
DPSB472WH	b11, j9	DPSB1536WH	b22	DPSC157BK	b31	DPSC520BK	b26
DPSB500BK	b27	DPSB1836BK	b22	DPSC157WH	b31	DPSC520WH	b26
DPSB500WH	b27	DPSB1836WH	b22	DPSC158BK	b31	DPSC522BK	b26
DPSB501BK	b27	DPSB20401	i85	DPSC158WH	b31	DPSC522WH	b26
DPSB501WH	b27	DPSB20402	i85	DPSC159BK	b31	DPSC523BK	b26
DPSB502BK	b27	DPSB20403	i86	DPSC159WH	b31	DPSC523WH	b26
DPSB502WH	b27	DPSB20404	i86	DPSC170BK	b31	DPSC535BK	b22
DPSB503BK	b27	DPSB20506	i88	DPSC170WH	b31	DPSC535WH	b22
DPSB503WH	b27	DPSB20508	i88	DPSC185	b15	DPSC536BK	b22
DPSB504BK	b27	DPSB20509	i89	DPSC186	b15	DPSC536WH	b22
DPSB504WH	b27	DPSB20512	i89	DPSC310	b33, k9	DPSC550BK	b25
DPSB505BK	b27	DPSB20518	i90	DPSC311	b33, k9	DPSC550WH	b25
DPSB505WH	b27	DPSB20524	i91	DPSC312	b33, k9	DPSC551BK	b25
DPSB512	b18, j8	DPSB31102	i87	DPSC401BK	b11, j9	DPSC551WH	b25
DPSB518	b18, j8	DPSBBK-SMART1	a27	DPSC401WH	b11, j9	DPSC552BK	b25
DPSB520BK	b26	DPSBBK-SMART2	a27	DPSC402BK	b11, j9	DPSC552WH	b25
DPSB520WH	b26	DPSBBK-SMART3	a27	DPSC402WH	b11, j9	DPSC553BK	b25
DPSB522BK	b26	DPSBBK-SMART4	a27	DPSC403BK	b11, j9	DPSC553WH	b25
DPSB522WH	b26	DPSBBK-SMART6	a27	DPSC403WH	b11, j9	DPSC570BK	b23
DPSB523BK	b26	DPSBWH-SMART1	a27	DPSC404BK	b11, j9	DPSC570WH	b23
DPSB523WH	b26	DPSBWH-SMART2	a27	DPSC404WH	b11, j9	DPSC571BK	b23
DPSB535BK	b22	DPSBWH-SMART3	a27	DPSC406BK	b11, j9	DPSC571WH	b23
DPSB535WH	b22	DPSBWH-SMART4	a27	DPSC406WH	b11, j9	DPSC580BK	b23
DPSB536BK	b22	DPSBWH-SMART6	a27	DPSC411BK	b10	DPSC580WH	b23
DPSB536WH	b22	DPSC024BK	b24	DPSC411WH	b10	DPSC655BK	b28
DPSB550BK	b25	DPSC024WH	b24	DPSC412BK	b10	DPSC655WH	b28
DPSB550WH	b25	DPSC038BK	b22	DPSC412WH	b10	DPSC660	b28
DPSB551BK	b25	DPSC038WH	b22	DPSC413BK	b10	DPSC722BK	b26
DPSB551WH	b25	DPSC039BK	b22	DPSC413WH	b10	DPSC722WH	b26
DPSB552BK	b25	DPSC039WH	b22	DPSC414BK	b10	DPSC723BK	b26
DPSB552WH	b25	DPSC060	b24	DPSC414WH	b10	DPSC723WH	b26
DPSB553BK	b25	DPSC061	b24	DPSC416BK	b10	DPSC750BK	b25
DPSB553WH	b25	DPSC065BK	b31	DPSC416WH	b10	DPSC750WH	b25

DPSC751BK b25
DPSC751WH b25
DPSC752BK b25
DPSC752WH b25
DPSC753BK b25
DPSC753WH b25
DPSC836BK b22
DPSC836WH b22
DPSC1535BK b22
DPSC1535WH b22
DPSC1536WH b22
DPSC1836BK b22
DPSC1836WH b22
DPSC20401 i85
DPSC20402 i85
DPSC20403 i86
DPSC20404 i86
DPSC20506 i88
DPSC20508 i88
DPSC20509 i89
DPSC20512 i89
DPSC20518 i90
DPSC20524 i91
DPSC31102 i87
DPSCBK-SMART1 a27
DPSCBK-SMART2 a27
DPSCBK-SMART3 a27
DPSCBK-SMART4 a27
DPSCBK-SMART6 a27
DPSCWH-SMART1 a27
DPSCWH-SMART2 a27
DPSCWH-SMART3 a27
DPSCWH-SMART4 a27
DPSCWH-SMART6 a27
DPSS024BK b24
DPSS024WH b24
DPSS038BK b22
DPSS038WH b22
DPSS039BK b22
DPSS039WH b22
DPSS060 b24
DPSS061 b24
DPSS065BK b31
DPSS065WH b31
DPSS066BK b31
DPSS066WH b31
DPSS100BK b24
DPSS100WH b24
DPSS115BK b30
DPSS115WH b30
DPSS120BK b30
DPSS120WH b30
DPSS121BK b30
DPSS121WH b30
DPSS125BK b30
DPSS125WH b30
DPSS126BK b30
DPSS126WH b30
DPSS140 b14
DPSS152 b14
DPSS153 b14
DPSS154 b14
DPSS156BK b31
DPSS156WH b31
DPSS157BK b31
DPSS157WH b31
DPSS158BK b31
DPSS158WH b31
DPSS159BK b31
DPSS159WH b31
DPSS170BK b31
DPSS170WH b31
DPSS185 b15
DPSS186 b15
DPSS310 b33, k9
DPSS311 b33, k9
DPSS312 b33, k9
DPSS401BK b11, j9
DPSS401WH b11, j9
DPSS402BK b11, j9
DPSS402WH b11, j9
DPSS403BK b11, j9
DPSS403WH b11, j9
DPSS404BK b11, j9
DPSS404WH b11, j9
DPSS406BK b11, j9
DPSS406WH b11, j9
DPSS411BK b10
DPSS411WH b10
DPSS412BK b10
DPSS412WH b10
DPSS413BK b10
DPSS413WH b10
DPSS414BK b10
DPSS414WH b10
DPSS416BK b10
DPSS416WH b10
DPSS421 b13
DPSS422 b13
DPSS423 b13
DPSS424 b13
DPSS425BK b10
DPSS425WH b10
DPSS426BK b11, j9
DPSS426WH b11, j9
DPSS471BK b11, j9
DPSS471WH b11, j9
DPSS472BK b11, j9
DPSS472WH b11, j9
DPSS500BK b27
DPSS500WH b27
DPSS501BK b27
DPSS501WH b27
DPSS502BK b27
DPSS502WH b27
DPSS503BK b27
DPSS503WH b27
DPSS504BK b27
DPSS504WH b27
DPSS505BK b27
DPSS505WH b27
DPSS512 b18, j8
DPSS518 b18, j8
DPSS520BK b26
DPSS520WH b26
DPSS522BK b26
DPSS522WH b26
DPSS523BK b26
DPSS523WH b26
DPSS535BK b22
DPSS535WH b22
DPSS536BK b22
DPSS536WH b22
DPSS550BK b25
DPSS550WH b25
DPSS551BK b25
DPSS551WH b25
DPSS552BK b25
DPSS552WH b25
DPSS553BK b25
DPSS553WH b25
DPSS570BK b23
DPSS570WH b23
DPSS571BK b23
DPSS571WH b23
DPSS580BK b23
DPSS580WH b23
DPSS655BK b28
DPSS655WH b28
DPSS660 b28
DPSS722BK b26
DPSS722WH b26
DPSS723BK b26
DPSS723WH b26
DPSS750BK b25
DPSS750WH b25
DPSS751BK b25
DPSS751WH b25
DPSS752BK b25
DPSS752WH b25
DPSS753BK b25
DPSS753WH b25
DPSS836BK b22
DPSS836WH b22
DPSS1535BK b22
DPSS1535WH b22
DPSS1536BK b22
DPSS1536WH b22
DPSS1836BK b22
DPSS1836WH b22
DPSS20401 i85
DPSS20402 i85
DPSS20403 i86
DPSS20404 i86
DPSS20506 i88
DPSS20508 i88
DPSS20509 i89
DPSS20512 i89
DPSS20518 i90
DPSS20524 i91
DPSS31102 i87
DPSSBK-SMART1 a27
DPSSBK-SMART2 a27
DPSSBK-SMART3 a27
DPSSBK-SMART4 a27
DPSSBK-SMART6 a27
DPSSWH-SMART1 a27
DPSSWH-SMART2 a27
DPSSWH-SMART3 a27
DPSSWH-SMART4 a27
DPSSWH-SMART6 a27

E

ES001 m31
ES002 m31
ES003 m31
ES008 m31

F

FPBN038BK d12
FPBN039BK d12
FPBN060 d17
FPBN061 d17
FPBN065BK d21
FPBN066BK d21
FPBN100BK d17
FPBN115BK d20
FPBN120BK d20
FPBN121BK d20
FPBN125BK d20
FPBN126BK d20
FPBN140 d7
FPBN152 d7
FPBN153 d7
FPBN154 d7
FPBN156BK d21
FPBN157BK d21
FPBN158BK d21
FPBN159BK d21
FPBN185 d8
FPBN186 d8
FPBN200BK d14
FPBN201BK d14
FPBN202BK d14
FPBN203BK d14
FPBN204BK d14
FPBN205BK d14
FPBN310 d22, k11
FPBN311 d22, k11
FPBN312 d22, k11
FPBN401BK d6, j11

FPBN402BK	d6, j11	FPBS060	d17	FPBS406BK	d6, j11	FPBS753BK	d13
FPBN403BK	d6, j11	FPBS061	d17	FPBS406WH	d6, j11	FPBS753WH	d13
FPBN404BK	d6, j11	FPBS065BK	d21	FPBS411BK	d5	FPBS1535BK	d11
FPBN406BK	d6, j11	FPBS065WH	d21	FPBS411WH	d5	FPBS1535WH	d11
FPBN411BK	d5	FPBS066BK	d21	FPBS412BK	d5	FPBS1536BK	d11
FPBN412BK	d5	FPBS066WH	d21	FPBS412WH	d5	FPBS1536WH	d11
FPBN413BK	d5	FPBS100BK	d17	FPBS413BK	d5	FPBS1836BK	d11
FPBN414BK	d5	FPBS100WH	d17	FPBS413WH	d5	FPBS1836WH	d11
FPBN416BK	d5	FPBS115BK	d20	FPBS414BK	d5	FPBS20401	i104
FPBN421	d9	FPBS115WH	d20	FPBS414WH	d5	FPBS20402	i104
FPBN422	d9	FPBS120BK	d20	FPBS416BK	d5	FPBS20403	i105
FPBN423	d9	FPBS120WH	d20	FPBS416WH	d5	FPBS20404	i105
FPBN424	d9	FPBS121BK	d20	FPBS421	d9	FPBS20506	i107
FPBN425BK	d5	FPBS121WH	d20	FPBS422	d9	FPBS20508	i107
FPBN426BK	d6, j11	FPBS125BK	d20	FPBS423	d9	FPBS20509	i108
FPBN500BK	d15	FPBS125WH	d20	FPBS424	d9	FPBS20512	i108
FPBN501BK	d15	FPBS126BK	d20	FPBS425BK	d5	FPBS20518	i109
FPBN502BK	d15	FPBS126WH	d20	FPBS425WH	d5	FPBS20524	i110
FPBN503BK	d15	FPBS140	d7	FPBS426BK	d6, j11	FPBS31102	i106
FPBN504BK	d15	FPBS140PL	d8	FPBS426WH	d6, j11	FPBSBK-SMART1	a29
FPBN505BK	d15	FPBS152	d7	FPBS500BK	d15	FPBSBK-SMART2	a29
FPBN535BK	d11	FPBS152PL	d8	FPBS500WH	d15	FPBSBK-SMART3	a29
FPBN536BK	d11	FPBS153	d7	FPBS501BK	d15	FPBSBK-SMART4	a29
FPBN550BK	d13	FPBS153PL	d8	FPBS501WH	d15	FPBSBK-SMART6	a29
FPBN551BK	d13	FPBS154	d7	FPBS502BK	d15	FPBSWH-SMART1	a29
FPBN552BK	d13	FPBS154PL	d8	FPBS502WH	d15	FPBSWH-SMART2	a29
FPBN553BK	d13	FPBS156BK	d21	FPBS503BK	d15	FPBSWH-SMART3	a29
FPBN570BK	d12	FPBS156WH	d21	FPBS503WH	d15	FPBSWH-SMART4	a29
FPBN571UBK	d12	FPBS157BK	d21	FPBS504BK	d15	FPBSWH-SMART6	a29
FPBN580BK	d12	FPBS157WH	d21	FPBS504WH	d15	FPCH038BK	d12
FPBN655BK	d12	FPBS158BK	d21	FPBS505BK	d15	FPCH038WH	d12
FPBN660	d16	FPBS158WH	d21	FPBS505WH	d15	FPCH039BK	d12
FPBN750BK	d13	FPBS159BK	d21	FPBS535BK	d11	FPCH039WH	d12
FPBN751BK	d13	FPBS159WH	d21	FPBS535WH	d11	FPCH060	d17
FPBN752BK	d13	FPBS185	d8	FPBS536BK	d11	FPCH061	d17
FPBN753BK	d13	FPBS186	d8	FPBS536WH	d11	FPCH065BK	d21
FPBN1535BK	d11	FPBS200BK	d14	FPBS550BK	d13	FPCH065WH	d21
FPBN1536BK	d11	FPBS200WH	d14	FPBS550WH	d13	FPCH066BK	d21
FPBN1836BK	d11	FPBS201BK	d14	FPBS551BK	d13	FPCH066WH	d21
FPBN20401	i104	FPBS201WH	d14	FPBS551WH	d13	FPCH100BK	d17
FPBN20402	i104	FPBS202BK	d14	FPBS552BK	d13	FPCH100WH	d17
FPBN20403	i105	FPBS202WH	d14	FPBS552WH	d13	FPCH115BK	d20
FPBN20404	i105	FPBS203BK	d14	FPBS553BK	d13	FPCH115WH	d20
FPBN20506	i107	FPBS203WH	d14	FPBS553WH	d13	FPCH120BK	d20
FPBN20508	i107	FPBS204BK	d14	FPBS570BK	d12	FPCH120WH	d20
FPBN20509	i108	FPBS204WH	d14	FPBS570WH	d12	FPCH121BK	d20
FPBN20512	i108	FPBS205BK	d14	FPBS571UBK	d12	FPCH121WH	d20
FPBN20518	i109	FPBS205WH	d14	FPBS571UWH	d12	FPCH125BK	d20
FPBN20524	i110	FPBS310	d22, k11	FPBS580BK	d12	FPCH125WH	d20
FPBN31102	i106	FPBS311	d22, k11	FPBS580WH	d12	FPCH126BK	d20
FPBNBK-SMART1	a29	FPBS312	d22, k11	FPBS655BK	d12	FPCH126WH	d20
FPBNBK-SMART2	a29	FPBS401BK	d6, j11	FPBS655WH	d12	FPCH140	d7
FPBNBK-SMART3	a29	FPBS401WH	d6, j11	FPBS660	d16	FPCH140PL	d8
FPBNBK-SMART4	a29	FPBS402BK	d6, j11	FPBS750BK	d13	FPCH152	d7
FPBNBK-SMART6	a29	FPBS402WH	d6, j11	FPBS750WH	d13	FPCH152PL	d8
FPBS038BK	d12	FPBS403BK	d6, j11	FPBS751BK	d13	FPCH153	d7
FPBS038WH	d12	FPBS403WH	d6, j11	FPBS751WH	d13	FPCH153PL	d8
FPBS039BK	d12	FPBS404BK	d6, j11	FPBS752BK	d13	FPCH154	d7
FPBS039WH	d12	FPBS404WH	d6, j11	FPBS752WH	d13	FPCH154PL	d8

FPCH156BK **d21**
FPCH156WH **d21**
FPCH157BK **d21**
FPCH157WH **d21**
FPCH158BK **d21**
FPCH158WH **d21**
FPCH159BK **d21**
FPCH159WH **d21**
FPCH185 **d8**
FPCH186 **d8**
FPCH200BK **d14**
FPCH200WH **d14**
FPCH201BK **d14**
FPCH201WH **d14**
FPCH202BK **d14**
FPCH202WH **d14**
FPCH203BK **d14**
FPCH203WH **d14**
FPCH204BK **d14**
FPCH204WH **d14**
FPCH205BK **d14**
FPCH205WH **d14**
FPCH310 **d22, k11**
FPCH311 **d22, k11**
FPCH312 **d22, k11**
FPCH401BK **d6, j11**
FPCH401WH **d6, j11**
FPCH402BK **d6, j11**
FPCH402WH **d6, j11**
FPCH403BK **d6, j11**
FPCH403WH **d6, j11**
FPCH404BK **d6, j11**
FPCH404WH **d6, j11**
FPCH406BK **d6, j11**
FPCH406WH **d6, j11**
FPCH411BK **d5**
FPCH411WH **d5**
FPCH412BK **d5**
FPCH412WH **d5**
FPCH413BK **d5**
FPCH413WH **d5**
FPCH414BK **d5**
FPCH414WH **d5**
FPCH416BK **d5**
FPCH416WH **d5**
FPCH421 **d9**
FPCH422 **d9**
FPCH423 **d9**
FPCH424 **d9**
FPCH425BK **d5**
FPCH425WH **d5**
FPCH426BK **d6, j11**
FPCH426WH **d6, j11**
FPCH500BK **d15**
FPCH500WH **d15**
FPCH501BK **d15**
FPCH501WH **d15**
FPCH502BK **d15**
FPCH502WH **d15**
FPCH503BK **d15**
FPCH503WH **d15**
FPCH504BK **d15**
FPCH504WH **d15**
FPCH505BK **d15**
FPCH505WH **d15**
FPCH535BK **d11**
FPCH535WH **d11**
FPCH536BK **d11**
FPCH536WH **d11**
FPCH550BK **d13**
FPCH550WH **d13**
FPCH551BK **d13**
FPCH551WH **d13**
FPCH552BK **d13**
FPCH552WH **d13**
FPCH553BK **d13**
FPCH553WH **d13**
FPCH570BK **d12**
FPCH570WH **d12**
FPCH571UBK **d12**
FPCH571UWH **d12**
FPCH580BK **d12**
FPCH580WH **d12**
FPCH655BK **d12**
FPCH655WH **d12**
FPCH660 **d16**
FPCH750BK **d13**
FPCH750WH **d13**
FPCH751BK **d13**
FPCH751WH **d13**
FPCH752BK **d13**
FPCH752WH **d13**
FPCH753BK **d13**
FPCH753WH **d13**
FPCH1535BK **d11**
FPCH1535WH **d11**
FPCH1536BK **d11**
FPCH1536WH **d11**
FPCH1836BK **d11**
FPCH1836WH **d11**
FPCH20401 **i104**
FPCH20402 **i104**
FPCH20403 **i105**
FPCH20404 **i105**
FPCH20506 **i107**
FPCH20508 **i107**
FPCH20509 **i108**
FPCH20512 **i108**
FPCH20518 **i109**
FPCH20524 **i110**
FPCH31102 **i106**
FPCHBK-SMART1 **a29**
FPCHBK-SMART2 **a29**
FPCHBK-SMART3 **a29**
FPCHBK-SMART4 **a29**
FPCHBK-SMART6 **a29**
FPCHWH-SMART1 **a29**
FPCHWH-SMART2 **a29**
FPCHWH-SMART3 **a29**
FPCHWH-SMART4 **a29**
FPCHWH-SMART6 **a29**
FPPN038BK **d12**
FPPN038WH **d12**
FPPN039BK **d12**
FPPN039WH **d12**
FPPN060 **d17**
FPPN061 **d17**
FPPN065BK **d21**
FPPN065WH **d21**
FPPN066BK **d21**
FPPN066WH **d21**
FPPN100BK **d17**
FPPN100WH **d17**
FPPN115BK **d20**
FPPN115WH **d20**
FPPN120BK **d20**
FPPN120WH **d20**
FPPN121BK **d20**
FPPN121WH **d20**
FPPN125BK **d20**
FPPN125WH **d20**
FPPN126BK **d20**
FPPN126WH **d20**
FPPN140 **d7**
FPPN152 **d7**
FPPN153 **d7**
FPPN154 **d7**
FPPN156BK **d21**
FPPN156WH **d21**
FPPN157BK **d21**
FPPN157WH **d21**
FPPN158BK **d21**
FPPN158WH **d21**
FPPN159BK **d21**
FPPN159WH **d21**
FPPN185 **d8**
FPPN186 **d8**
FPPN200BK **d14**
FPPN200WH **d14**
FPPN201BK **d14**
FPPN201WH **d14**
FPPN202BK **d14**
FPPN202WH **d14**
FPPN203BK **d14**
FPPN203WH **d14**
FPPN204BK **d14**
FPPN204WH **d14**
FPPN205BK **d14**
FPPN205WH **d14**
FPPN310 **d22, k11**
FPPN311 **d22, k11**
FPPN312 **d22, k11**
FPPN401BK **d6, j11**
FPPN401WH **d6, j11**
FPPN402BK **d6, j11**
FPPN402WH **d6, j11**
FPPN403BK **d6, j11**
FPPN403WH **d6, j11**
FPPN404BK **d6, j11**
FPPN404WH **d6, j11**
FPPN406BK **d6, j11**
FPPN406WH **d6, j11**
FPPN411BK **d5**
FPPN411WH **d5**
FPPN412BK **d5**
FPPN412WH **d5**
FPPN413BK **d5**
FPPN413WH **d5**
FPPN414BK **d5**
FPPN414WH **d5**
FPPN416BK **d5**
FPPN416WH **d5**
FPPN421 **d9**
FPPN422 **d9**
FPPN423 **d9**
FPPN424 **d9**
FPPN425BK **d5**
FPPN425WH **d5**
FPPN426BK **d6, j11**
FPPN426WH **d6, j11**
FPPN500BK **d15**
FPPN500WH **d15**
FPPN501BK **d15**
FPPN501WH **d15**
FPPN502BK **d15**
FPPN502WH **d15**
FPPN503BK **d15**
FPPN503WH **d15**
FPPN504BK **d15**
FPPN504WH **d15**
FPPN505BK **d15**
FPPN505WH **d15**
FPPN535BK **d11**
FPPN535WH **d11**
FPPN536BK **d11**
FPPN536WH **d11**
FPPN550BK **d13**
FPPN550WH **d13**
FPPN551BK **d13**
FPPN551WH **d13**
FPPN552BK **d13**
FPPN552WH **d13**
FPPN553BK **d13**
FPPN553WH **d13**
FPPN570BK **d12**
FPPN570WH **d12**
FPPN571UBK **d12**
FPPN571UWH **d12**
FPPN580BK **d12**
FPPN580WH **d12**
FPPN655BK **d12**
FPPN655WH **d12**
FPPN660 **d16**
FPPN750BK **d13**
FPPN750WH **d13**
FPPN751BK **d13**

FPPN751WH **d13**
FPPN752BK **d13**
FPPN752WH **d13**
FPPN753BK **d13**
FPPN753WH **d13**
FPPN1535BK **d11**
FPPN1535WH **d11**
FPPN1536BK **d11**
FPPN1536WH **d11**
FPPN1836BK **d11**
FPPN1836WH **d11**
FPPN20401 **i104**
FPPN20402 **i104**
FPPN20403 **i105**
FPPN20404 **i105**
FPPN20506 **i107**
FPPN20508 **i107**
FPPN20509 **i108**
FPPN20512 **i108**
FPPN20518 **i109**
FPPN20524 **i110**
FPPN31102 **i106**
FPPNBK-SMART1 **a29**
FPPNBK-SMART2 **a29**
FPPNBK-SMART3 **a29**
FPPNBK-SMART4 **a29**
FPPNBK-SMART6 **a29**
FPPNWH-SMART1 **a29**
FPPNWH-SMART2 **a29**
FPPNWH-SMART3 **a29**
FPPNWH-SMART4 **a29**
FPPNWH-SMART6 **a29**
FPSS038BK **d12**
FPSS038WH **d12**
FPSS039BK **d12**
FPSS039WH **d12**
FPSS060 **d17**
FPSS061 **d17**
FPSS065BK **d21**
FPSS065WH **d21**
FPSS066BK **d21**
FPSS066WH **d21**
FPSS100BK **d17**
FPSS100WH **d17**
FPSS115BK **d20**
FPSS115WH **d20**
FPSS120BK **d20**
FPSS120WH **d20**
FPSS121BK **d20**
FPSS121WH **d20**
FPSS125BK **d20**
FPSS125WH **d20**
FPSS126BK **d20**
FPSS126WH **d20**
FPSS140 **d7**
FPSS152 **d7**
FPSS153 **d7**
FPSS154 **d7**
FPSS156BK **d21**
FPSS156WH **d21**
FPSS157BK **d21**
FPSS157WH **d21**
FPSS158BK **d21**
FPSS158WH **d21**
FPSS159BK **d21**
FPSS159WH **d21**
FPSS185 **d8**
FPSS186 **d8**
FPSS200BK **d14**
FPSS200WH **d14**
FPSS201BK **d14**
FPSS201WH **d14**
FPSS202BK **d14**
FPSS202WH **d14**
FPSS203BK **d14**
FPSS203WH **d14**
FPSS204BK **d14**
FPSS204WH **d14**
FPSS205BK **d14**
FPSS205WH **d14**
FPSS310 **d22, k11**
FPSS311 **d22, k11**
FPSS312 **d22, k11**
FPSS401BK **d6, j11**
FPSS401WH **d6, j11**
FPSS402BK **d6, j11**
FPSS402WH **d6, j11**
FPSS403BK **d6, j11**
FPSS403WH **d6, j11**
FPSS404BK **d6, j11**
FPSS404WH **d6, j11**
FPSS406BK **d6, j11**
FPSS406WH **d6, j11**
FPSS411BK **d5**
FPSS411WH **d5**
FPSS412BK **d5**
FPSS412WH **d5**
FPSS413BK **d5**
FPSS413WH **d5**
FPSS414BK **d5**
FPSS414WH **d5**
FPSS416BK **d5**
FPSS416WH **d5**
FPSS421 **d9**
FPSS422 **d9**
FPSS423 **d9**
FPSS424 **d9**
FPSS425BK **d5**
FPSS425WH **d5**
FPSS426BK **d6, j11**
FPSS426WH **d6, j11**
FPSS500BK **d15**
FPSS500WH **d15**
FPSS501BK **d15**
FPSS501WH **d15**
FPSS502BK **d15**
FPSS502WH **d15**
FPSS503BK **d15**
FPSS503WH **d15**
FPSS504BK **d15**
FPSS504WH **d15**
FPSS505BK **d15**
FPSS505WH **d15**
FPSS535BK **d11**
FPSS535WH **d11**
FPSS536BK **d11**
FPSS536WH **d11**
FPSS550BK **d13**
FPSS550WH **d13**
FPSS551BK **d13**
FPSS551WH **d13**
FPSS552BK **d13**
FPSS552WH **d13**
FPSS553BK **d13**
FPSS553WH **d13**
FPSS570BK **d12**
FPSS570WH **d12**
FPSS571UBK **d12**
FPSS571UWH **d12**
FPSS580BK **d12**
FPSS580WH **d12**
FPSS655BK **d12**
FPSS655WH **d12**
FPSS660 **d16**
FPSS750BK **d13**
FPSS750WH **d13**
FPSS751BK **d13**
FPSS751WH **d13**
FPSS752BK **d13**
FPSS752WH **d13**
FPSS753BK **d13**
FPSS753WH **d13**
FPSS1535BK **d11**
FPSS1535WH **d11**
FPSS1536BK **d11**
FPSS1536WH **d11**
FPSS1836BK **d11**
FPSS1836WH **d11**
FPSS20401 **i104**
FPSS20402 **i104**
FPSS20403 **i105**
FPSS20404 **i105**
FPSS20506 **i107**
FPSS20508 **i107**
FPSS20509 **i108**
FPSS20512 **i108**
FPSS20518 **i109**
FPSS20524 **i110**
FPSS31102 **i106**
FPSSBK-SMART1 **a29**
FPSSBK-SMART2 **a29**
FPSSBK-SMART3 **a29**
FPSSBK-SMART4 **a29**
FPSSBK-SMART6 **a29**
FPSSWH-SMART1 **a29**
FPSSWH-SMART2 **a29**
FPSSWH-SMART3 **a29**
FPSSWH-SMART4 **a29**
FPSSWH-SMART6 **a29**
FS030SS **m26**
FS032SS **m26**
FS311SS **k14, m26**
FS312SS **k14, m26**
FU021 **m37**
FU022 **m37**
FU023 **m37**
FU030 **m37**
FU031 **m37**
FU032 **m37**
FU035 **m37**
FU036 **m37**
FU037 **m37**
FU038 **m37**

G

GA100 **c30, d24, e54, f28, g26, h20, l17, m7**
GCBR011BK **c5**
GCBR011WH **c5**
GCBR012BK **c5**
GCBR012WH **c5**
GCBR013BK **c5**
GCBR013WH **c5**
GCBR019BK **c5**
GCBR019WH **c5**
GCBR020BK **c18**
GCBR020WH **c18**
GCBR022BK **c18**
GCBR022WH **c18**
GCBR023BK **c18**
GCBR023WH **c18**
GCBR024BK **c23**
GCBR024WH **c23**
GCBR025BK **c5**
GCBR025WH **c5**
GCBR035BK **c14**
GCBR035WH **c14**
GCBR036BK **c14**
GCBR036WH **c14**
GCBR038BK **c15**
GCBR038WH **c15**
GCBR039BK **c15**
GCBR039WH **c15**
GCBR050BK **c16**
GCBR050WH **c16**
GCBR051BK **c16**
GCBR051WH **c16**
GCBR052BK **c16**
GCBR052WH **c16**

GCBR053BK	c16	GCBR404WH	c7	GCBR723BK	c19	GM2001BKAB	i26
GCBR053WH	c16	GCBR406BK	c7	GCBR723WH	c19	GM2001BKBN	i26
GCBR060	c23	GCBR406WH	c7	GCBR750BK	c17	GM2001BKBR	i26
GCBR061	c23	GCBR411BK	c6	GCBR750WH	c17	GM2001BKBS	i26
GCBR065BK	c27	GCBR411WH	c6	GCBR751BK	c17	GM2001BKCH	i26
GCBR065WH	c27	GCBR412BK	c6	GCBR751WH	c17	GM2001BKPN	i26
GCBR066BK	c27	GCBR412WH	c6	GCBR752BK	c17	GM2001BKSB	i26
GCBR066WH	c27	GCBR413BK	c6	GCBR752WH	c17	GM2001BKSC	i26
GCBR100BK	c23	GCBR413WH	c6	GCBR753BK	c17	GM2001BKSS	i26
GCBR100WH	c23	GCBR414BK	c6	GCBR753WH	c17	GM2001BTBK	i68
GCBR105BK	c5	GCBR414WH	c6	GCBR770BK	c15	GM2001BTPW	i68
GCBR105WH	c5	GCBR416BK	c6	GCBR770WH	c15	GM2001PW	i26
GCBR115BK	c26	GCBR416WH	c6	GCBR771UBK	c15	GM2001PWBR	i26
GCBR115WH	c26	GCBR421	c12	GCBR771UWH	c15	GM2001PWBS	i26
GCBR120BK	c26	GCBR422	c12	GCBR780BK	c15	GM2001PWCH	i26
GCBR120WH	c26	GCBR423	c12	GCBR780WH	c15	GM2001PWPN	i26
GCBR121BK	c26	GCBR424	c12	GCBR1535BK	c14	GM2001PWSB	i26
GCBR121WH	c26	GCBR425BK	c6	GCBR1535WH	c14	GM2001PWSC	i26
GCBR125BK	c26	GCBR425WH	c6	GCBR1536BK	c14	GM2001PWSS	i26
GCBR125WH	c26	GCBR426BK	c7	GCBR1536WH	c14	GM2002BK	i28
GCBR126BK	c26	GCBR426WH	c7	GCBR1836BK	c14	GM2002BKAB	i28
GCBR126WH	c26	GCBR520BK	c19	GCBR1836WH	c14	GM2002BKBN	i28
GCBR140	c10	GCBR520WH	c19	GM050BK	i78	GM2002BKBR	i28
GCBR152	c10	GCBR522BK	c19	GM050BKAB	i78	GM2002BKBS	i28
GCBR153	c10	GCBR522WH	c19	GM050BKBN	i78	GM2002BKCH	i28
GCBR154	c10	GCBR523BK	c19	GM050BKBR	i78	GM2002BKPN	i28
GCBR156BK	c27	GCBR523WH	c19	GM050BKBS	i78	GM2002BKSB	i28
GCBR156WH	c27	GCBR535BK	c14	GM050BKCH	i78	GM2002BKSC	i28
GCBR157BK	c27	GCBR535WH	c14	GM050BKPN	i78	GM2002BKSS	i28
GCBR157WH	c27	GCBR536BK	c14	GM050BKSB	i78	GM2002BTBK	i68
GCBR158BK	c27	GCBR536WH	c14	GM050BKSC	i78	GM2002BTPW	i68
GCBR158WH	c27	GCBR550BK	c17	GM050BKSS	i78	GM2002PW	i28
GCBR159BK	c27	GCBR550WH	c17	GM050PW	i78	GM2002PWBR	i28
GCBR159WH	c27	GCBR551BK	c17	GM050PWBR	i78	GM2002PWBS	i28
GCBR170BK	c27	GCBR551WH	c17	GM050PWBS	i78	GM2002PWCH	i28
GCBR170WH	c27	GCBR552BK	c17	GM050PWCH	i78	GM2002PWPN	i28
GCBR185	c11	GCBR552WH	c17	GM050PWPN	i78	GM2002PWSB	i28
GCBR186	c11	GCBR553BK	c17	GM050PWSB	i78	GM2002PWSC	i28
GCBR200BK	c20	GCBR553WH	c17	GM050PWSC	i78	GM2002PWSS	i28
GCBR200WH	c20	GCBR570BK	c15	GM050PWSS	i78	GM2003BK	i46
GCBR201BK	c20	GCBR570WH	c15	GM150BK	i80	GM2003BKAB	i46
GCBR201WH	c20	GCBR571UBK	c15	GM150BKAB	i80	GM2003BKBN	i46
GCBR202BK	c20	GCBR571UWH	c15	GM150BKBN	i80	GM2003BKBR	i46
GCBR202WH	c20	GCBR580BK	c15	GM150BKBR	i80	GM2003BKBS	i46
GCBR203BK	c20	GCBR580WH	c15	GM150BKBS	i80	GM2003BKCH	i46
GCBR203WH	c20	GCBR622BK	c18	GM150BKCH	i80	GM2003BKPN	i46
GCBR204BK	c20	GCBR622WH	c18	GM150BKPN	i80	GM2003BKSB	i46
GCBR204WH	c20	GCBR623BK	c18	GM150BKSB	i80	GM2003BKSC	i46
GCBR205BK	c20	GCBR623WH	c18	GM150BKSC	i80	GM2003BKSS	i46
GCBR205WH	c20	GCBR650BK	c16	GM150BKSS	i80	GM2003PW	i46
GCBR311	c28, k10	GCBR650WH	c16	GM150PW	i80	GM2003PWBR	i46
GCBR312	c28, k10	GCBR651BK	c16	GM150PWBR	i80	GM2003PWBS	i46
GCBR401BK	c7	GCBR651WH	c16	GM150PWBS	i80	GM2003PWCH	i46
GCBR401WH	c7	GCBR652BK	c16	GM150PWCH	i80	GM2003PWPN	i46
GCBR402BK	c7	GCBR652WH	c16	GM150PWPN	i80	GM2003PWSB	i46
GCBR402WH	c7	GCBR653BK	c16	GM150PWSB	i80	GM2003PWSC	i46
GCBR403BK	c7	GCBR653WH	c16	GM150PWSC	i80	GM2003PWSS	i46
GCBR403WH	c7	GCBR722BK	c19	GM150PWSS	i80	GM2004BK	i30
GCBR404BK	c7	GCBR722WH	c19	GM2001BK	i26	GM2004BKAB	i30

GM2004BKBN i30
GM2004BKBR i30
GM2004BKBS i30
GM2004BKCH i30
GM2004BKPN i30
GM2004BKSB i30
GM2004BKSC i30
GM2004BKSS i30
GM2004PW i30
GM2004PWBR i30
GM2004PWBS i30
GM2004PWCH i30
GM2004PWPN i30
GM2004PWSB i30
GM2004PWSC i30
GM2004PWSS i30
GM2008BK i62
GM2008BKAB i62
GM2008BKBN i62
GM2008BKBR i62
GM2008BKBS i62
GM2008BKCH i62
GM2008BKPN i62
GM2008BKSB i62
GM2008BKSC i62
GM2008BKSS i62
GM2008GTAB i66
GM2008GTBK i66
GM2008GTBN i66
GM2008GTBR i66
GM2008GTBS i66
GM2008GTCH i66
GM2008GTPN i66
GM2008GTPW i66
GM2008GTSB i66
GM2008GTSC i66
GM2008GTSS i66
GM2008PW i62
GM2008PWBR i62
GM2008PWBS i62
GM2008PWCH i62
GM2008PWPN i62
GM2008PWSB i62
GM2008PWSC i62
GM2008PWSS i62
GM2008RTAB i66
GM2008RTBK i66
GM2008RTBN i66
GM2008RTBR i66
GM2008RTBS i66
GM2008RTCH i66
GM2008RTPN i66
GM2008RTPW i66
GM2008RTSB i66
GM2008RTSC i66
GM2008RTSS i66
GM2014BK i48
GM2014BKAB i48
GM2014BKBN i48
GM2014BKBR i48
GM2014BKBS i48
GM2014BKCH i48
GM2014BKPN i48
GM2014BKSB i48
GM2014BKSC i48
GM2014BKSS i48
GM2014PW i48
GM2014PWBR i48
GM2014PWBS i48
GM2014PWCH i48
GM2014PWPN i48
GM2014PWSB i48
GM2014PWSC i48
GM2014PWSS i48
GM2017BK i60
GM2017BKAB i60
GM2017BKBN i60
GM2017BKBR i60
GM2017BKBS i60
GM2017BKCH i60
GM2017BKPN i60
GM2017BKSB i60
GM2017BKSC i60
GM2017BKSS i60
GM2017PW i60
GM2017PWBR i60
GM2017PWBS i60
GM2017PWCH i60
GM2017PWPN i60
GM2017PWSB i60
GM2017PWSC i60
GM2017PWSS i60
GM2018BK i34
GM2018BKAB i34
GM2018BKAB-BL i36
GM2018BKAB-CH i36
GM2018BKAB-DW i36
GM2018BKAB-FD i36
GM2018BKAB-FF i36
GM2018BKAB-FN i36
GM2018BKAB-FZ i36
GM2018BKAB-HB i36
GM2018BKAB-MW i36
GM2018BKAB-OV i36
GM2018BKAB-TD i36
GM2018BKAB-WD i36
GM2018BKAB-WH i36
GM2018BKAB-WM i36
GM2018BK-BL i36
GM2018BKBN i34
GM2018BKBN-BL i36
GM2018BKBN-CH i36
GM2018BKBN-DW i36
GM2018BKBN-FD i36
GM2018BKBN-FF i36
GM2018BKBN-FN i36
GM2018BKBN-FZ i36
GM2018BKBN-HB i36
GM2018BKBN-MW i36
GM2018BKBN-OV i36
GM2018BKBN-TD i36
GM2018BKBN-WD i36
GM2018BKBN-WH i36
GM2018BKBN-WM i36
GM2018BKBR i34
GM2018BKBR-BL i36
GM2018BKBR-CH i36
GM2018BKBR-DW i36
GM2018BKBR-FD i36
GM2018BKBR-FF i36
GM2018BKBR-FN i36
GM2018BKBR-FZ i36
GM2018BKBR-HB i36
GM2018BKBR-MW i36
GM2018BKBR-OV i36
GM2018BKBR-TD i36
GM2018BKBR-WD i36
GM2018BKBR-WH i36
GM2018BKBR-WM i36
GM2018BKBS i34
GM2018BKBS-BL i36
GM2018BKBS-CH i36
GM2018BKBS-DW i36
GM2018BKBS-FD i36
GM2018BKBS-FF i36
GM2018BKBS-FN i36
GM2018BKBS-FZ i36
GM2018BKBS-HB i36
GM2018BKBS-MW i36
GM2018BKBS-OV i36
GM2018BKBS-TD i36
GM2018BKBS-WD i36
GM2018BKBS-WH i36
GM2018BKBS-WM i36
GM2018BK-CH i36
GM2018BKCH i34
GM2018BKCH-BL i36
GM2018BKCH-CH i36
GM2018BKCH-DW i36
GM2018BKCH-FD i36
GM2018BKCH-FF i36
GM2018BKCH-FN i36
GM2018BKCH-FZ i36
GM2018BKCH-HB i36
GM2018BKCH-MW i36
GM2018BKCH-OV i36
GM2018BKCH-TD i36
GM2018BKCH-WD i36
GM2018BKCH-WH i36
GM2018BKCH-WM i36
GM2018BK-DW i36
GM2018BK-FD i36
GM2018BK-FF i36
GM2018BK-FN i36
GM2018BK-FZ i36
GM2018BK-HB i36
GM2018BK-MW i36

GM2018BK-OV i36
GM2018BKPN i34
GM2018BKPN-BL i36
GM2018BKPN-CH i36
GM2018BKPN-DW i36
GM2018BKPN-FD i36
GM2018BKPN-FF i36
GM2018BKPN-FN i36
GM2018BKPN-FZ i36
GM2018BKPN-HB i36
GM2018BKPN-MW i36
GM2018BKPN-OV i36
GM2018BKPN-TD i36
GM2018BKPN-WD i36
GM2018BKPN-WH i36
GM2018BKPN-WM i36
GM2018BKSB i34
GM2018BKSB-BL i36
GM2018BKSB-CH i36
GM2018BKSB-DW i36
GM2018BKSB-FD i36
GM2018BKSB-FF i36
GM2018BKSB-FN i36
GM2018BKSB-FZ i36
GM2018BKSB-HB i36
GM2018BKSB-MW i36
GM2018BKSB-OV i36
GM2018BKSB-TD i36
GM2018BKSB-WD i36
GM2018BKSB-WH i36
GM2018BKSB-WM i36
GM2018BKSC i34
GM2018BKSC-BL i36
GM2018BKSC-CH i36
GM2018BKSC-DW i36
GM2018BKSC-FD i36
GM2018BKSC-FF i36
GM2018BKSC-FN i36
GM2018BKSC-FZ i36
GM2018BKSC-HB i36
GM2018BKSC-MW i36
GM2018BKSC-OV i36
GM2018BKSC-TD i36
GM2018BKSC-WD i36
GM2018BKSC-WH i36
GM2018BKSC-WM i36
GM2018BKSS i34
GM2018BKSS-BL i36
GM2018BKSS-CH i36
GM2018BKSS-DW i36
GM2018BKSS-FD i36
GM2018BKSS-FF i36
GM2018BKSS-FN i36
GM2018BKSS-FZ i36
GM2018BKSS-HB i36
GM2018BKSS-MW i36
GM2018BKSS-OV i36
GM2018BKSS-TD i36
GM2018BKSS-WD i36
GM2018BKSS-WH i36
GM2018BKSS-WM i36
GM2018BK-TD i36
GM2018BK-WD i36
GM2018BK-WH i36
GM2018BK-WM i36
GM2018BTBK i68
GM2018BTPW i68
GM2018NBK i38
GM2018NBKAB i38
GM2018NBKAB-BL i40
GM2018NBKAB-CH i40
GM2018NBKAB-DW i40
GM2018NBKAB-FD i40
GM2018NBKAB-FF i40
GM2018NBKAB-FN i40
GM2018NBKAB-FZ i40
GM2018NBKAB-HB i40
GM2018NBKAB-MW i40
GM2018NBKAB-OV i40
GM2018NBKAB-TD i40
GM2018NBKAB-WD i40
GM2018NBKAB-WH i40
GM2018NBKAB-WM i40
GM2018NBK-BL i40
GM2018NBKBN i38
GM2018NBKBN-BL i40
GM2018NBKBN-CH i40
GM2018NBKBN-DW i40
GM2018NBKBN-FD i40
GM2018NBKBN-FF i40
GM2018NBKBN-FN i40
GM2018NBKBN-FZ i40
GM2018NBKBN-HB i40
GM2018NBKBN-MW i40
GM2018NBKBN-OV i40
GM2018NBKBN-TD i40
GM2018NBKBN-WD i40
GM2018NBKBN-WH i40
GM2018NBKBN-WM i40
GM2018NBKBR i38
GM2018NBKBR-BL i40
GM2018NBKBR-CH i40
GM2018NBKBR-DW i40
GM2018NBKBR-FD i40
GM2018NBKBR-FF i40
GM2018NBKBR-FN i40
GM2018NBKBR-FZ i40
GM2018NBKBR-HB i40
GM2018NBKBR-MW i40
GM2018NBKBR-OV i40
GM2018NBKBR-TD i40
GM2018NBKBR-WD i40
GM2018NBKBR-WH i40
GM2018NBKBR-WM i40
GM2018NBKBS i38
GM2018NBKBS-BL i40
GM2018NBKBS-CH i40
GM2018NBKBS-DW i40
GM2018NBKBS-FD i40
GM2018NBKBS-FF i40
GM2018NBKBS-FN i40
GM2018NBKBS-FZ i40
GM2018NBKBS-HB i40
GM2018NBKBS-MW i40
GM2018NBKBS-OV i40
GM2018NBKBS-TD i40
GM2018NBKBS-WD i40
GM2018NBKBS-WH i40
GM2018NBKBS-WM i40
GM2018NBK-CH i40
GM2018NBKCH i38
GM2018NBKCH-BL i40
GM2018NBKCH-CH i40
GM2018NBKCH-DW i40
GM2018NBKCH-FD i40
GM2018NBKCH-FF i40
GM2018NBKCH-FN i40
GM2018NBKCH-FZ i40
GM2018NBKCH-HB i40
GM2018NBKCH-MW i40
GM2018NBKCH-OV i40
GM2018NBKCH-TD i40
GM2018NBKCH-WD i40
GM2018NBKCH-WH i40
GM2018NBKCH-WM i40
GM2018NBK-DW i40
GM2018NBK-FD i40
GM2018NBK-FF i40
GM2018NBK-FN i40
GM2018NBK-FZ i40
GM2018NBK-HB i40
GM2018NBK-MW i40
GM2018NBK-OV i40
GM2018NBKPN i38
GM2018NBKPN-BL i40
GM2018NBKPN-CH i40
GM2018NBKPN-DW i40
GM2018NBKPN-FD i40
GM2018NBKPN-FF i40
GM2018NBKPN-FN i40
GM2018NBKPN-FZ i40
GM2018NBKPN-HB i40
GM2018NBKPN-MW i40
GM2018NBKPN-OV i40
GM2018NBKPN-TD i40
GM2018NBKPN-WD i40
GM2018NBKPN-WH i40
GM2018NBKPN-WM i40
GM2018NBKSB i38
GM2018NBKSB-BL i40
GM2018NBKSB-CH i40
GM2018NBKSB-DW i40
GM2018NBKSB-FD i40
GM2018NBKSB-FF i40
GM2018NBKSB-FN i40
GM2018NBKSB-FZ i40
GM2018NBKSB-HB i40

GM2018NBKSB-MW i40
GM2018NBKSB-OV i40
GM2018NBKSB-TD i40
GM2018NBKSB-WD i40
GM2018NBKSB-WH i40
GM2018NBKSB-WM i40
GM2018NBKSC i38
GM2018NBKSC-BL i40
GM2018NBKSC-CH i40
GM2018NBKSC-DW i40
GM2018NBKSC-FD i40
GM2018NBKSC-FF i40
GM2018NBKSC-FN i40
GM2018NBKSC-FZ i40
GM2018NBKSC-HB i40
GM2018NBKSC-MW i40
GM2018NBKSC-OV i40
GM2018NBKSC-TD i40
GM2018NBKSC-WD i40
GM2018NBKSC-WH i40
GM2018NBKSC-WM i40
GM2018NBKSS i38
GM2018NBKSS-BL i40
GM2018NBKSS-CH i40
GM2018NBKSS-DW i40
GM2018NBKSS-FD i40
GM2018NBKSS-FF i40
GM2018NBKSS-FN i40
GM2018NBKSS-FZ i40
GM2018NBKSS-HB i40
GM2018NBKSS-MW i40
GM2018NBKSS-OV i40
GM2018NBKSS-TD i40
GM2018NBKSS-WD i40
GM2018NBKSS-WH i40
GM2018NBKSS-WM i40
GM2018NBK-TD i40
GM2018NBK-WD i40
GM2018NBK-WH i40
GM2018NBK-WM i40
GM2018NPW i38
GM2018NPW-BL i40
GM2018NPWBR i38
GM2018NPWBR-BL i40
GM2018NPWBR-CH i40
GM2018NPWBR-DW i40
GM2018NPWBR-FD i40
GM2018NPWBR-FF i40
GM2018NPWBR-FN i40
GM2018NPWBR-FZ i40
GM2018NPWBR-HB i40
GM2018NPWBR-MW i40
GM2018NPWBR-OV i40
GM2018NPWBR-TD i40
GM2018NPWBR-WD i40
GM2018NPWBR-WH i40
GM2018NPWBR-WM i40
GM2018NPWBS i38
GM2018NPWBS-BL i40
GM2018NPWBS-CH i40
GM2018NPWBS-DW i40
GM2018NPWBS-FD i40
GM2018NPWBS-FF i40
GM2018NPWBS-FN i40
GM2018NPWBS-FZ i40
GM2018NPWBS-HB i40
GM2018NPWBS-MW i40
GM2018NPWBS-OV i40
GM2018NPWBS-TD i40
GM2018NPWBS-WD i40
GM2018NPWBS-WH i40
GM2018NPWBS-WM i40
GM2018NPW-CH i40
GM2018NPWCH i38
GM2018NPWCH-BL i40
GM2018NPWCH-CH i40
GM2018NPWCH-DW i40
GM2018NPWCH-FD i40
GM2018NPWCH-FF i40
GM2018NPWCH-FN i40
GM2018NPWCH-FZ i40
GM2018NPWCH-HB i40
GM2018NPWCH-MW i40
GM2018NPWCH-OV i40
GM2018NPWCH-TD i40
GM2018NPWCH-WD i40
GM2018NPWCH-WH i40
GM2018NPWCH-WM i40
GM2018NPW-DW i40
GM2018NPW-FD i40
GM2018NPW-FF i40
GM2018NPW-FN i40
GM2018NPW-FZ i40
GM2018NPW-HB i40
GM2018NPW-MW i40
GM2018NPW-OV i40
GM2018NPWPN i38
GM2018NPWPN-BL i40
GM2018NPWPN-CH i40
GM2018NPWPN-DW i40
GM2018NPWPN-FD i40
GM2018NPWPN-FF i40
GM2018NPWPN-FN i40
GM2018NPWPN-FZ i40
GM2018NPWPN-HB i40
GM2018NPWPN-MW i40
GM2018NPWPN-OV i40
GM2018NPWPN-TD i40
GM2018NPWPN-WD i40
GM2018NPWPN-WH i40
GM2018NPWPN-WM i40
GM2018NPWSB i38
GM2018NPWSB-BL i40
GM2018NPWSB-CH i40
GM2018NPWSB-DW i40
GM2018NPWSB-FD i40
GM2018NPWSB-FF i40
GM2018NPWSB-FN i40
GM2018NPWSB-FZ i40
GM2018NPWSB-HB i40
GM2018NPWSB-MW i40
GM2018NPWSB-OV i40
GM2018NPWSB-TD i40
GM2018NPWSB-WD i40
GM2018NPWSB-WH i40
GM2018NPWSB-WM i40
GM2018NPWSC i38
GM2018NPWSC-BL i40
GM2018NPWSC-CH i40
GM2018NPWSC-DW i40
GM2018NPWSC-FD i40
GM2018NPWSC-FF i40
GM2018NPWSC-FN i40
GM2018NPWSC-FZ i40
GM2018NPWSC-HB i40
GM2018NPWSC-MW i40
GM2018NPWSC-OV i40
GM2018NPWSC-TD i40
GM2018NPWSC-WD i40
GM2018NPWSC-WH i40
GM2018NPWSC-WM i40
GM2018NPWSS i38
GM2018NPWSS-BL i40
GM2018NPWSS-CH i40
GM2018NPWSS-DW i40
GM2018NPWSS-FD i40
GM2018NPWSS-FF i40
GM2018NPWSS-FN i40
GM2018NPWSS-FZ i40
GM2018NPWSS-HB i40
GM2018NPWSS-MW i40
GM2018NPWSS-OV i40
GM2018NPWSS-TD i40
GM2018NPWSS-WD i40
GM2018NPWSS-WH i40
GM2018NPWSS-WM i40
GM2018NPW-TD i40
GM2018NPW-WD i40
GM2018NPW-WH i40
GM2018NPW-WM i40
GM2018PW i34
GM2018PW-BL i36
GM2018PWBR i34
GM2018PWBR-BL i36
GM2018PWBR-CH i36
GM2018PWBR-DW i36
GM2018PWBR-FD i36
GM2018PWBR-FF i36
GM2018PWBR-FN i36
GM2018PWBR-FZ i36
GM2018PWBR-HB i36
GM2018PWBR-MW i36
GM2018PWBR-OV i36
GM2018PWBR-TD i36
GM2018PWBR-WD i36
GM2018PWBR-WH i36
GM2018PWBR-WM i36

GM2018PWBS i34
GM2018PWBS-BL i36
GM2018PWBS-CH i36
GM2018PWBS-DW i36
GM2018PWBS-FD i36
GM2018PWBS-FF i36
GM2018PWBS-FN i36
GM2018PWBS-FZ i36
GM2018PWBS-HB i36
GM2018PWBS-MW i36
GM2018PWBS-OV i36
GM2018PWBS-TD i36
GM2018PWBS-WD i36
GM2018PWBS-WH i36
GM2018PWBS-WM i36
GM2018PW-CH i36
GM2018PWCH i34
GM2018PWCH-BL i36
GM2018PWCH-CH i36
GM2018PWCH-DW i36
GM2018PWCH-FD i36
GM2018PWCH-FF i36
GM2018PWCH-FN i36
GM2018PWCH-FZ i36
GM2018PWCH-HB i36
GM2018PWCH-MW i36
GM2018PWCH-OV i36
GM2018PWCH-TD i36
GM2018PWCH-WD i36
GM2018PWCH-WH i36
GM2018PWCH-WM i36
GM2018PW-DW i36
GM2018PW-FD i36
GM2018PW-FF i36
GM2018PW-FN i36
GM2018PW-FZ i36
GM2018PW-HB i36
GM2018PW-MW i36
GM2018PW-OV i36
GM2018PWPN i34
GM2018PWPN-BL i36
GM2018PWPN-CH i36
GM2018PWPN-DW i36
GM2018PWPN-FD i36
GM2018PWPN-FF i36
GM2018PWPN-FN i36
GM2018PWPN-FZ i36
GM2018PWPN-HB i36
GM2018PWPN-MW i36
GM2018PWPN-OV i36
GM2018PWPN-TD i36
GM2018PWPN-WD i36
GM2018PWPN-WH i36
GM2018PWPN-WM i36
GM2018PWSB i34
GM2018PWSB-BL i36
GM2018PWSB-CH i36
GM2018PWSB-DW i36
GM2018PWSB-FD i36
GM2018PWSB-FF i36
GM2018PWSB-FN i36
GM2018PWSB-FZ i36
GM2018PWSB-HB i36
GM2018PWSB-MW i36
GM2018PWSB-OV i36
GM2018PWSB-TD i36
GM2018PWSB-WD i36
GM2018PWSB-WH i36
GM2018PWSB-WM i36
GM2018PWSC i34
GM2018PWSC-BL i36
GM2018PWSC-CH i36
GM2018PWSC-DW i36
GM2018PWSC-FD i36
GM2018PWSC-FF i36
GM2018PWSC-FN i36
GM2018PWSC-FZ i36
GM2018PWSC-HB i36
GM2018PWSC-MW i36
GM2018PWSC-OV i36
GM2018PWSC-TD i36
GM2018PWSC-WD i36
GM2018PWSC-WH i36
GM2018PWSC-WM i36
GM2018PWSS i34
GM2018PWSS-BL i36
GM2018PWSS-CH i36
GM2018PWSS-DW i36
GM2018PWSS-FD i36
GM2018PWSS-FF i36
GM2018PWSS-FN i36
GM2018PWSS-FZ i36
GM2018PWSS-HB i36
GM2018PWSS-MW i36
GM2018PWSS-OV i36
GM2018PWSS-TD i36
GM2018PWSS-WD i36
GM2018PWSS-WH i36
GM2018PWSS-WM i36
GM2018PW-TD i36
GM2018PW-WD i36
GM2018PW-WH i36
GM2018PW-WM i36
GM2028BK i32
GM2028BKAB i32
GM2028BKBN i32
GM2028BKBR i32
GM2028BKBS i32
GM2028BKCH i32
GM2028BKPN i32
GM2028BKSB i32
GM2028BKSC i32
GM2028BKSS i32
GM2028PW i32
GM2028PWBR i32
GM2028PWBS i32
GM2028PWCH i32
GM2028PWPN i32
GM2028PWSB i32
GM2028PWSC i32
GM2028PWSS i32
GM2029BK i50
GM2029BKAB i50
GM2029BKBN i50
GM2029BKBR i50
GM2029BKBS i50
GM2029BKCH i50
GM2029BKPN i50
GM2029BKSB i50
GM2029BKSC i50
GM2029BKSS i50
GM2029PW i50
GM2029PWBR i50
GM2029PWBS i50
GM2029PWCH i50
GM2029PWPN i50
GM2029PWSB i50
GM2029PWSC i50
GM2029PWSS i50
GM2046BK i52
GM2046BKAB i52
GM2046BKABET i54
GM2046BKBN i52
GM2046BKBNET i54
GM2046BKBR i52
GM2046BKBRET i54
GM2046BKBS i52
GM2046BKBSET i54
GM2046BKCH i52
GM2046BKCHET i54
GM2046BKET i54
GM2046BKPN i52
GM2046BKPNET i54
GM2046BKSB i52
GM2046BKSBET i54
GM2046BKSC i52
GM2046BKSCET i54
GM2046BKSS i52
GM2046BKSSET i54
GM2046PW i52
GM2046PWBR i52
GM2046PWBRET i54
GM2046PWBS i52
GM2046PWBSET i54
GM2046PWCH i52
GM2046PWCHET i54
GM2046PWET i54
GM2046PWPN i52
GM2046PWPNET i54
GM2046PWSB i52
GM2046PWSBET i54
GM2046PWSC i52
GM2046PWSCET i54
GM2046PWSS i52
GM2046PWSSET i54
GM2047BK i56
GM2047BKAB i56

GM2047BKBN i56
GM2047BKBR i56
GM2047BKBS i56
GM2047BKCH i56
GM2047BKPN i56
GM2047BKSB i56
GM2047BKSC i56
GM2047BKSS i56
GM2047-LBK i58
GM2047-LBKAB i58
GM2047-LBKBN i58
GM2047-LBKBR i58
GM2047-LBKBS i58
GM2047-LBKCH i58
GM2047-LBKPN i58
GM2047-LBKSB i58
GM2047-LBKSC i58
GM2047-LBKSS i58
GM2047-LPW i58
GM2047-LPWBR i58
GM2047-LPWBS i58
GM2047-LPWCH i58
GM2047-LPWPN i58
GM2047-LPWSB i58
GM2047-LPWSC i58
GM2047-LPWSS i58
GM2047PW i56
GM2047PWBR i56
GM2047PWBS i56
GM2047PWCH i56
GM2047PWPN i56
GM2047PWSB i56
GM2047PWSC i56
GM2047PWSS i56
GM2070BK i42
GM2070BKAB i42
GM2070BKBN i42
GM2070BKBR i42
GM2070BKBS i42
GM2070BKCH i42
GM2070BKPN i42
GM2070BKSB i42
GM2070BKSC i42
GM2070BKSS i42
GM2070PW i42
GM2070PWBR i42
GM2070PWBS i42
GM2070PWCH i42
GM2070PWPN i42
GM2070PWSB i42
GM2070PWSC i42
GM2070PWSS i42
GM2075BK i44
GM2075BKAB i44
GM2075BKBN i44
GM2075BKBR i44
GM2075BKBS i44
GM2075BKCH i44
GM2075BKPN i44
GM2075BKSB i44
GM2075BKSC i44
GM2075BKSS i44
GM2075PW i44
GM2075PWBR i44
GM2075PWBS i44
GM2075PWCH i44
GM2075PWPN i44
GM2075PWSB i44
GM2075PWSC i44
GM2075PWSS i44
GM2080BK i64
GM2080PW i64
GM2081BK i64
GM2081PW i64
GM2082BK i64
GM2082PW i64
GM2300BK i70
GM2300PW i70
GM2305BK i76
GM2305PW i76
GM2405BK i76
GM2405PW i76
GM2410BK i76
GM2410PW i76
GM2415BK i76
GM2415PW i76
GM2460BK i74
GM2460PW i74
GM2465BK i74
GM2465PW i74
GM2470BK i74
GM2470PW i74
GM2485BK i74
GM2485PW i74
GM2490BK i72
GM2490PW i72
GM2495BK i72
GM2495PW i72
GM2496BK i72
GM2496PW i72
GM2497BK i72
GM2497PW i72
GM2501BK i76
GM2501PW i76
GM2600BK i70
GM2600PW i70
GM2650BK i70
GM2650PW i70
GM9001 i82
GM9010 i82
GM9022 i82
GM9042 i82
GR100BK b19, c9, h10, j7
GR100PW b19, c9, h10, j7
GR20400 i137
GR20600 i137

J

JA-82M a19
JA-83M a19

M

MCP085 b34
MCP086 b34
MD001BK j18
MD001PW j18
MD001WH j18
MD002AB j18
MD002BK j18
MD002BN j18
MD002BR j18
MD002BS j18
MD002CH j18
MD002PN j18
MD002PW j18
MD002RD j18
MD002SB j18
MD002SC j18
MD002SS j18
MD002WH j18
MD003AB j23
MD003BK j23
MD003BN j23
MD003BR j23
MD003BS j23
MD003CH j23
MD003PN j23
MD003PW j23
MD003SB j23
MD003SC j23
MD003SS j23
MD003WH j23
MD004AB j21
MD004BK j21
MD004BN j21
MD004BR j21
MD004BS j21
MD004CH j21
MD004PN j21
MD004PW j21
MD004SB j21
MD004SC j21
MD004SS j21
MD004WH j21
MD005AB j29
MD005BK j29
MD005BN j29
MD005BR j29
MD005BS j29
MD005CH j29
MD005PN j29
MD005PW j29
MD005SB j29
MD005SC j29
MD005SS j29
MD005WH j29
MD008AB j26
MD008BK j26
MD008BN j26
MD008BR j26
MD008BS j26
MD008CH j26
MD008PN j26
MD008PW j26
MD008SB j26
MD008SC j26
MD008SS j26
MD008WH j26
MD009AB j20
MD009BK j20
MD009BN j20
MD009BR j20
MD009BS j20
MD009CH j20
MD009PN j20
MD009PW j20
MD009SB j20
MD009SC j20
MD009SS j20
MD009WH j20
MD017BK j28
MD017BKAB j28
MD017BKBN j28
MD017BKBR j28
MD017BKBS j28
MD017BKCH j28
MD017BKPN j28
MD017BKSB j28
MD017BKSC j28
MD017BKSS j28
MD017PW j28
MD017WH j28
MD017WHBR j28
MD017WHBS j28
MD017WHCH j28
MD017WHPN j28
MD017WHSB j28
MD017WHSC j28
MD017WHSS j28
MD018AB j22
MD018AB-BL j22
MD018AB-CH j22
MD018AB-DW j22
MD018AB-FD j22
MD018AB-FF j22
MD018AB-FN j22
MD018AB-FZ j22
MD018AB-HB j22
MD018AB-MW j22
MD018AB-OV j22

MD018AB-TD	j22	MD018BS-OV	j22	MD018SB-HB	j22	MD020PW	j32
MD018AB-WD	j22	MD018BS-TD	j22	MD018SB-MW	j22	MD020SB	j32
MD018AB-WH	j22	MD018BS-WD	j22	MD018SB-OV	j22	MD020SC	j32
MD018AB-WM	j22	MD018BS-WH	j22	MD018SB-TD	j22	MD020SS	j32
MD018BK	j22	MD018BS-WM	j22	MD018SB-WD	j22	MD020WH	j32
MD018BK-BL	j22	MD018CH	j22	MD018SB-WH	j22	MD022AB	j34
MD018BK-CH	j22	MD018CH-BL	j22	MD018SB-WM	j22	MD022AB-BL	j34
MD018BK-DW	j22	MD018CH-CH	j22	MD018SC	j22	MD022AB-CH	j34
MD018BK-FD	j22	MD018CH-DW	j22	MD018SC-BL	j22	MD022AB-DW	j34
MD018BK-FF	j22	MD018CH-FD	j22	MD018SC-CH	j22	MD022AB-FD	j34
MD018BK-FN	j22	MD018CH-FF	j22	MD018SC-DW	j22	MD022AB-FF	j34
MD018BK-FZ	j22	MD018CH-FN	j22	MD018SC-FD	j22	MD022AB-FN	j34
MD018BK-HB	j22	MD018CH-FZ	j22	MD018SC-FF	j22	MD022AB-FZ	j34
MD018BK-MW	j22	MD018CH-HB	j22	MD018SC-FN	j22	MD022AB-HB	j34
MD018BK-OV	j22	MD018CH-MW	j22	MD018SC-FZ	j22	MD022AB-MW	j34
MD018BK-TD	j22	MD018CH-OV	j22	MD018SC-HB	j22	MD022AB-OV	j34
MD018BK-WD	j22	MD018CH-TD	j22	MD018SC-MW	j22	MD022AB-TD	j34
MD018BK-WH	j22	MD018CH-WD	j22	MD018SC-OV	j22	MD022AB-WD	j34
MD018BK-WM	j22	MD018CH-WH	j22	MD018SC-TD	j22	MD022AB-WH	j34
MD018BN	j22	MD018CH-WM	j22	MD018SC-WD	j22	MD022AB-WM	j34
MD018BN-BL	j22	MD018PN	j22	MD018SC-WH	j22	MD022BK	j34
MD018BN-CH	j22	MD018PN-BL	j22	MD018SC-WM	j22	MD022BK-BL	j34
MD018BN-DW	j22	MD018PN-CH	j22	MD018SS	j22	MD022BK-CH	j34
MD018BN-FD	j22	MD018PN-DW	j22	MD018SS-BL	j22	MD022BK-DW	j34
MD018BN-FF	j22	MD018PN-FD	j22	MD018SS-CH	j22	MD022BK-FD	j34
MD018BN-FN	j22	MD018PN-FF	j22	MD018SS-DW	j22	MD022BK-FF	j34
MD018BN-FZ	j22	MD018PN-FN	j22	MD018SS-FD	j22	MD022BK-FN	j34
MD018BN-HB	j22	MD018PN-FZ	j22	MD018SS-FF	j22	MD022BK-FZ	j34
MD018BN-MW	j22	MD018PN-HB	j22	MD018SS-FN	j22	MD022BK-HB	j34
MD018BN-OV	j22	MD018PN-MW	j22	MD018SS-FZ	j22	MD022BK-MW	j34
MD018BN-TD	j22	MD018PN-OV	j22	MD018SS-HB	j22	MD022BK-OV	j34
MD018BN-WD	j22	MD018PN-TD	j22	MD018SS-MW	j22	MD022BK-TD	j34
MD018BN-WH	j22	MD018PN-WD	j22	MD018SS-OV	j22	MD022BK-WD	j34
MD018BN-WM	j22	MD018PN-WH	j22	MD018SS-TD	j22	MD022BK-WH	j34
MD018BR	j22	MD018PN-WM	j22	MD018SS-WD	j22	MD022BK-WM	j34
MD018BR-BL	j22	MD018PW	j22	MD018SS-WH	j22	MD022BN	j34
MD018BR-CH	j22	MD018PW-BL	j22	MD018SS-WM	j22	MD022BN-BL	j34
MD018BR-DW	j22	MD018PW-CH	j22	MD018WH	j22	MD022BN-CH	j34
MD018BR-FD	j22	MD018PW-DW	j22	MD018WH-BL	j22	MD022BN-DW	j34
MD018BR-FF	j22	MD018PW-FD	j22	MD018WH-CH	j22	MD022BN-FD	j34
MD018BR-FN	j22	MD018PW-FF	j22	MD018WH-DW	j22	MD022BN-FF	j34
MD018BR-FZ	j22	MD018PW-FN	j22	MD018WH-FD	j22	MD022BN-FN	j34
MD018BR-HB	j22	MD018PW-FZ	j22	MD018WH-FF	j22	MD022BN-FZ	j34
MD018BR-MW	j22	MD018PW-HB	j22	MD018WH-FN	j22	MD022BN-HB	j34
MD018BR-OV	j22	MD018PW-MW	j22	MD018WH-FZ	j22	MD022BN-MW	j34
MD018BR-TD	j22	MD018PW-OV	j22	MD018WH-HB	j22	MD022BN-OV	j34
MD018BR-WD	j22	MD018PW-TD	j22	MD018WH-MW	j22	MD022BN-TD	j34
MD018BR-WH	j22	MD018PW-WD	j22	MD018WH-OV	j22	MD022BN-WD	j34
MD018BR-WM	j22	MD018PW-WH	j22	MD018WH-TD	j22	MD022BN-WH	j34
MD018BS	j22	MD018PW-WM	j22	MD018WH-WD	j22	MD022BN-WM	j34
MD018BS-BL	j22	MD018RD	j22	MD018WH-WH	j22	MD022BR	j34
MD018BS-CH	j22	MD018SB	j22	MD018WH-WM	j22	MD022BR-BL	j34
MD018BS-DW	j22	MD018SB-BL	j22	MD020AB	j32	MD022BR-CH	j34
MD018BS-FD	j22	MD018SB-CH	j22	MD020BK	j32	MD022BR-DW	j34
MD018BS-FF	j22	MD018SB-DW	j22	MD020BN	j32	MD022BR-FD	j34
MD018BS-FN	j22	MD018SB-FD	j22	MD020BR	j32	MD022BR-FF	j34
MD018BS-FZ	j22	MD018SB-FF	j22	MD020BS	j32	MD022BR-FN	j34
MD018BS-HB	j22	MD018SB-FN	j22	MD020CH	j32	MD022BR-FZ	j34
MD018BS-MW	j22	MD018SB-FZ	j22	MD020PN	j32	MD022BR-HB	j34

MD022BR-MW j34
MD022BR-OV j34
MD022BR-TD j34
MD022BR-WD j34
MD022BR-WH j34
MD022BR-WM j34
MD022BS j34
MD022BS-BL j34
MD022BS-CH j34
MD022BS-DW j34
MD022BS-FD j34
MD022BS-FF j34
MD022BS-FN j34
MD022BS-FZ j34
MD022BS-HB j34
MD022BS-MW j34
MD022BS-OV j34
MD022BS-TD j34
MD022BS-WD j34
MD022BS-WH j34
MD022BS-WM j34
MD022CH j34
MD022CH-BL j34
MD022CH-CH j34
MD022CH-DW j34
MD022CH-FD j34
MD022CH-FF j34
MD022CH-FN j34
MD022CH-FZ j34
MD022CH-HB j34
MD022CH-MW j34
MD022CH-OV j34
MD022CH-TD j34
MD022CH-WD j34
MD022CH-WH j34
MD022CH-WM j34
MD022PN j34
MD022PN-CH j34
MD022PN-DW j34
MD022PN-FD j34
MD022PN-FF j34
MD022PN-FN j34
MD022PN-FZ j34
MD022PN-HB j34
MD022PN-MW j34
MD022PN-OV j34
MD022PN-TD j34
MD022PN-WD j34
MD022PN-WH j34
MD022PN-WM j34
MD022PW j34
MD022PW-BL j34
MD022PW-CH j34
MD022PW-DW j34
MD022PW-FD j34
MD022PW-FF j34
MD022PW-FN j34
MD022PW-FZ j34
MD022PW-HB j34
MD022PW-MW j34
MD022PW-OV j34
MD022PW-TD j34
MD022PW-WD j34
MD022PW-WH j34
MD022PW-WM j34
MD022SB j34
MD022SB-BL j34
MD022SB-CH j34
MD022SB-DW j34
MD022SB-FD j34
MD022SB-FF j34
MD022SB-FN j34
MD022SB-FZ j34
MD022SB-HB j34
MD022SB-MW j34
MD022SB-OV j34
MD022SB-TD j34
MD022SB-WD j34
MD022SB-WH j34
MD022SB-WM j34
MD022SC j34
MD022SC-BL j34
MD022SC-CH j34
MD022SC-DW j34
MD022SC-FD j34
MD022SC-FF j34
MD022SC-FN j34
MD022SC-FZ j34
MD022SC-HB j34
MD022SC-MW j34
MD022SC-OV j34
MD022SC-TD j34
MD022SC-WD j34
MD022SC-WH j34
MD022SC-WM j34
MD022SS j34
MD022SS-BL j34
MD022SS-CH j34
MD022SS-DW j34
MD022SS-FD j34
MD022SS-FF j34
MD022SS-FN j34
MD022SS-FZ j34
MD022SS-HB j34
MD022SS-MW j34
MD022SS-OV j34
MD022SS-TD j34
MD022SS-WD j34
MD022SS-WH j34
MD022SS-WM j34
MD022WH j34
MD022WH-BL j34
MD022WH-CH j34
MD022WH-DW j34
MD022WH-FD j34
MD022WH-FF j34
MD022WH-FN j34
MD022WH-FZ j34
MD022WH-HB j34
MD022WH-MW j34
MD022WH-OV j34
MD022WH-TD j34
MD022WH-WD j34
MD022WH-WH j34
MD022WH-WM j34
MD023AB j35
MD023AB-BL j35
MD023AB-CH j35
MD023AB-DW j35
MD023AB-FD j35
MD023AB-FF j35
MD023AB-FN j35
MD023AB-FZ j35
MD023AB-HB j35
MD023AB-MW j35
MD023AB-OV j35
MD023AB-TD j35
MD023AB-WD j35
MD023AB-WH j35
MD023AB-WM j35
MD023BK j35
MD023BK-BL j35
MD023BK-CH j35
MD023BK-DW j35
MD023BK-FD j35
MD023BK-FF j35
MD023BK-FN j35
MD023BK-FZ j35
MD023BK-HB j35
MD023BK-MW j35
MD023BK-OV j35
MD023BK-TD j35
MD023BK-WD j35
MD023BK-WH j35
MD023BK-WM j35
MD023BN j35
MD023BN-BL j35
MD023BN-CH j35
MD023BN-DW j35
MD023BN-FD j35
MD023BN-FF j35
MD023BN-FN j35
MD023BN-FZ j35
MD023BN-HB j35
MD023BN-MW j35
MD023BN-OV j35
MD023BN-TD j35
MD023BN-WD j35
MD023BN-WH j35
MD023BN-WM j35
MD023BR j35
MD023BR-BL j35
MD023BR-CH j35
MD023BR-DW j35
MD023BR-FD j35
MD023BR-FF j35
MD023BR-FN j35
MD023BR-FZ j35
MD023BR-HB j35
MD023BR-MW j35
MD023BR-OV j35
MD023BR-TD j35
MD023BR-WD j35
MD023BR-WH j35
MD023BR-WM j35
MD023BS j35
MD023BS-BL j35
MD023BS-CH j35
MD023BS-DW j35
MD023BS-FD j35
MD023BS-FF j35
MD023BS-FN j35
MD023BS-FZ j35
MD023BS-HB j35
MD023BS-MW j35
MD023BS-OV j35
MD023BS-TD j35
MD023BS-WD j35
MD023BS-WH j35
MD023BS-WM j35
MD023CH j35
MD023CH-BL j35
MD023CH-CH j35
MD023CH-DW j35
MD023CH-FD j35
MD023CH-FF j35
MD023CH-FN j35
MD023CH-FZ j35
MD023CH-HB j35
MD023CH-MW j35
MD023CH-OV j35
MD023CH-TD j35
MD023CH-WD j35
MD023CH-WH j35
MD023CH-WM j35
MD023PN j35
MD023PN-BL j35
MD023PN-CH j35
MD023PN-DW j35
MD023PN-FD j35
MD023PN-FF j35
MD023PN-FN j35
MD023PN-FZ j35
MD023PN-HB j35
MD023PN-MW j35
MD023PN-OV j35
MD023PN-TD j35
MD023PN-WD j35
MD023PN-WH j35
MD023PN-WM j35
MD023PW j35
MD023PW-BL j35
MD023PW-CH j35
MD023PW-DW j35
MD023PW-FD j35
MD023PW-FF j35

MD023PW-FN	j35	MD023WH-FF	j35	MD046PN	j25	MD150SB	j36
MD023PW-FZ	j35	MD023WH-FN	j35	MD046PW	j25	MD150SC	j36
MD023PW-HB	j35	MD023WH-FZ	j35	MD046RD	j25	MD150SS	j36
MD023PW-MW	j35	MD023WH-HB	j35	MD046SB	j25	MD150WH	j36
MD023PW-OV	j35	MD023WH-MW	j35	MD046SC	j25	MD220BK	j32
MD023PW-TD	j35	MD023WH-OV	j35	MD046SS	j25	MD220PW	j32
MD023PW-WD	j35	MD023WH-TD	j35	MD046WH	j25	MD220WH	j32
MD023PW-WH	j35	MD023WH-WD	j35	MD047BK	j27	MD280	j26, j29
MD023PW-WM	j35	MD023WH-WH	j35	MD047BKAB	j27	MD281	j26, j29
MD023SB	j35	MD023WH-WM	j35	MD047BKBN	j27	MD282	j26, j29
MD023SB-BL	j35	MD024BK	j33	MD047BKBR	j27	MD9001	b15, c11, d8, e9, f10, g10, j37, l6
MD023SB-CH	j35	MD024BN	j33	MD047BKBS	j27		
MD023SB-DW	j35	MD024BS	j33	MD047BKCH	j27		
MD023SB-FD	j35	MD024CH	j33	MD047BKPN	j27	MD9010	b15, c11, d8, e9, f10, g10, j37, l6
MD023SB-FF	j35	MD024PW	j33	MD047BKSB	j27		
MD023SB-FN	j35	MD024SC	j33	MD047BKSC	j27	MD9014	b15, c11, d8, e9, f10, g10, i82, j37, l6
MD023SB-FZ	j35	MD024SS	j33	MD047BKSS	j27		
MD023SB-HB	j35	MD024WH	j33	MD047PW	j27	MD9022	b15, c11, d8, e9, f10, g10, j37, l6
MD023SB-MW	j35	MD028AB	j19	MD047RD	j27		
MD023SB-OV	j35	MD028BK	j19	MD047WH	j27	MD9042	b15, c11, d8, e9, f10, g10, j37, l6
MD023SB-TD	j35	MD028BN	j19	MD047WHBR	j27		
MD023SB-WD	j35	MD028BR	j19	MD047WHBS	j27	MD9102AB	j38
MD023SB-WH	j35	MD028BS	j19	MD047WHCH	j27	MD9102BN	j38
MD023SB-WM	j35	MD028CH	j19	MD047WHPN	j27	MD9102BR	j38
MD023SC	j35	MD028PN	j19	MD047WHSB	j27	MD9102CH	j38
MD023SC-BL	j35	MD028PW	j19	MD047WHSC	j27	MD9102PN	j38
MD023SC-CH	j35	MD028SB	j19	MD047WHSS	j27	MD9125AB	b13, c12, j38
MD023SC-DW	j35	MD028SC	j19	MD070AB	j30		
MD023SC-FD	j35	MD028SS	j19	MD070BK	j30	MD9125BN	b13, c12, d9, j38
MD023SC-FF	j35	MD028WH	j19	MD070BN	j30		
MD023SC-FN	j35	MD029AB	j24	MD070BR	j30	MD9125BR	b13, c12, j38
MD023SC-FZ	j35	MD029BK	j24	MD070BS	j30		
MD023SC-HB	j35	MD029BN	j24	MD070CH	j30	MD9125CH	b13, c12, d9, e10, j38
MD023SC-MW	j35	MD029BR	j24	MD070PN	j30		
MD023SC-OV	j35	MD029BS	j24	MD070PW	j30	MD9125PN	b13, c12, d9, e10, j38
MD023SC-TD	j35	MD029CH	j24	MD070SB	j30		
MD023SC-WD	j35	MD029PN	j24	MD070SC	j30	MI003	j23, j24, j25
MD023SC-WH	j35	MD029PW	j24	MD070SS	j30		
MD023SC-WM	j35	MD029SB	j24	MD070WH	j30	MM002BK	k19
MD023SS	j35	MD029SC	j24	MD075AB	j31	MM002WH	k19
MD023SS-BL	j35	MD029SS	j24	MD075BK	j31	MM010BK	k20
MD023SS-CH	j35	MD029WH	j24	MD075BN	j31	MM010WH	k20
MD023SS-DW	j35	MD032BK	j33	MD075BR	j31	MM020BK	k20
MD023SS-FD	j35	MD032BN	j33	MD075BS	j31	MM020WH	k20
MD023SS-FF	j35	MD032BS	j33	MD075CH	j31	MM022BK	k19
MD023SS-FN	j35	MD032CH	j33	MD075PN	j31	MM022WH	k19
MD023SS-FZ	j35	MD032PW	j33	MD075PW	j31	MM023BK	k19
MD023SS-HB	j35	MD032SC	j33	MD075SB	j31	MM023WH	k19
MD023SS-MW	j35	MD032SS	j33	MD075SC	j31	MM025BK	k19
MD023SS-OV	j35	MD032WH	j33	MD075SS	j31	MM025WH	k19
MD023SS-TD	j35	MD038BK	j20	MD075WH	j31	MM030BK	k20
MD023SS-WD	j35	MD038PW	j20	MD150AB	j36	MM030WH	k20
MD023SS-WH	j35	MD038WH	j20	MD150BK	j36	MM033BK	k20
MD023SS-WM	j35	MD046AB	j25	MD150BN	j36	MM033WH	k20
MD023WH	j35	MD046BK	j25	MD150BR	j36	MM038BK	k20
MD023WH-BL	j35	MD046BN	j25	MD150BS	j36	MM038WH	k20
MD023WH-CH	j35	MD046BR	j25	MD150CH	j36	MM047BK	k19
MD023WH-DW	j35	MD046BS	j25	MD150PN	j36	MM047WH	k19
MD023WH-FD	j35	MD046CH	j25	MD150PW	j36	MM300BK	k22

MM300WH k22
MM305BK k22
MM305WH k22
MM405BK k16
MM405WH k16
MM406BK k16
MM406WH k16
MM410BK k16
MM410WH k16
MM415BK k16
MM415WH k16
MM420BK k17
MM420WH k17
MM425BK k17
MM425WH k17
MM430BK k17
MM430WH k17
MM440BK k17
MM440WH k17
MM450BK k16
MM450WH k16
MM460BK k18
MM460WH k18
MM465BK k18
MM465WH k18
MM470BK k18
MM470WH k18
MM480BK k18
MM480WH k18
MM485BK k18
MM485WH k18
MM490BK k21
MM490WH k21
MM491BK k22
MM491WH k22
MM495BK k21
MM495WH k21
MM496BK k22
MM496WH k22
MM501BK k21
MM501WH k21
MM515 k20
MM550BK k21
MM550WH k21
MM550WHWH k21
MM620BK k23
MM1000BL k21
MM1000CW k21
MM1000WW k21
MP508AB k5
MP508BR k5
MP508PN k5
MP508SB k5
MP510 k8
MP516AB k6
MP516BN k6
MP516BR k6
MP516BS k6
MP516CH k6
MP516PN k6
MP516SS k6
MP520 k8
MP521 k8
MP525 k8
MP526 k8
MP535 k8
MP536 k8
MP606CHBK c28, k7
MP606CHWH c28, k7
MP606PW c28, k7
MP606SCBK c28, k7
MP606SCWH c28, k7
MP608AB k5
MP608BN k5
MP608BR k5
MP608BS k5
MP608CH k5
MP608PN k5
MP608PW k5
MP608SB k5
MP608SC k5
MP608SS k5
MP616AB k6
MP616BN k6
MP616BR k6
MP616BS k6
MP616CH k6
MP616PN k6
MP616PW k6
MP616SB k6
MP616SC k6
MP616SS k6

O

OA035AG m14
OA036AG m14
OA401AG m13
OA402AG m13
OA411AG m13
OA412AG m13
OA501AG m14
OA502AG m14
OA1636AG a41

P

PA040 m31
PA041A m31
PA042A m31
PA165 m36
PA166 m36
PA167 m36
PA175 m36
PA176 m36
PA177 m36
PA301 m36
PA302 m36
PA303 m36
PA310 m36
PA311 m36
PA312 m36
PA320 m36
PA321 m36
PA322 m36
PA330 m36
PA331 m36
PA332 m36
PA340TR m36
PA380RD f14, m36
PA380WH f14, m36
PA130100BK m40
PC938W m40
PC939W m40
PC940W m40
PC942W m40
PC951W m40
PC979W m40
PC980W m40
PC1002W m40
PC1003W m40
PC1021W m40
PC1022W m40
PC1024W m40
PC1025W m40
PC1174W m41
PC1175W m41
PC1214W m41
PC1284W m41
PC1285W m41
PC1286W m41
PC1293W m41
PC1361W m41
PC1375W m41
PRC001 m30
PRC003 m30
PRC004 m30
PRC005 m30
PRC006 m29
PRC007 m29
PRC008 m29
PRC009 f21, g18, m27
PRC011 m30
PRC012 m30
PRC015 m29
PRC016 m29
PRC017 m29
PRC020 m30
PRC029 m30
PRC031 m29

PRC033 **m29**
PRC038 **m29**
PRC210 **f21, g18, m27**
PRC210AG **h16**
PRC216 **f21, g18, m27**
PRC216AG **h16**
PRC1440 **m28, n10**
PRC1440RD **m28, n10**
PRW010 **g5**
PRW011 **g5**
PRW012 **g5**
PRW013 **g5**
PRW015 **g6**
PRW017 **g20**
PRW019 **g5**
PRW020 **g15**
PRW021 **g15**
PRW022 **g15**
PRW023 **g15**
PRW024 **g15**
PRW025 **g6**
PRW030 **g12**
PRW030EX **g12**
PRW032 **g12**
PRW034 **g13**
PRW035 **g12**
PRW036 **g12**
PRW037 **g12**
PRW038 **g13**
PRW039 **g13**
PRW040 **g15**
PRW042 **g15**
PRW049 **g14**
PRW050 **g14**
PRW051 **g14**
PRW052 **g14**
PRW053 **g14**
PRW060 **g20**
PRW061 **g20**
PRW065 **g23**
PRW066 **g23**
PRW080 **g25**
PRW081 **g25**
PRW082 **g25**
PRW083 **g25**
PRW084 **g25**
PRW085 **g25**
PRW086 **g25**
PRW089 **g25**
PRW090 **g20**
PRW091 **g25**
PRW100 **g20**
PRW105 **g5**
PRW115 **g22**
PRW119 **g22**
PRW120 **g22**
PRW121 **g22**
PRW122 **g22**
PRW124 **g22**
PRW125 **g22**
PRW126 **g22**
PRW127 **g22**
PRW140 **g10**
PRW145 **g10**
PRW146 **g10**
PRW147 **g10**
PRW148 **g10**
PRW156 **g23**
PRW157 **g23**
PRW158 **g23**
PRW159 **g23**
PRW170 **g23**
PRW171 **g6**
PRW172 **g6**
PRW175 **g25**
PRW176 **g25**
PRW200 **g16**
PRW201 **g16**
PRW202 **g16**
PRW203 **g16**
PRW204 **g16**
PRW205 **g16**
PRW208 **f21, g18, m27**
PRW208AG **h16**
PRW210 **f21, g18, m27**
PRW210AG **h16**
PRW210RD **h16**
PRW211 **f21, g18, m27**
PRW211AG **h16**
PRW211RD **h16**
PRW213 **f21, g18, m27**
PRW213AG **h16**
PRW213RD **h16**
PRW215 **g19, m34**
PRW217 **f22, g19, m34**
PRW218 **f22, g19, m34**
PRW230 **g25**
PRW235 **g25**
PRW240 **g25**
PRW245 **g25**
PRW290 **g14**
PRW291 **g14**
PRW310 **g24, k13**
PRW311 **g24, k13**
PRW312 **g24, k13**
PRW401 **g7, j14**
PRW402 **g7, j14**
PRW403 **g7, j14**
PRW404 **g7, j14**
PRW406 **g7, j14**
PRW426 **g7, j14**
PRW432 **g7, j14**
PRW500 **g17**
PRW501 **g17**
PRW502 **g17**
PRW503 **g17**
PRW504 **g17**
PRW505 **g17**
PRW605 **g12**
PRW606 **g12**
PRW612 **g8, j5**
PRW618 **g8, j6**
PRW630 **g12**
PRW635 **g12**
PRW660 **g15**
PRW675 **g15**
PRW770 **g13**
PRW771U **g13**
PRW780 **g13**
PRW811 **g5**
PRW812 **g5**
PRW813 **g5**
PRW1035 **g12**
PRW1036 **g12**
PRW1037 **g12**
PRW1635 **g12**
PRW20401 **i126**
PRW20402 **i126**
PRW20403 **i126**
PRW20404 **i126**
PRW20506 **i127**
PRW20508 **i127**
PRW20509 **i128**
PRW20512 **i128**
PRW20518 **i129**
PRW20524 **i130**
PRW31102 **i126**
PRW-SMART1 **a34**
PRW-SMART2 **a34**
PRW-SMART3 **a34**
PRW-SMART4 **a34**
PRW-SMART6 **a34**

R

RFDA-71B **a24**
RFDAC-71B **a24**
RFDEL-71B **a24**
RFDEL-71F **a24, n10**
RFIM-40B **a18**
RFJA-12B/24V **a23**
RFJA-12B/230V **a23**
RF KEY/B **a17**
RF KEY/W **a17**
RFMD-100 **a19**
RF PILOT **a18**
RFRP-20/B **a19**

RFSA-61F a24, n10
RFSA-61M a23
RFSA-62B a23
RFSA-66M a23
RFSAI-61B a23
RFSC-61 a23
RFSG-1M a18
RFTP001 a17
RFT-WBK a21
RFT-WWH a21
RFWB-20/G a17
RFWB-40/G a17

S

SB1G m10
SB2G m10
SB6IN1 m10
SCP060BK e23, e48
SCP060BS e23, e48
SCP060CH e23, e48
SCP060PW e23, e48
SCP060SS e23, e48
SCP061BK e23, e48
SCP061BS e23, e48
SCP061CH e23, e48
SCP061PW e23, e48
SCP061SS e23, e48
SCP100BK e23, e38
SCP100BS e23, e38
SCP100CH e23, e38
SCP100PW e23, e38
SCP100SS e23, e38
SCP115BK e26, e48
SCP115BS e26, e48
SCP115CH e26, e48
SCP115PW e26, e48
SCP115SS e26, e48
SCP120BK e26, e49
SCP120BS e26, e49
SCP120CH e26, e49
SCP120PW e26, e49
SCP120SS e26, e49
SCP121BK e26, e49
SCP121BS e26, e49
SCP121CH e26, e49
SCP121PW e26, e49
SCP121SS e26, e49
SCP150BK e14, e15, e42
SCP150BS e14, e15, e42
SCP150CH e14, e15, e42
SCP150PW e14, e15, e42
SCP150SS e14, e15, e42
SCP151BK e14, e15, e42
SCP151BS e14, e15, e42
SCP151CH e14, e15, e42
SCP151PW e14, e15, e42
SCP151SS e14, e15, e42
SCP152BK e14, e15, e42
SCP152BS e14, e15, e42
SCP152CH e14, e15, e42
SCP152PW e14, e15, e42
SCP152SS e14, e15, e42
SCP153BK e14, e15, e42
SCP153BS e14, e15, e42
SCP153CH e14, e15, e42
SCP153PW e14, e15, e42
SCP153SS e14, e15, e42
SCP200BK e18, e19, e46
SCP200BS e18, e19, e46
SCP200CH e18, e19, e46
SCP200PW e18, e19, e46
SCP200SS e18, e19, e46
SCP201BK e18, e19, e46
SCP201BS e18, e19, e46
SCP201CH e18, e19, e46
SCP201PW e18, e19, e46
SCP201SS e18, e19, e46
SCP202BK e18, e19, e47
SCP202BS e18, e19, e47
SCP202CH e18, e19, e47
SCP202PW e18, e19, e47
SCP202SS e18, e19, e47
SCP203BK e18, e19, e47
SCP203BS e18, e19, e47
SCP203CH e18, e19, e47
SCP203PW e18, e19, e47
SCP203SS e18, e19, e47
SCP204BK e18, e19, e47
SCP204BS e18, e19, e47
SCP204CH e18, e19, e47
SCP204PW e18, e19, e47
SCP204SS e18, e19, e47
SCP205BK e18, e19, e47
SCP205BS e18, e19, e47
SCP205CH e18, e19, e47
SCP205PW e18, e19, e47
SCP205SS e18, e19, e47
SCP221BK e10, e34
SCP221BS e10, e34
SCP221CH e10, e34
SCP221PW e10, e34
SCP221SS e10, e34
SCP222BK e10, e35
SCP222BS e10, e35
SCP222CH e10, e35
SCP222PW e10, e35
SCP222SS e10, e35
SCP223BK e10, e35
SCP223BS e10, e35
SCP223CH e10, e35
SCP223PW e10, e35
SCP223SS e10, e35
SCP224BK e10, e35
SCP224BS e10, e35
SCP224CH e10, e35
SCP224PW e10, e35
SCP224SS e10, e35
SCP231BK e27, e50
SCP231BS e27, e50
SCP231CH e27, e50
SCP231PW e27, e50
SCP231SS e27, e50
SCP232BK e27, e51
SCP232BS e27, e51
SCP232CH e27, e51
SCP232PW e27, e51
SCP232SS e27, e51
SCP234BK e22, e39
SCP234BS e22, e39
SCP234CH e22, e39
SCP234PW e22, e39
SCP234SS e22, e39
SCP238BK e22, e39
SCP238BS e22, e39
SCP238CH e22, e39
SCP238PW e22, e39
SCP238SS e22, e39
SCP239BK e22, e39
SCP239BS e22, e39
SCP239CH e22, e39
SCP239PW e22, e39
SCP239SS e22, e39
SCP241BK e9, e33
SCP241BKCH e9, e33
SCP241BS e9, e33
SCP241CH e9, e33
SCP241PW e9, e33
SCP241SS e9, e33
SCP242BK e9, e33
SCP242BKCH e9, e33
SCP242BS e9, e33
SCP242CH e9, e33
SCP242PW e9, e33
SCP242SS e9, e33
SCP243BK e9, e33
SCP243BKCH e9, e33
SCP243BS e9, e33
SCP243CH e9, e33
SCP243PW e9, e33
SCP243SS e9, e33
SCP244BK e9, e34
SCP244BKCH e9, e34
SCP244BS e9, e34
SCP244CH e9, e34
SCP244PW e9, e34
SCP244SS e9, e34
SCP250BK e14, e15, e43
SCP250BS e14, e15, e43
SCP250CH e14, e15, e43
SCP250PW e14, e15, e43
SCP250SS e14, e15, e43
SCP251BK e14, e15, e43
SCP251BS e14, e15, e43
SCP251CH e14, e15, e43

SCP251PW	e14, e15, e43
SCP251SS	e14, e15, e43
SCP252BK	e14, e15, e43
SCP252BS	e14, e15, e43
SCP252CH	e14, e15, e43
SCP252PW	e14, e15, e43
SCP252SS	e14, e15, e43
SCP253BK	e14, e15, e43
SCP253BS	e14, e15, e43
SCP253CH	e14, e15, e43
SCP253PW	e14, e15, e43
SCP253SS	e14, e15, e43
SCP310BK	e28, e52, k12
SCP310BS	e28, e52, k12
SCP310CH	e28, e52, k12
SCP310PW	e28, e52, k12
SCP310SS	e28, e52, k12
SCP311BK	e28, e52, k12
SCP311BS	e28, e52, k12
SCP311CH	e28, e52, k12
SCP311PW	e28, e52, k12
SCP311SS	e28, e52, k12
SCP312BK	e28, e52, k12
SCP312BS	e28, e52, k12
SCP312CH	e28, e52, k12
SCP312PW	e28, e52, k12
SCP312SS	e28, e52, k12
SCP322BK	e20, e21, e36
SCP322BS	e20, e21, e36
SCP322CH	e20, e21, e36
SCP322PW	e20, e21, e36
SCP322SS	e20, e21, e36
SCP323BK	e20, e21, e36
SCP323BS	e20, e21, e36
SCP323CH	e20, e21, e36
SCP323PW	e20, e21, e36
SCP323SS	e20, e21, e36
SCP324BK	e23, e37
SCP324BS	e23, e37
SCP324CH	e23, e37
SCP324PW	e23, e37
SCP324SS	e23, e37
SCP350BK	e16, e44, e46
SCP350BS	e16, e44, e46
SCP350CH	e16, e44, e46
SCP350PW	e16, e44, e46
SCP350RD	e16, e44, e46
SCP350SS	e16, e44, e46
SCP351BK	e16, e44, e46
SCP351BS	e16, e44, e46
SCP351CH	e16, e44, e46
SCP351PW	e16, e44, e46
SCP351RD	e16, e44, e46
SCP351SS	e16, e44, e46
SCP352BK	e16, e44
SCP352BS	e16, e44
SCP352CH	e16, e44
SCP352PW	e16, e44
SCP352SS	e16, e44
SCP353BK	e16, e44
SCP353BS	e16, e44
SCP353CH	e16, e44
SCP353PW	e16, e44
SCP353SS	e16, e44
SCP401BK	a32, e6, e7, e8, e30, j12
SCP401BS	a32, e6, e7, e8, e30, j12
SCP401CH	a32, e6, e7, e8, e30, j12
SCP401PW	a32, e6, e7, e8, e30, j12
SCP401RD	e6, e7, e8, e30, j12
SCP401SS	a32, e6, e7, e8, e30, j12
SCP402BK	a32, e6, e7, e8, e20, e21, e30, e37, j12
SCP402BS	a32, e6, e7, e8, e20, e21, e30, e37, j12
SCP402CH	a32, e6, e7, e8, e20, e21, e30, e37, j12
SCP402PW	a32, e6, e7, e8, e20, e21, e30, e37, j12
SCP402RD	e6, e7, e8, e20, e21, e30, e37, j12
SCP402SS	a32, e6, e7, e8, e20, e21, e30, e37, j12
SCP403BK	a32, e6, e7, e8, e31, j12
SCP403BS	a32, e6, e7, e8, e31, j12
SCP403CH	a32, e6, e7, e8, e31, j12
SCP403PW	a32, e6, e7, e8, e31, j12
SCP403RD	e6, e7, e8, e31, j12
SCP403SS	a32, e6, e7, e8, e31, j12
SCP404BK	a32, e6, e7, e8, e31, j12
SCP404BS	a32, e6, e7, e8, e31, j12
SCP404CH	a32, e6, e7, e8, e31, j12
SCP404PW	a32, e6, e7, e8, e31, j12
SCP404SS	a32, e6, e7, e8, e31, j12
SCP406BK	a32, e6, e7, e8, e32, j12
SCP406BS	a32, e6, e7, e8, e32, j12
SCP406CH	a32, e6, e7, e8, e32, j12
SCP406PW	a32, e6, e7, e8, e32, j12
SCP406SS	a32, e6, e7, e8, e32, j12
SCP422BK	e20, e21, e36
SCP422BS	e20, e21, e36
SCP422CH	e20, e21, e36
SCP422PW	e20, e21, e36
SCP422SS	e20, e21, e36
SCP423BK	e20, e21, e36
SCP423BS	e20, e21, e36
SCP423CH	e20, e21, e36
SCP423PW	e20, e21, e36
SCP423SS	e20, e21, e36
SCP426BK	e8, e32, j12
SCP426BS	e8, e32, j12
SCP426CH	e8, e32, j12
SCP426PW	e8, e32, j12
SCP426SS	e8, e32, j12
SCP430BK	e12, e38
SCP430BS	e12, e38
SCP430CH	e12, e38
SCP430PW	e12, e38
SCP430SS	e12, e38
SCP435BK	e12, e40
SCP435BS	e12, e40
SCP435CH	e12, e40
SCP435PW	e12, e40
SCP435SS	e12, e40
SCP436BK	e12, e40
SCP436BS	e12, e40
SCP436CH	e12, e40
SCP436PW	e12, e40
SCP436RD	e12, e40
SCP436SS	e12, e40
SCP450BK	e17, e45
SCP450BS	e17, e45
SCP450CH	e17, e45
SCP450PW	e17, e45
SCP450SS	e17, e45
SCP451BK	e17, e45
SCP451BS	e17, e45
SCP451CH	e17, e45
SCP451PW	e17, e45
SCP451SS	e17, e45
SCP452BK	e17, e45
SCP452BS	e17, e45
SCP452CH	e17, e45
SCP452PW	e17, e45
SCP452SS	e17, e45
SCP453BK	e17, e45
SCP453BS	e17, e45
SCP453CH	e17, e45
SCP453PW	e17, e45
SCP453SS	e17, e45
SCP470BK	e13, e41
SCP470BS	e13, e41
SCP470CH	e13, e41
SCP470PW	e13, e41
SCP470SS	e13, e41
SCP471BK	e41

SCP471BS	**e41**
SCP471CH	**e41**
SCP471PW	**e41**
SCP471SS	**e41**
SCP471UBK	**e13**
SCP471UBS	**e13**
SCP471UCH	**e13**
SCP471UPW	**e13**
SCP471USS	**e13**
SCP480BK	**e13, e41**
SCP480BS	**e13, e41**
SCP480CH	**e13, e41**
SCP480PW	**e13, e41**
SCP480SS	**e13, e41**
SCP655BK	**e13, e38**
SCP655BS	**e13, e38**
SCP655CH	**e13, e38**
SCP655PW	**e13, e38**
SCP655SS	**e13, e38**
SCP660BK	**e22, e37**
SCP660BS	**e22, e37**
SCP660CH	**e22, e37**
SCP660PW	**e22, e37**
SCP660SS	**e22, e37**
SCP20401BK	**i96**
SCP20401BS	**i96**
SCP20401CH	**i96**
SCP20401PW	**i96**
SCP20401SS	**i96**
SCP20402BK	**i96**
SCP20402BS	**i96**
SCP20402CH	**i96**
SCP20402PW	**i96**
SCP20402SS	**i96**
SCP20403BK	**i97**
SCP20403BS	**i97**
SCP20403CH	**i97**
SCP20403PW	**i97**
SCP20403SS	**i97**
SCP20404BK	**i97**
SCP20404BS	**i97**
SCP20404CH	**i97**
SCP20404PW	**i97**
SCP20404SS	**i97**
SCP20506BK	**i99**
SCP20506BS	**i99**
SCP20506CH	**i99**
SCP20506PW	**i99**
SCP20506SS	**i99**
SCP20508BK	**i99**
SCP20508BS	**i99**
SCP20508CH	**i99**
SCP20508PW	**i99**
SCP20508SS	**i99**
SCP31102BK	**i98**
SCP31102BS	**i98**
SCP31102CH	**i98**
SCP31102PW	**i98**
SCP31102SS	**i98**
SIN011BK	**e6, e30**
SIN011PW	**e6, e30**
SIN012BK	**e6, e30**
SIN012PW	**e6, e30**
SIN013BK	**e6, e31**
SIN013PW	**e6, e31**
SIN019BK	**e6, e31**
SIN019PW	**e6, e31**
SIN020BK	**e20, e37**
SIN020PW	**e20, e37**
SIN022BK	**e20, e36**
SIN022PW	**e20, e36**
SIN023BK	**e20, e36**
SIN023PW	**e20, e36**
SIN024BK	**e23, e37**
SIN024PW	**e23, e37**
SIN025BK	**e6, e30**
SIN025PW	**e6, e30**
SIN034BK	**e22, e39**
SIN034PW	**e22, e39**
SIN035BK	**e12, e40**
SIN035PW	**e12, e40**
SIN036BK	**e12, e40**
SIN036PW	**e12, e40**
SIN036RD	**e12, e40**
SIN038BK	**e22, e39**
SIN038PW	**e22, e39**
SIN039BK	**e22, e39**
SIN039PW	**e22, e39**
SIN050BK	**e14, e42**
SIN050PW	**e14, e42**
SIN051BK	**e14, e42**
SIN051PW	**e14, e42**
SIN052BK	**e14, e42**
SIN052PW	**e14, e42**
SIN053BK	**e14, e42**
SIN053PW	**e14, e42**
SIN060BK	**e23, e37**
SIN060PW	**e23, e37**
SIN061BK	**e23, e37**
SIN061PW	**e23, e37**
SIN065BK	**e27, e50**
SIN065PW	**e27, e50**
SIN066BK	**e27, e51**
SIN066PW	**e27, e51**
SIN100BK	**e23, e38**
SIN100PW	**e23, e38**
SIN105BK	**e6, e32**
SIN105PW	**e6, e32**
SIN115BK	**e26, e48**
SIN115PW	**e26, e48**
SIN120BK	**e26, e49**
SIN120PW	**e26, e49**
SIN121BK	**e26, e49**
SIN121PW	**e26, e49**
SIN125BK	**e26, e49**
SIN125PW	**e26, e49**
SIN126BK	**e26, e49**
SIN126PW	**e26, e49**
SIN140	**e9, e33**
SIN141	**e9, e33**
SIN141PL	**e9, e33**
SIN142	**e9, e33**
SIN142PL	**e9, e33**
SIN143	**e9, e33**
SIN143PL	**e9, e33**
SIN144	**e9, e34**
SIN144PL	**e9, e34**
SIN156BK	**e27, e50**
SIN156PW	**e27, e50**
SIN157BK	**e27, e51**
SIN157PW	**e27, e51**
SIN158BK	**e27, e50**
SIN158PW	**e27, e50**
SIN159BK	**e27, e51**
SIN159PW	**e27, e51**
SIN170BK	**e27, e51**
SIN170PW	**e27, e51**
SIN200BK	**e18, e46**
SIN200PW	**e18, e46**
SIN201BK	**e18, e46**
SIN201PW	**e18, e46**
SIN202BK	**e18, e47**
SIN202PW	**e18, e47**
SIN203BK	**e18, e47**
SIN203PW	**e18, e47**
SIN204BK	**e18, e47**
SIN204PW	**e18, e47**
SIN205BK	**e18, e47**
SIN205PW	**e18, e47**
SIN249RD	**e16, e46**
SIN250BK	**e16, e44**
SIN250PW	**e16, e44**
SIN251BK	**e16, e44**
SIN251PW	**e16, e44**
SIN252BK	**e16, e44**
SIN252PW	**e16, e44**
SIN253BK	**e16, e44**
SIN253PW	**e16, e44**
SIN256RD	**e16, e46**
SIN310BK	**e28, e52, k12**
SIN311BK	**e28, e52, k12**
SIN312BK	**e28, e52, k12**
SIN401BK	**e8, e30, j12**
SIN401PW	**e8, e30, j12**
SIN401RD	**e8, e30, j12**
SIN402BK	**e8, e30, j12**
SIN402PW	**e8, e30, j12**
SIN402RD	**e8, e30, j12**
SIN403BK	**e8, e31, j12**
SIN403PW	**e8, e31, j12**
SIN403RD	**e8, e31, j12**
SIN404BK	**e8, e31, j12**
SIN404PW	**e8, e31, j12**
SIN406BK	**e8, e32, j12**
SIN406PW	**e8, e32, j12**
SIN411BKBS	**e7, e30**
SIN411BKCH	**e7, e30**

SIN411BKSS	**e7, e30**
SIN411PWBS	**e7, e30**
SIN411PWCH	**e7, e30**
SIN411PWSS	**e7, e30**
SIN412BKBS	**e7, e30**
SIN412BKCH	**e7, e30**
SIN412BKSS	**e7, e30**
SIN412PWBS	**e7, e30**
SIN412PWCH	**e7, e30**
SIN412PWSS	**e7, e30**
SIN413BKBS	**e7, e31**
SIN413BKCH	**e7, e31**
SIN413BKSS	**e7, e31**
SIN413PWBS	**e7, e31**
SIN413PWCH	**e7, e31**
SIN413PWSS	**e7, e31**
SIN414BKBS	**e7, e31**
SIN414BKCH	**e7, e31**
SIN414BKSS	**e7, e31**
SIN414PWBS	**e7, e31**
SIN414PWCH	**e7, e31**
SIN414PWSS	**e7, e31**
SIN416BKBS	**e7, e32**
SIN416BKCH	**e7, e32**
SIN416BKSS	**e7, e32**
SIN416PWBS	**e7, e32**
SIN416PWCH	**e7, e32**
SIN416PWSS	**e7, e32**
SIN420CH	**e10, e34**
SIN420PN	**e10, e34**
SIN421CH	**e10, e34**
SIN421PN	**e10, e34**
SIN422CH	**e10, e35**
SIN422PN	**e10, e35**
SIN423CH	**e10, e35**
SIN423PN	**e10, e35**
SIN424CH	**e10, e35**
SIN424PN	**e10, e35**
SIN425BKBS	**e7, e30**
SIN425BKCH	**e7, e30**
SIN425BKSS	**e7, e30**
SIN425PWBS	**e7, e30**
SIN425PWCH	**e7, e30**
SIN425PWSS	**e7, e30**
SIN426BK	**e8, e32, j12**
SIN426PW	**e8, e32, j12**
SIN500BKCH	**e19, e46**
SIN500BKSS	**e19, e46**
SIN500PWBS	**e19, e46**
SIN500PWCH	**e19, e46**
SIN500PWSS	**e19, e46**
SIN501BKBS	**e19, e46**
SIN501BKCH	**e19, e46**
SIN501BKSS	**e19, e46**
SIN501PWBS	**e19, e46**
SIN501PWCH	**e19, e46**
SIN501PWSS	**e19, e46**
SIN502BKBS	**e19, e47**
SIN502BKCH	**e19, e47**
SIN502BKSS	**e19, e47**
SIN502PWBS	**e19, e47**
SIN502PWCH	**e19, e47**
SIN502PWSS	**e19, e47**
SIN503BKBS	**e19, e47**
SIN503BKCH	**e19, e47**
SIN503BKSS	**e19, e47**
SIN503PWBS	**e19, e47**
SIN503PWCH	**e19, e47**
SIN503PWSS	**e19, e47**
SIN504BKBS	**e19, e47**
SIN504BKCH	**e19, e47**
SIN504BKSS	**e19, e47**
SIN504PWBS	**e19, e47**
SIN504PWCH	**e19, e47**
SIN504PWSS	**e19, e47**
SIN505BKBS	**e19, e47**
SIN505BKCH	**e19, e47**
SIN505BKSS	**e19, e47**
SIN505PWBS	**e19, e47**
SIN505PWCH	**e19, e47**
SIN505PWSS	**e19, e47**
SIN520BKBS	**e21, e37**
SIN520BKCH	**e21, e37**
SIN520BKSS	**e21, e37**
SIN520PWBS	**e21, e37**
SIN520PWCH	**e21, e37**
SIN520PWSS	**e21, e37**
SIN522BKBS	**e21, e36**
SIN522BKCH	**e21, e36**
SIN522BKSS	**e21, e36**
SIN522PWBS	**e21, e36**
SIN522PWCH	**e21, e36**
SIN522PWSS	**e21, e36**
SIN523BKBS	**e21, e36**
SIN523BKCH	**e21, e36**
SIN523BKSS	**e21, e36**
SIN523PWBS	**e21, e36**
SIN523PWCH	**e21, e36**
SIN523PWSS	**e21, e36**
SIN535BKBS	**e12, e40**
SIN535BKCH	**e12, e40**
SIN535BKSS	**e12, e40**
SIN535PWBS	**e12, e40**
SIN535PWCH	**e12, e40**
SIN535PWSS	**e12, e40**
SIN536BKBS	**e12, e40**
SIN536BKCH	**e12, e40**
SIN536BKSS	**e12, e40**
SIN536PWBS	**e12, e40**
SIN536PWCH	**e12, e40**
SIN536PWSS	**e12, e40**
SIN550BKBS	**e15, e42**
SIN550BKCH	**e15, e42**
SIN550BKSS	**e15, e42**
SIN550PWBS	**e15, e42**
SIN550PWCH	**e15, e42**
SIN550PWSS	**e15, e42**
SIN551BKBS	**e15, e42**
SIN551BKCH	**e15, e42**
SIN551BKSS	**e15, e42**
SIN551PWBS	**e15, e42**
SIN551PWCH	**e15, e42**
SIN551PWSS	**e15, e42**
SIN552BKBS	**e15, e42**
SIN552BKCH	**e15, e42**
SIN552BKSS	**e15, e42**
SIN552PWBS	**e15, e42**
SIN552PWCH	**e15, e42**
SIN552PWSS	**e15, e42**
SIN553BKBS	**e15, e42**
SIN553BKCH	**e15, e42**
SIN553BKSS	**e15, e42**
SIN553PWBS	**e15, e42**
SIN553PWCH	**e15, e42**
SIN553PWSS	**e15, e42**
SIN570BKBS	**e13, e41**
SIN570BKCH	**e13, e41**
SIN570BKSS	**e13, e41**
SIN570PWBS	**e13, e41**
SIN570PWCH	**e13, e41**
SIN570PWSS	**e13, e41**
SIN571BKBS	**e41**
SIN571BKCH	**e41**
SIN571BKSS	**e41**
SIN571PWBS	**e41**
SIN571PWCH	**e41**
SIN571PWSS	**e41**
SIN571UBKBS	**e13**
SIN571UBKCH	**e13**
SIN571UBKSS	**e13**
SIN571UPWBS	**e13**
SIN571UPWCH	**e13**
SIN571UPWSS	**e13**
SIN580BKBS	**e13, e41**
SIN580BKCH	**e13, e41**
SIN580BKSS	**e13, e41**
SIN580PWBS	**e13, e41**
SIN580PWCH	**e13, e41**
SIN580PWSS	**e13, e41**
SIN622BK	**e20, e36**
SIN622PW	**e20, e36**
SIN623BK	**e20, e36**
SIN623PW	**e20, e36**
SIN630BK	**e12, e38**
SIN630PW	**e12, e38**
SIN650BK	**e14, e43**
SIN650PW	**e14, e43**
SIN651BK	**e14, e43**
SIN651PW	**e14, e43**
SIN652BK	**e14, e43**
SIN652PW	**e14, e43**
SIN653BK	**e14, e43**
SIN653PW	**e14, e43**
SIN655BK	**e13, e38**
SIN655PW	**e13, e38**
SIN660BK	**e22, e37**
SIN722BKBS	**e21, e36**

SIN722BKCH **e21, e36**
SIN722BKSS **e21, e36**
SIN722PWBS **e21, e36**
SIN722PWCH **e21, e36**
SIN722PWSS **e21, e36**
SIN723BKBS **e21, e36**
SIN723BKCH **e21, e36**
SIN723BKSS **e21, e36**
SIN723PWBS **e21, e36**
SIN723PWCH **e21, e36**
SIN723PWSS **e21, e36**
SIN750BKBS **e15, e43**
SIN750BKCH **e15, e43**
SIN750BKSS **e15, e43**
SIN750PWBS **e15, e43**
SIN750PWCH **e15, e43**
SIN750PWSS **e15, e43**
SIN751BKBS **e15, e43**
SIN751BKCH **e15, e43**
SIN751BKSS **e15, e43**
SIN751PWBS **e15, e43**
SIN751PWCH **e15, e43**
SIN751PWSS **e15, e43**
SIN752BKBS **e15, e43**
SIN752BKCH **e15, e43**
SIN752BKSS **e15, e43**
SIN752PWBS **e15, e43**
SIN752PWCH **e15, e43**
SIN752PWSS **e15, e43**
SIN753BKBS **e15, e43**
SIN753BKCH **e15, e43**
SIN753BKSS **e15, e43**
SIN753PWBS **e15, e43**
SIN753PWCH **e15, e43**
SIN753PWSS **e15, e43**
SIN770BK **e13, e41**
SIN770PW **e13, e41**
SIN771BK **e41**
SIN771PW **e41**
SIN771UBK **e13**
SIN771UPW **e13**
SIN780BK **e13, e41**
SIN780PW **e13, e41**
SIN850BK **e17, e45**
SIN850PW **e17, e45**
SIN851BK **e17, e45**
SIN851PW **e17, e45**
SIN852BK **e17, e45**
SIN852PW **e17, e45**
SIN853BK **e17, e45**
SIN853PW **e17, e45**
SIN20200 **i96**
SIN20400 **i97, i99**
SIN31102BK **i98**
SINBK-SMART1 **a31**
SINBK-SMART2 **a31**
SINBK-SMART3 **a31**
SINBK-SMART4 **a31**
SINBK-SMART6 **a31**
SINBSBK-SMART1 **a30**
SINBSBK-SMART2 **a30**
SINBSBK-SMART3 **a30**
SINBSBK-SMART4 **a30**
SINBSBK-SMART6 **a30**
SINBSPW-SMART1 **a30**
SINBSPW-SMART2 **a30**
SINBSPW-SMART3 **a30**
SINBSPW-SMART4 **a30**
SINBSPW-SMART6 **a30**
SINCHBK-SMART1 **a30**
SINCHBK-SMART2 **a30**
SINCHBK-SMART3 **a30**
SINCHBK-SMART4 **a30**
SINCHBK-SMART6 **a30**
SINCHPW-SMART1 **a30**
SINCHPW-SMART2 **a30**
SINCHPW-SMART3 **a30**
SINCHPW-SMART4 **a30**
SINCHPW-SMART6 **a30**
SINPW-SMART1 **a31**
SINPW-SMART2 **a31**
SINPW-SMART3 **a31**
SINPW-SMART4 **a31**
SINPW-SMART6 **a31**
SINSSBK-SMART1 **a30**
SINSSBK-SMART2 **a30**
SINSSBK-SMART3 **a30**
SINSSBK-SMART4 **a30**
SINSSBK-SMART6 **a30**
SINSSPW-SMART1 **a30**
SINSSPW-SMART2 **a30**
SINSSPW-SMART3 **a30**
SINSSPW-SMART4 **a30**
SINSSPW-SMART6 **a30**
SP620BK **k23**
SP620BKAB **k23**
SP620BKBN **k23**
SP620BKBR **k23**
SP620BKBS **k23**
SP620BKCH **k23**
SP620BKPN **k23**
SP620BKSB **k23**
SP620BKSC **k23**
SP620BKSS **k23**
SP620MTBK **k23**
SP620PW **k23**
SP620WH **k23**
SP620WHBR **k23**
SP620WHBS **k23**
SP620WHCH **k23**
SP620WHPN **k23**
SP620WHSB **k23**
SP620WHSC **k23**
SP620WHSS **k23**
SP622 **d23, m6**
SP623 **d23, m6**
SP625 **c29, h16, m6**
SP640BN **d23, e53, m6**
SP640CH **d23, e53, m6**
SP650BN **c29, m6**
SP650BR **c29, m6**
SP650CH **c29, m6**
SP675BN **c29, m6**
SP675BR **c29, m6**
SP675CH **c29, m6**
SP900 **b15, c11, d8, e9, f10, g10, j37, l6**
SP940 **f17**
SP1016 **n4**

V

VPAB011BK **c5**
VPAB012BK **c5**
VPAB013BK **c5**
VPAB019BK **c5**
VPAB020BK **c18**
VPAB022BK **c18**
VPAB023BK **c18**
VPAB024BK **c23**
VPAB025BK **c5**
VPAB035BK **c14**
VPAB036BK **c14**
VPAB038BK **c15**
VPAB039BK **c15**
VPAB050BK **c16**
VPAB051BK **c16**
VPAB052BK **c16**
VPAB053BK **c16**
VPAB060 **c23**
VPAB061 **c23**
VPAB065BK **c27**
VPAB066BK **c27**
VPAB100BK **c23**
VPAB105BK **c5**
VPAB115BK **c26**
VPAB120BK **c26**
VPAB121BK **c26**
VPAB125BK **c26**
VPAB126BK **c26**
VPAB140 **c10**
VPAB152 **c10**
VPAB153 **c10**
VPAB154 **c10**
VPAB156BK **c27**
VPAB157BK **c27**
VPAB158BK **c27**
VPAB159BK **c27**
VPAB170BK **c27**
VPAB185 **c11**
VPAB186 **c11**

VPAB200BK	**c20**
VPAB201BK	**c20**
VPAB202BK	**c20**
VPAB203BK	**c20**
VPAB204BK	**c20**
VPAB205BK	**c20**
VPAB310	**c28, k10**
VPAB311	**c28, k10**
VPAB312	**c28, k10**
VPAB401BK	**c7, j10**
VPAB402BK	**c7, j10**
VPAB403BK	**c7, j10**
VPAB404BK	**c7, j10**
VPAB406BK	**c7, j10**
VPAB411BK	**c6**
VPAB412BK	**c6**
VPAB413BK	**c6**
VPAB414BK	**c6**
VPAB416BK	**c6**
VPAB421	**c12**
VPAB422	**c12**
VPAB423	**c12**
VPAB424	**c12**
VPAB425BK	**c6**
VPAB426BK	**c7, j10**
VPAB432BK	**c7, j10**
VPAB471BK	**c7**
VPAB472BK	**c7**
VPAB500BK	**c21**
VPAB501BK	**c21**
VPAB502BK	**c21**
VPAB503BK	**c21**
VPAB504BK	**c21**
VPAB505BK	**c21**
VPAB512	**c8, j8**
VPAB518	**c8, j8**
VPAB520BK	**c19**
VPAB522BK	**c19**
VPAB523BK	**c19**
VPAB535BK	**c14**
VPAB536BK	**c14**
VPAB550BK	**c17**
VPAB551BK	**c17**
VPAB552BK	**c17**
VPAB553BK	**c17**
VPAB570BK	**c15**
VPAB571UBK	**c15**
VPAB580BK	**c15**
VPAB622BK	**c18**
VPAB623BK	**c18**
VPAB650BK	**c16**
VPAB651BK	**c16**
VPAB652BK	**c16**
VPAB653BK	**c16**
VPAB655BK	**c22**
VPAB660	**c22**
VPAB675BK	**c22**
VPAB722BK	**c19**
VPAB723BK	**c19**
VPAB750BK	**c17**
VPAB751BK	**c17**
VPAB752BK	**c17**
VPAB753BK	**c17**
VPAB770BK	**c15**
VPAB771UBK	**c15**
VPAB780BK	**c15**
VPAB1535BK	**c14**
VPAB1536BK	**c14**
VPAB1836BK	**c14**
VPAB20401	**i112**
VPAB20402	**i112**
VPAB20403	**i113**
VPAB20404	**i113**
VPAB20506	**i115**
VPAB20508	**i115**
VPAB20509	**i116**
VPAB20512	**i116**
VPAB20518	**i117**
VPAB20524	**i118**
VPAB31102	**i114**
VPABBK-SMART1	**a28**
VPABBK-SMART2	**a28**
VPABBK-SMART3	**a28**
VPABBK-SMART4	**a28**
VPABBK-SMART6	**a28**
VPAG512	**h9, j5**
VPAG518	**h9, j6**
VPBN011BK	**c5**
VPBN012BK	**c5**
VPBN013BK	**c5**
VPBN019BK	**c5**
VPBN020BK	**c18**
VPBN022BK	**c18**
VPBN023BK	**c18**
VPBN024BK	**c23**
VPBN025BK	**c5**
VPBN035BK	**c14**
VPBN036BK	**c14**
VPBN038BK	**c15**
VPBN039BK	**c15**
VPBN050BK	**c16**
VPBN051BK	**c16**
VPBN052BK	**c16**
VPBN053BK	**c16**
VPBN060	**c23**
VPBN061	**c23**
VPBN065BK	**c27**
VPBN066BK	**c27**
VPBN100BK	**c23**
VPBN105BK	**c5**
VPBN115BK	**c26**
VPBN120BK	**c26**
VPBN121BK	**c26**
VPBN125BK	**c26**
VPBN126BK	**c26**
VPBN140	**c10**
VPBN152	**c10**
VPBN153	**c10**
VPBN154	**c10**
VPBN156BK	**c27**
VPBN157BK	**c27**
VPBN158BK	**c27**
VPBN159BK	**c27**
VPBN170BK	**c27**
VPBN185	**c11**
VPBN186	**c11**
VPBN200BK	**c20**
VPBN201BK	**c20**
VPBN202BK	**c20**
VPBN203BK	**c20**
VPBN204BK	**c20**
VPBN205BK	**c20**
VPBN310	**c28, k10**
VPBN311	**c28, k10**
VPBN312	**c28, k10**
VPBN401BK	**c7, j10**
VPBN402BK	**c7, j10**
VPBN403BK	**c7, j10**
VPBN404BK	**c7, j10**
VPBN406BK	**c7, j10**
VPBN411BK	**c6**
VPBN412BK	**c6**
VPBN413BK	**c6**
VPBN414BK	**c6**
VPBN416BK	**c6**
VPBN421	**c12**
VPBN422	**c12**
VPBN423	**c12**
VPBN424	**c12**
VPBN425BK	**c6**
VPBN426BK	**c7, j10**
VPBN471BK	**c7**
VPBN472BK	**c7**
VPBN500BK	**c21**
VPBN501BK	**c21**
VPBN502BK	**c21**
VPBN503BK	**c21**
VPBN504BK	**c21**
VPBN505BK	**c21**
VPBN512	**c8, j8**
VPBN518	**c8, j8**
VPBN520BK	**c19**
VPBN522BK	**c19**
VPBN523BK	**c19**
VPBN535BK	**c14**
VPBN536BK	**c14**
VPBN550BK	**c17**
VPBN551BK	**c17**
VPBN552BK	**c17**
VPBN553BK	**c17**
VPBN570BK	**c15**
VPBN571UBK	**c15**
VPBN580BK	**c15**
VPBN622BK	**c18**
VPBN623BK	**c18**
VPBN650BK	**c16**
VPBN651BK	**c16**

VPBN652BK	**c16**	VPBR050BK	**c16**	VPBR401BK	**c7, j10**
VPBN653BK	**c16**	VPBR050WH	**c16**	VPBR401WH	**c7, j10**
VPBN655BK	**c22**	VPBR051BK	**c16**	VPBR402BK	**c7, j10**
VPBN660	**c22**	VPBR051WH	**c16**	VPBR402WH	**c7, j10**
VPBN675BK	**c22**	VPBR052BK	**c16**	VPBR403BK	**c7, j10**
VPBN722BK	**c19**	VPBR052WH	**c16**	VPBR403WH	**c7, j10**
VPBN723BK	**c19**	VPBR053BK	**c16**	VPBR404BK	**c7, j10**
VPBN750BK	**c17**	VPBR053WH	**c16**	VPBR404WH	**c7, j10**
VPBN751BK	**c17**	VPBR060	**c23**	VPBR406BK	**c7, j10**
VPBN752BK	**c17**	VPBR061	**c23**	VPBR406WH	**c7, j10**
VPBN753BK	**c17**	VPBR065BK	**c27**	VPBR411BK	**c6**
VPBN770BK	**c15**	VPBR065WH	**c27**	VPBR411WH	**c6**
VPBN771UBK	**c15**	VPBR066BK	**c27**	VPBR412BK	**c6**
VPBN780BK	**c15**	VPBR066WH	**c27**	VPBR412WH	**c6**
VPBN1535BK	**c14**	VPBR100BK	**c23**	VPBR413BK	**c6**
VPBN1536BK	**c14**	VPBR100WH	**c23**	VPBR413WH	**c6**
VPBN1836BK	**c14**	VPBR105BK	**c5**	VPBR414BK	**c6**
VPBN20401	**i112**	VPBR105WH	**c5**	VPBR414WH	**c6**
VPBN20402	**i112**	VPBR115BK	**c26**	VPBR416BK	**c6**
VPBN20403	**i113**	VPBR115WH	**c26**	VPBR416WH	**c6**
VPBN20404	**i113**	VPBR120BK	**c26**	VPBR421	**c12**
VPBN20506	**i115**	VPBR120WH	**c26**	VPBR422	**c12**
VPBN20508	**i115**	VPBR121BK	**c26**	VPBR423	**c12**
VPBN20509	**i116**	VPBR121WH	**c26**	VPBR424	**c12**
VPBN20512	**i116**	VPBR125BK	**c26**	VPBR425BK	**c6**
VPBN20518	**i117**	VPBR125WH	**c26**	VPBR425WH	**c6**
VPBN20524	**i118**	VPBR126BK	**c26**	VPBR426BK	**c7, j10**
VPBN31102	**i114**	VPBR126WH	**c26**	VPBR426WH	**c7, j10**
VPBNBK-SMART1	**a28**	VPBR140	**c10**	VPBR471BK	**c7**
VPBNBK-SMART2	**a28**	VPBR152	**c10**	VPBR471WH	**c7**
VPBNBK-SMART3	**a28**	VPBR153	**c10**	VPBR472BK	**c7**
VPBNBK-SMART4	**a28**	VPBR154	**c10**	VPBR472WH	**c7**
VPBNBK-SMART6	**a28**	VPBR156BK	**c27**	VPBR512	**c8, j8**
VPBR011BK	**c5**	VPBR156WH	**c27**	VPBR518	**c8, j8**
VPBR011WH	**c5**	VPBR157BK	**c27**	VPBR520BK	**c19**
VPBR012BK	**c5**	VPBR157WH	**c27**	VPBR520WH	**c19**
VPBR012WH	**c5**	VPBR158BK	**c27**	VPBR522BK	**c19**
VPBR013BK	**c5**	VPBR158WH	**c27**	VPBR522WH	**c19**
VPBR013WH	**c5**	VPBR159BK	**c27**	VPBR523BK	**c19**
VPBR019BK	**c5**	VPBR159WH	**c27**	VPBR523WH	**c19**
VPBR019WH	**c5**	VPBR170BK	**c27**	VPBR535BK	**c14**
VPBR020BK	**c18**	VPBR170WH	**c27**	VPBR535WH	**c14**
VPBR020WH	**c18**	VPBR185	**c11**	VPBR536BK	**c14**
VPBR022BK	**c18**	VPBR186	**c11**	VPBR536WH	**c14**
VPBR022WH	**c18**	VPBR200BK	**c20**	VPBR550BK	**c17**
VPBR023BK	**c18**	VPBR200WH	**c20**	VPBR550WH	**c17**
VPBR023WH	**c18**	VPBR201BK	**c20**	VPBR551BK	**c17**
VPBR024BK	**c23**	VPBR201WH	**c20**	VPBR551WH	**c17**
VPBR024WH	**c23**	VPBR202BK	**c20**	VPBR552BK	**c17**
VPBR025BK	**c5**	VPBR202WH	**c20**	VPBR552WH	**c17**
VPBR025WH	**c5**	VPBR203BK	**c20**	VPBR553BK	**c17**
VPBR035BK	**c14**	VPBR203WH	**c20**	VPBR553WH	**c17**
VPBR035WH	**c14**	VPBR204BK	**c20**	VPBR570BK	**c15**
VPBR036BK	**c14**	VPBR204WH	**c20**	VPBR570WH	**c15**
VPBR036WH	**c14**	VPBR205BK	**c20**	VPBR571UBK	**c15**
VPBR038BK	**c15**	VPBR205WH	**c20**	VPBR571UWH	**c15**
VPBR038WH	**c15**	VPBR310	**c28, k10**	VPBR580BK	**c15**
VPBR039BK	**c15**	VPBR311	**c28, k10**	VPBR580WH	**c15**
VPBR039WH	**c15**	VPBR312	**c28, k10**	VPBR622BK	**c18**

VPBR622WH c18
VPBR623BK c18
VPBR623WH c18
VPBR650BK c16
VPBR650WH c16
VPBR651BK c16
VPBR651WH c16
VPBR652BK c16
VPBR652WH c16
VPBR653BK c16
VPBR653WH c16
VPBR655BK c22
VPBR655WH c22
VPBR660 c22
VPBR675BK c22
VPBR675WH c22
VPBR722BK c19
VPBR722WH c19
VPBR723BK c19
VPBR723WH c19
VPBR750BK c17
VPBR750WH c17
VPBR751BK c17
VPBR751WH c17
VPBR752BK c17
VPBR752WH c17
VPBR753BK c17
VPBR753WH c17
VPBR770BK c15
VPBR770WH c15
VPBR771UBK c15
VPBR771UWH c15
VPBR780BK c15
VPBR780WH c15
VPBR1535BK c14
VPBR1535WH c14
VPBR1536BK c14
VPBR1536WH c14
VPBR1836BK c14
VPBR1836WH c14
VPBR20401 i112
VPBR20402 i112
VPBR20403 i113
VPBR20404 i113
VPBR20506 i115
VPBR20508 i115
VPBR20509 i116
VPBR20512 i116
VPBR20518 i117
VPBR20524 i118
VPBR31102 i114
VPBRBK-SMART1 a28
VPBRBK-SMART2 a28
VPBRBK-SMART3 a28
VPBRBK-SMART4 a28
VPBRBK-SMART6 a28
VPBRWH-SMART1 a28
VPBRWH-SMART2 a28
VPBRWH-SMART3 a28
VPBRWH-SMART4 a28
VPBRWH-SMART6 a28
VPCH011BK c5
VPCH011WH c5
VPCH012BK c5
VPCH012WH c5
VPCH013BK c5
VPCH013WH c5
VPCH019BK c5
VPCH019WH c5
VPCH020BK c18
VPCH020WH c18
VPCH022BK c18
VPCH022WH c18
VPCH023BK c18
VPCH023WH c18
VPCH024BK c23
VPCH024WH c23
VPCH025BK c5
VPCH025WH c5
VPCH035BK c14
VPCH035WH c14
VPCH036BK c14
VPCH036WH c14
VPCH038BK c15
VPCH038WH c15
VPCH039BK c15
VPCH039WH c15
VPCH050BK c16
VPCH050WH c16
VPCH051BK c16
VPCH051WH c16
VPCH052BK c16
VPCH052WH c16
VPCH053BK c16
VPCH053WH c16
VPCH060 c23
VPCH061 c23
VPCH065BK c27
VPCH065WH c27
VPCH066BK c27
VPCH066WH c27
VPCH100BK c23
VPCH100WH c23
VPCH105BK c5
VPCH105WH c5
VPCH115BK c26
VPCH115WH c26
VPCH120BK c26
VPCH120WH c26
VPCH121BK c26
VPCH121WH c26
VPCH125BK c26
VPCH125WH c26
VPCH126BK c26
VPCH126WH c26
VPCH140 c10
VPCH140PL c11
VPCH152 c10
VPCH152PL c11
VPCH153 c10
VPCH153PL c11
VPCH154 c10
VPCH154PL c11
VPCH156BK c27
VPCH156WH c27
VPCH157BK c27
VPCH157WH c27
VPCH158BK c27
VPCH158WH c27
VPCH159BK c27
VPCH159WH c27
VPCH170BK c27
VPCH170WH c27
VPCH185 c11
VPCH186 c11
VPCH200BK c20
VPCH200WH c20
VPCH201BK c20
VPCH201WH c20
VPCH202BK c20
VPCH202WH c20
VPCH203BK c20
VPCH203WH c20
VPCH204BK c20
VPCH204WH c20
VPCH205BK c20
VPCH205WH c20
VPCH310 c28, k10
VPCH311 c28, k10
VPCH312 c28, k10
VPCH401BK c7, j10
VPCH401WH c7, j10
VPCH402BK c7, j10
VPCH402WH c7, j10
VPCH403BK c7, j10
VPCH403WH c7, j10
VPCH404BK c7, j10
VPCH404WH c7, j10
VPCH406BK c7, j10
VPCH406WH c7, j10
VPCH411BK c6
VPCH411WH c6
VPCH412BK c6
VPCH412WH c6
VPCH413BK c6
VPCH413WH c6
VPCH414BK c6
VPCH414WH c6
VPCH416BK c6
VPCH416WH c6
VPCH421 c12
VPCH422 c12
VPCH423 c12
VPCH424 c12
VPCH425BK c6
VPCH425WH c6
VPCH426BK c7, j10

VPCH426WH c7, j10
VPCH432BK c7, j10
VPCH432WH c7, j10
VPCH471BK c7
VPCH471WH c7
VPCH472BK c7
VPCH472WH c7
VPCH500BK c21
VPCH500WH c21
VPCH501BK c21
VPCH501WH c21
VPCH502BK c21
VPCH502WH c21
VPCH503BK c21
VPCH503WH c21
VPCH504BK c21
VPCH504WH c21
VPCH505BK c21
VPCH505WH c21
VPCH512 c8, j8
VPCH518 c8, j8
VPCH520BK c19
VPCH520WH c19
VPCH522BK c19
VPCH522WH c19
VPCH523BK c19
VPCH523WH c19
VPCH535BK c14
VPCH535WH c14
VPCH536BK c14
VPCH536WH c14
VPCH550BK c17
VPCH550WH c17
VPCH551BK c17
VPCH551WH c17
VPCH552BK c17
VPCH552WH c17
VPCH553BK c17
VPCH553WH c17
VPCH570BK c15
VPCH570WH c15
VPCH571UBK c15
VPCH571UWH c15
VPCH580BK c15
VPCH580WH c15
VPCH622BK c18
VPCH622WH c18
VPCH623BK c18
VPCH623WH c18
VPCH650BK c16
VPCH650WH c16
VPCH651BK c16
VPCH651WH c16
VPCH652BK c16
VPCH652WH c16
VPCH653BK c16
VPCH653WH c16
VPCH655BK c22
VPCH655WH c22
VPCH660 c22
VPCH675BK c22
VPCH675WH c22
VPCH722BK c19
VPCH722WH c19
VPCH723BK c19
VPCH723WH c19
VPCH750BK c17
VPCH750WH c17
VPCH751BK c17
VPCH751WH c17
VPCH752BK c17
VPCH752WH c17
VPCH753BK c17
VPCH753WH c17
VPCH770BK c15
VPCH770WH c15
VPCH771UBK c15
VPCH771UWH c15
VPCH780BK c15
VPCH780WH c15
VPCH1535BK c14
VPCH1535WH c14
VPCH1536BK c14
VPCH1536WH c14
VPCH1836BK c14
VPCH1836WH c14
VPCH20401 i112
VPCH20402 i112
VPCH20403 i113
VPCH20404 i113
VPCH20506 i115
VPCH20508 i115
VPCH20509 i116
VPCH20512 i116
VPCH20518 i117
VPCH20524 i118
VPCH31102 i114
VPCHBK-SMART1 a28
VPCHBK-SMART2 a28
VPCHBK-SMART3 a28
VPCHBK-SMART4 a28
VPCHBK-SMART6 a28
VPCHWH-SMART1 a28
VPCHWH-SMART2 a28
VPCHWH-SMART3 a28
VPCHWH-SMART4 a28
VPCHWH-SMART6 a28
VPPN011BK c5
VPPN011WH c5
VPPN012BK c5
VPPN012WH c5
VPPN013BK c5
VPPN013WH c5
VPPN019BK c5
VPPN019WH c5
VPPN020BK c18
VPPN020WH c18
VPPN022BK c18
VPPN022WH c18
VPPN023BK c18
VPPN023WH c18
VPPN024BK c23
VPPN024WH c23
VPPN025BK c5
VPPN025WH c5
VPPN035BK c14
VPPN035WH c14
VPPN036BK c14
VPPN036WH c14
VPPN038BK c15
VPPN038WH c15
VPPN039BK c15
VPPN039WH c15
VPPN050BK c16
VPPN050WH c16
VPPN051BK c16
VPPN051WH c16
VPPN052BK c16
VPPN052WH c16
VPPN053BK c16
VPPN053WH c16
VPPN060 c23
VPPN061 c23
VPPN065BK c27
VPPN065WH c27
VPPN066BK c27
VPPN066WH c27
VPPN100BK c23
VPPN100WH c23
VPPN105BK c5
VPPN105WH c5
VPPN115BK c26
VPPN115WH c26
VPPN120BK c26
VPPN120WH c26
VPPN121BK c26
VPPN121WH c26
VPPN125BK c26
VPPN125WH c26
VPPN126BK c26
VPPN126WH c26
VPPN140 c10
VPPN152 c10
VPPN153 c10
VPPN154 c10
VPPN156BK c27
VPPN156WH c27
VPPN157BK c27
VPPN157WH c27
VPPN158BK c27
VPPN158WH c27
VPPN159BK c27
VPPN159WH c27
VPPN170BK c27
VPPN170WH c27
VPPN185 c11
VPPN186 c11

VPPN200BK	c20
VPPN200WH	c20
VPPN201BK	c20
VPPN201WH	c20
VPPN202BK	c20
VPPN202WH	c20
VPPN203BK	c20
VPPN203WH	c20
VPPN204BK	c20
VPPN204WH	c20
VPPN205BK	c20
VPPN205WH	c20
VPPN310	c28, k10
VPPN311	c28, k10
VPPN312	c28, k10
VPPN401BK	c7, j10
VPPN401WH	c7, j10
VPPN402BK	c7, j10
VPPN402WH	c7, j10
VPPN403BK	c7, j10
VPPN403WH	c7, j10
VPPN404BK	c7, j10
VPPN404WH	c7, j10
VPPN406BK	c7, j10
VPPN406WH	c7, j10
VPPN411BK	c6
VPPN411WH	c6
VPPN412BK	c6
VPPN412WH	c6
VPPN413BK	c6
VPPN413WH	c6
VPPN414BK	c6
VPPN414WH	c6
VPPN416BK	c6
VPPN416WH	c6
VPPN421	c12
VPPN422	c12
VPPN423	c12
VPPN424	c12
VPPN425BK	c6
VPPN425WH	c6
VPPN426BK	c7, j10
VPPN426WH	c7, j10
VPPN471BK	c7
VPPN471WH	c7
VPPN472BK	c7
VPPN472WH	c7
VPPN500BK	c21
VPPN500WH	c21
VPPN501BK	c21
VPPN501WH	c21
VPPN502BK	c21
VPPN502WH	c21
VPPN503BK	c21
VPPN503WH	c21
VPPN504BK	c21
VPPN504WH	c21
VPPN505BK	c21
VPPN505WH	c21
VPPN512	c8, j8
VPPN518	c8, j8
VPPN520BK	c19
VPPN520WH	c19
VPPN522BK	c19
VPPN522WH	c19
VPPN523BK	c19
VPPN523WH	c19
VPPN535BK	c14
VPPN535WH	c14
VPPN536BK	c14
VPPN536WH	c14
VPPN550BK	c17
VPPN550WH	c17
VPPN551BK	c17
VPPN551WH	c17
VPPN552BK	c17
VPPN552WH	c17
VPPN553BK	c17
VPPN553WH	c17
VPPN570BK	c15
VPPN570WH	c15
VPPN571UBK	c15
VPPN571UWH	c15
VPPN580BK	c15
VPPN580WH	c15
VPPN622BK	c18
VPPN622WH	c18
VPPN623BK	c18
VPPN623WH	c18
VPPN650BK	c16
VPPN650WH	c16
VPPN651BK	c16
VPPN651WH	c16
VPPN652BK	c16
VPPN652WH	c16
VPPN653BK	c16
VPPN653WH	c16
VPPN655BK	c22
VPPN655WH	c22
VPPN660	c22
VPPN675BK	c22
VPPN675WH	c22
VPPN722BK	c19
VPPN722WH	c19
VPPN723BK	c19
VPPN723WH	c19
VPPN750BK	c17
VPPN750WH	c17
VPPN751BK	c17
VPPN751WH	c17
VPPN752BK	c17
VPPN752WH	c17
VPPN753BK	c17
VPPN753WH	c17
VPPN770BK	c15
VPPN770WH	c15
VPPN771UBK	c15
VPPN771UWH	c15
VPPN780BK	c15
VPPN780WH	c15
VPPN1535BK	c14
VPPN1535WH	c14
VPPN1536BK	c14
VPPN1536WH	c14
VPPN1836BK	c14
VPPN1836WH	c14
VPPN20401	i112
VPPN20402	i112
VPPN20403	i113
VPPN20404	i113
VPPN20506	i115
VPPN20508	i115
VPPN20509	i116
VPPN20512	i116
VPPN20518	i117
VPPN20524	i118
VPPN31102	i114
VPSB011BK	c5
VPSB011WH	c5
VPSB012BK	c5
VPSB012WH	c5
VPSB013BK	c5
VPSB013WH	c5
VPSB019BK	c5
VPSB019WH	c5
VPSB020BK	c18
VPSB020WH	c18
VPSB022BK	c18
VPSB022WH	c18
VPSB023BK	c18
VPSB023WH	c18
VPSB024BK	c23
VPSB024WH	c23
VPSB025BK	c5
VPSB025WH	c5
VPSB035BK	c14
VPSB035WH	c14
VPSB036BK	c14
VPSB036WH	c14
VPSB038BK	c15
VPSB038WH	c15
VPSB039BK	c15
VPSB039WH	c15
VPSB050BK	c16
VPSB050WH	c16
VPSB051BK	c16
VPSB051WH	c16
VPSB052BK	c16
VPSB052WH	c16
VPSB053BK	c16
VPSB053WH	c16
VPSB060	c23
VPSB061	c23
VPSB065BK	c27
VPSB065WH	c27
VPSB066BK	c27
VPSB066WH	c27

VPSB100BK	c23
VPSB100WH	c23
VPSB105BK	c5
VPSB105WH	c5
VPSB115BK	c26
VPSB115WH	c26
VPSB120BK	c26
VPSB120WH	c26
VPSB121BK	c26
VPSB121WH	c26
VPSB125BK	c26
VPSB125WH	c26
VPSB126BK	c26
VPSB126WH	c26
VPSB140	c10
VPSB152	c10
VPSB153	c10
VPSB154	c10
VPSB156BK	c27
VPSB156WH	c27
VPSB157BK	c27
VPSB157WH	c27
VPSB158BK	c27
VPSB158WH	c27
VPSB159BK	c27
VPSB159WH	c27
VPSB170BK	c27
VPSB170WH	c27
VPSB185	c11
VPSB186	c11
VPSB200BK	c20
VPSB200WH	c20
VPSB201BK	c20
VPSB201WH	c20
VPSB202BK	c20
VPSB202WH	c20
VPSB203BK	c20
VPSB203WH	c20
VPSB204BK	c20
VPSB204WH	c20
VPSB205BK	c20
VPSB205WH	c20
VPSB310	c28, k10
VPSB311	c28, k10
VPSB312	c28, k10
VPSB401BK	c7, j10
VPSB401WH	c7, j10
VPSB402BK	c7, j10
VPSB402WH	c7, j10
VPSB403BK	c7, j10
VPSB403WH	c7, j10
VPSB404BK	c7, j10
VPSB404WH	c7, j10
VPSB406BK	c7, j10
VPSB406WH	c7, j10
VPSB411BK	c6
VPSB411WH	c6
VPSB412BK	c6
VPSB412WH	c6
VPSB413BK	c6
VPSB413WH	c6
VPSB414BK	c6
VPSB414WH	c6
VPSB416BK	c6
VPSB416WH	c6
VPSB421	c12
VPSB422	c12
VPSB423	c12
VPSB424	c12
VPSB425BK	c6
VPSB425WH	c6
VPSB426BK	c7, j10
VPSB426WH	c7, j10
VPSB471BK	c7
VPSB471WH	c7
VPSB472BK	c7
VPSB472WH	c7
VPSB512	c8, j8
VPSB518	c8, j8
VPSB520BK	c19
VPSB520WH	c19
VPSB522BK	c19
VPSB522WH	c19
VPSB523BK	c19
VPSB523WH	c19
VPSB535BK	c14
VPSB535WH	c14
VPSB536BK	c14
VPSB536WH	c14
VPSB550BK	c17
VPSB550WH	c17
VPSB551BK	c17
VPSB551WH	c17
VPSB552BK	c17
VPSB552WH	c17
VPSB553BK	c17
VPSB553WH	c17
VPSB570BK	c15
VPSB570WH	c15
VPSB571UBK	c15
VPSB571UWH	c15
VPSB580BK	c15
VPSB580WH	c15
VPSB622BK	c18
VPSB622WH	c18
VPSB623BK	c18
VPSB623WH	c18
VPSB650BK	c16
VPSB650WH	c16
VPSB651BK	c16
VPSB651WH	c16
VPSB652BK	c16
VPSB652WH	c16
VPSB653BK	c16
VPSB653WH	c16
VPSB655BK	c22
VPSB655WH	c22
VPSB660	c22
VPSB675BK	c22
VPSB675WH	c22
VPSB722BK	c19
VPSB722WH	c19
VPSB723BK	c19
VPSB723WH	c19
VPSB750BK	c17
VPSB750WH	c17
VPSB751BK	c17
VPSB751WH	c17
VPSB752BK	c17
VPSB752WH	c17
VPSB753BK	c17
VPSB753WH	c17
VPSB770BK	c15
VPSB770WH	c15
VPSB771UBK	c15
VPSB771UWH	c15
VPSB780BK	c15
VPSB780WH	c15
VPSB1535BK	c14
VPSB1535WH	c14
VPSB1536BK	c14
VPSB1536WH	c14
VPSB1836BK	c14
VPSB1836WH	c14
VPSB20401	i112
VPSB20402	i112
VPSB20403	i113
VPSB20404	i113
VPSB20506	i115
VPSB20508	i115
VPSB20509	i116
VPSB20512	i116
VPSB20518	i117
VPSB20524	i118
VPSB31102	i114
VPSBBK-SMART1	a28
VPSBBK-SMART2	a28
VPSBBK-SMART3	a28
VPSBBK-SMART4	a28
VPSBBK-SMART6	a28
VPSBWH-SMART1	a28
VPSBWH-SMART2	a28
VPSBWH-SMART3	a28
VPSBWH-SMART4	a28
VPSBWH-SMART6	a28
VPSC011BK	c5
VPSC011WH	c5
VPSC012BK	c5
VPSC012WH	c5
VPSC013BK	c5
VPSC013WH	c5
VPSC019BK	c5
VPSC019WH	c5
VPSC020BK	c18
VPSC020WH	c18
VPSC022BK	c18
VPSC022WH	c18
VPSC023BK	c18
VPSC023WH	c18
VPSC024BK	c23
VPSC024WH	c23
VPSC025BK	c5
VPSC025WH	c5

VPSC035BK c14
VPSC035WH c14
VPSC036BK c14
VPSC036WH c14
VPSC038BK c15
VPSC038WH c15
VPSC039BK c15
VPSC039WH c15
VPSC050BK c16
VPSC050WH c16
VPSC051BK c16
VPSC051WH c16
VPSC052BK c16
VPSC052WH c16
VPSC053BK c16
VPSC053WH c16
VPSC060 c23
VPSC061 c23
VPSC065BK c27
VPSC065WH c27
VPSC066BK c27
VPSC066WH c27
VPSC100BK c23
VPSC100WH c23
VPSC105BK c5
VPSC105WH c5
VPSC115BK c26
VPSC115WH c26
VPSC120BK c26
VPSC120WH c26
VPSC121BK c26
VPSC121WH c26
VPSC125BK c26
VPSC125WH c26
VPSC126BK c26
VPSC126WH c26
VPSC140 c10
VPSC140PL c11
VPSC152 c10
VPSC152PL c11
VPSC153 c10
VPSC153PL c11
VPSC154 c10
VPSC154PL c11
VPSC156BK c27
VPSC156WH c27
VPSC157BK c27
VPSC157WH c27
VPSC158BK c27
VPSC158WH c27
VPSC159BK c27
VPSC159WH c27
VPSC170BK c27
VPSC170WH c27
VPSC185 c11
VPSC186 c11
VPSC200BK c20
VPSC200WH c20
VPSC201BK c20
VPSC201WH c20
VPSC202BK c20
VPSC202WH c20
VPSC203BK c20
VPSC203WH c20
VPSC204BK c20
VPSC204WH c20
VPSC205BK c20
VPSC205WH c20
VPSC310 c28, k10
VPSC311 c28, k10
VPSC312 c28, k10
VPSC401BK c7, j10
VPSC401WH c7, j10
VPSC402BK c7, j10
VPSC402WH c7, j10
VPSC403BK c7, j10
VPSC403WH c7, j10
VPSC404BK c7, j10
VPSC404WH c7, j10
VPSC406BK c7, j10
VPSC406WH c7, j10
VPSC411BK c6
VPSC411WH c6
VPSC412BK c6
VPSC412WH c6
VPSC413BK c6
VPSC413WH c6
VPSC414BK c6
VPSC414WH c6
VPSC416BK c6
VPSC416WH c6
VPSC421 c12
VPSC422 c12
VPSC423 c12
VPSC424 c12
VPSC425BK c6
VPSC425WH c6
VPSC426BK c7, j10
VPSC426WH c7, j10
VPSC432BK c7, j10
VPSC432WH c7, j10
VPSC471BK c7
VPSC471WH c7
VPSC472BK c7
VPSC472WH c7
VPSC500BK c21
VPSC500WH c21
VPSC501BK c21
VPSC501WH c21
VPSC502BK c21
VPSC502WH c21
VPSC503BK c21
VPSC503WH c21
VPSC504BK c21
VPSC504WH c21
VPSC505BK c21
VPSC505WH c21
VPSC512 c8, j8
VPSC518 c8, j8
VPSC520BK c19
VPSC520WH c19
VPSC522BK c19
VPSC522WH c19
VPSC523BK c19
VPSC523WH c19
VPSC535BK c14
VPSC535WH c14
VPSC536BK c14
VPSC536WH c14
VPSC550BK c17
VPSC550WH c17
VPSC551BK c17
VPSC551WH c17
VPSC552BK c17
VPSC552WH c17
VPSC553BK c17
VPSC553WH c17
VPSC570BK c15
VPSC570WH c15
VPSC571UBK c15
VPSC571UWH c15
VPSC580BK c15
VPSC580WH c15
VPSC622BK c18
VPSC622WH c18
VPSC623BK c18
VPSC623WH c18
VPSC650BK c16
VPSC650WH c16
VPSC651BK c16
VPSC651WH c16
VPSC652BK c16
VPSC652WH c16
VPSC653BK c16
VPSC653WH c16
VPSC655BK c22
VPSC655WH c22
VPSC660 c22
VPSC675BK c22
VPSC675WH c22
VPSC722BK c19
VPSC722WH c19
VPSC723BK c19
VPSC723WH c19
VPSC750BK c17
VPSC750WH c17
VPSC751BK c17
VPSC751WH c17
VPSC752BK c17
VPSC752WH c17
VPSC753BK c17
VPSC753WH c17
VPSC770BK c15
VPSC770WH c15
VPSC771UBK c15
VPSC771UWH c15
VPSC780BK c15
VPSC780WH c15
VPSC1535BK c14
VPSC1535WH c14
VPSC1536BK c14
VPSC1536WH c14
VPSC1836BK c14

VPSC1836WH	c14
VPSC20401	i112
VPSC20402	i112
VPSC20403	i113
VPSC20404	i113
VPSC20506	i115
VPSC20508	i115
VPSC20509	i116
VPSC20512	i116
VPSC20518	i117
VPSC20524	i118
VPSC31102	i114
VPSCBK-SMART1	a28
VPSCBK-SMART2	a28
VPSCBK-SMART3	a28
VPSCBK-SMART4	a28
VPSCBK-SMART6	a28
VPSCWH-SMART1	a28
VPSCWH-SMART2	a28
VPSCWH-SMART3	a28
VPSCWH-SMART4	a28
VPSCWH-SMART6	a28
VPSS011BK	c5
VPSS011WH	c5
VPSS012BK	c5
VPSS012WH	c5
VPSS013BK	c5
VPSS013WH	c5
VPSS019BK	c5
VPSS019WH	c5
VPSS020BK	c18
VPSS020WH	c18
VPSS022BK	c18
VPSS022WH	c18
VPSS023BK	c18
VPSS023WH	c18
VPSS024BK	c23
VPSS024WH	c23
VPSS025BK	c5
VPSS025WH	c5
VPSS035BK	c14
VPSS035WH	c14
VPSS036BK	c14
VPSS036WH	c14
VPSS038BK	c15
VPSS038WH	c15
VPSS039BK	c15
VPSS039WH	c15
VPSS050BK	c16
VPSS050WH	c16
VPSS051BK	c16
VPSS051WH	c16
VPSS052BK	c16
VPSS052WH	c16
VPSS053BK	c16
VPSS053WH	c16
VPSS060	c23
VPSS061	c23
VPSS065BK	c27
VPSS065WH	c27
VPSS066BK	c27
VPSS066WH	c27
VPSS100BK	c23
VPSS100WH	c23
VPSS105BK	c5
VPSS105WH	c5
VPSS115BK	c26
VPSS115WH	c26
VPSS120BK	c26
VPSS120WH	c26
VPSS121BK	c26
VPSS121WH	c26
VPSS125BK	c26
VPSS125WH	c26
VPSS126BK	c26
VPSS126WH	c26
VPSS140	c10
VPSS152	c10
VPSS153	c10
VPSS154	c10
VPSS156BK	c27
VPSS156WH	c27
VPSS157BK	c27
VPSS157WH	c27
VPSS158BK	c27
VPSS158WH	c27
VPSS159BK	c27
VPSS159WH	c27
VPSS170BK	c27
VPSS170WH	c27
VPSS185	c11
VPSS186	c11
VPSS200BK	c20
VPSS200WH	c20
VPSS201BK	c20
VPSS201WH	c20
VPSS202BK	c20
VPSS202WH	c20
VPSS203BK	c20
VPSS203WH	c20
VPSS204BK	c20
VPSS204WH	c20
VPSS205BK	c20
VPSS205WH	c20
VPSS310	c28, k10
VPSS311	c28, k10
VPSS312	c28, k10
VPSS401BK	c7, j10
VPSS401WH	c7, j10
VPSS402BK	c7, j10
VPSS402WH	c7, j10
VPSS403BK	c7, j10
VPSS403WH	c7, j10
VPSS404BK	c7, j10
VPSS404WH	c7, j10
VPSS406BK	c7, j10
VPSS406WH	c7, j10
VPSS411BK	c6
VPSS411WH	c6
VPSS412BK	c6
VPSS412WH	c6
VPSS413BK	c6
VPSS413WH	c6
VPSS414BK	c6
VPSS414WH	c6
VPSS416BK	c6
VPSS416WH	c6
VPSS421	c12
VPSS422	c12
VPSS423	c12
VPSS424	c12
VPSS425BK	c6
VPSS425WH	c6
VPSS426BK	c7, j10
VPSS426WH	c7, j10
VPSS432BK	c7, j10
VPSS432WH	c7, j10
VPSS471BK	c7
VPSS471WH	c7
VPSS472BK	c7
VPSS472WH	c7
VPSS500BK	c21
VPSS500WH	c21
VPSS501BK	c21
VPSS501WH	c21
VPSS502BK	c21
VPSS502WH	c21
VPSS503BK	c21
VPSS503WH	c21
VPSS504BK	c21
VPSS504WH	c21
VPSS505BK	c21
VPSS505WH	c21
VPSS512	c8, j8
VPSS518	c8, j8
VPSS520BK	c19
VPSS520WH	c19
VPSS522BK	c19
VPSS522WH	c19
VPSS523BK	c19
VPSS523WH	c19
VPSS535BK	c14
VPSS535WH	c14
VPSS536BK	c14
VPSS536WH	c14
VPSS550BK	c17
VPSS550WH	c17
VPSS551BK	c17
VPSS551WH	c17
VPSS552BK	c17
VPSS552WH	c17
VPSS553BK	c17
VPSS553WH	c17
VPSS570BK	c15
VPSS570WH	c15
VPSS571UBK	c15
VPSS571UWH	c15
VPSS580BK	c15
VPSS580WH	c15
VPSS622BK	c18
VPSS622WH	c18
VPSS623BK	c18
VPSS623WH	c18
VPSS650BK	c16
VPSS650WH	c16
VPSS651BK	c16
VPSS651WH	c16
VPSS652BK	c16
VPSS652WH	c16

VPSS653BK **c16**
VPSS653WH **c16**
VPSS655BK **c22**
VPSS655WH **c22**
VPSS660 **c22**
VPSS675BK **c22**
VPSS675WH **c22**
VPSS722BK **c19**
VPSS722WH **c19**
VPSS723BK **c19**
VPSS723WH **c19**
VPSS750BK **c17**
VPSS750WH **c17**
VPSS751BK **c17**
VPSS751WH **c17**
VPSS752BK **c17**
VPSS752WH **c17**
VPSS753BK **c17**
VPSS753WH **c17**
VPSS770BK **c15**
VPSS770WH **c15**
VPSS771UBK **c15**
VPSS771UWH **c15**
VPSS780BK **c15**
VPSS780WH **c15**
VPSS1535BK **c14**
VPSS1535WH **c14**
VPSS1536BK **c14**
VPSS1536WH **c14**
VPSS1836BK **c14**
VPSS1836WH **c14**
VPSS20401 **i112**
VPSS20402 **i112**
VPSS20403 **i113**
VPSS20404 **i113**
VPSS20506 **i115**
VPSS20508 **i115**
VPSS20509 **i116**
VPSS20512 **i116**
VPSS20518 **i117**
VPSS20524 **i118**
VPSS31102 **i114**
VPSSBK-SMART1 **a28**
VPSSBK-SMART2 **a28**
VPSSBK-SMART3 **a28**
VPSSBK-SMART4 **a28**
VPSSBK-SMART6 **a28**
VPSSWH-SMART1 **a28**
VPSSWH-SMART2 **a28**
VPSSWH-SMART3 **a28**
VPSSWH-SMART4 **a28**
VPSSWH-SMART6 **a28**

W

WA037RD **m24**
WA049RD **m25**
WA056RD **m25**
WA070 **m32**
WA071 **m32**
WA072 **m32**
WA073 **m32**
WA074 **m32**
WA075 **m32**
WA076 **m32**
WA077 **m32**
WA078 **m32**
WA079 **m32**
WA081RD **m24**
WA087P **c30, d24, e54, f28, g26, h20, l17, m7**
WA088P **c30, d24, e54, f28, g26, h20, l17, m7**
WA092 **d23, e53, f28, g26, h20, l17, m4**
WA093 **c29, d23, e53, f28, g26, h20, l17, m4**
WA094 **c29, d23, e53, f28, g26, h20, l17, m4**
WA095 **c29, d23, e53, f28, g26, h20, l17, m4**
WA096 **c29, d23, e53, f28, g26, h20, l17, m4**
WA097 **c29, d23, e53, f28, g26, h20, l17, m4**
WA098 **d23, e53, f28, g26, h20, l17, m4**
WA099 **d23, e53, f28, g26, h20, l17, m4**
WA102 **d23, e53, f28, g26, h20, l17, m4**
WA106P **c30, d24, e54, f28, g26, h20, l17, m7**
WA107P **c30, d24, e54, f28, g26, h20, l17, m7**
WA108P **c30, d24, e54, f28, g26, h20, l17, m7**
WA179 **m24**
WA180 **m24**
WA185 **m24**
WA220 **m33**
WA222 **m33**
WA227 **m33**
WA228 **m33**
WA370 **b34, c29, m4**
WA375 **b34, c29, m4**
WA401RD **j16, m25**
WA402RD **j16, m25**
WA403RD **j16, m25**
WA512 **b19, c9, f9, g9, h10, i138, j7, m5**
WA518 **b19, c9, f9, g9, h10, i138, j7, m5**
WA571 **c29, m4**
WA572 **c29, m4**
WA671 **b34, f28, g26, m4**
WA672 **b34, f28, g26, m4**
WA4135 **c30, d24, e54, f28, g26, h20, l17, m8**
WA4147 **c30, d24, e54, f28, g26, h20, l17, m8**
WA4235 **c30, d24, e54, f28, g26, h20, l17, m8**
WA4247 **c30, d24, e54, f28, g26, h20, l17, m8**
WA20518 **i139, m5**
WA20524 **i139, m5**